


2024/05/08 1453Z

EFHK POGUR HUY LKC02 VHHH

4218.07 nm / 7811.87 km

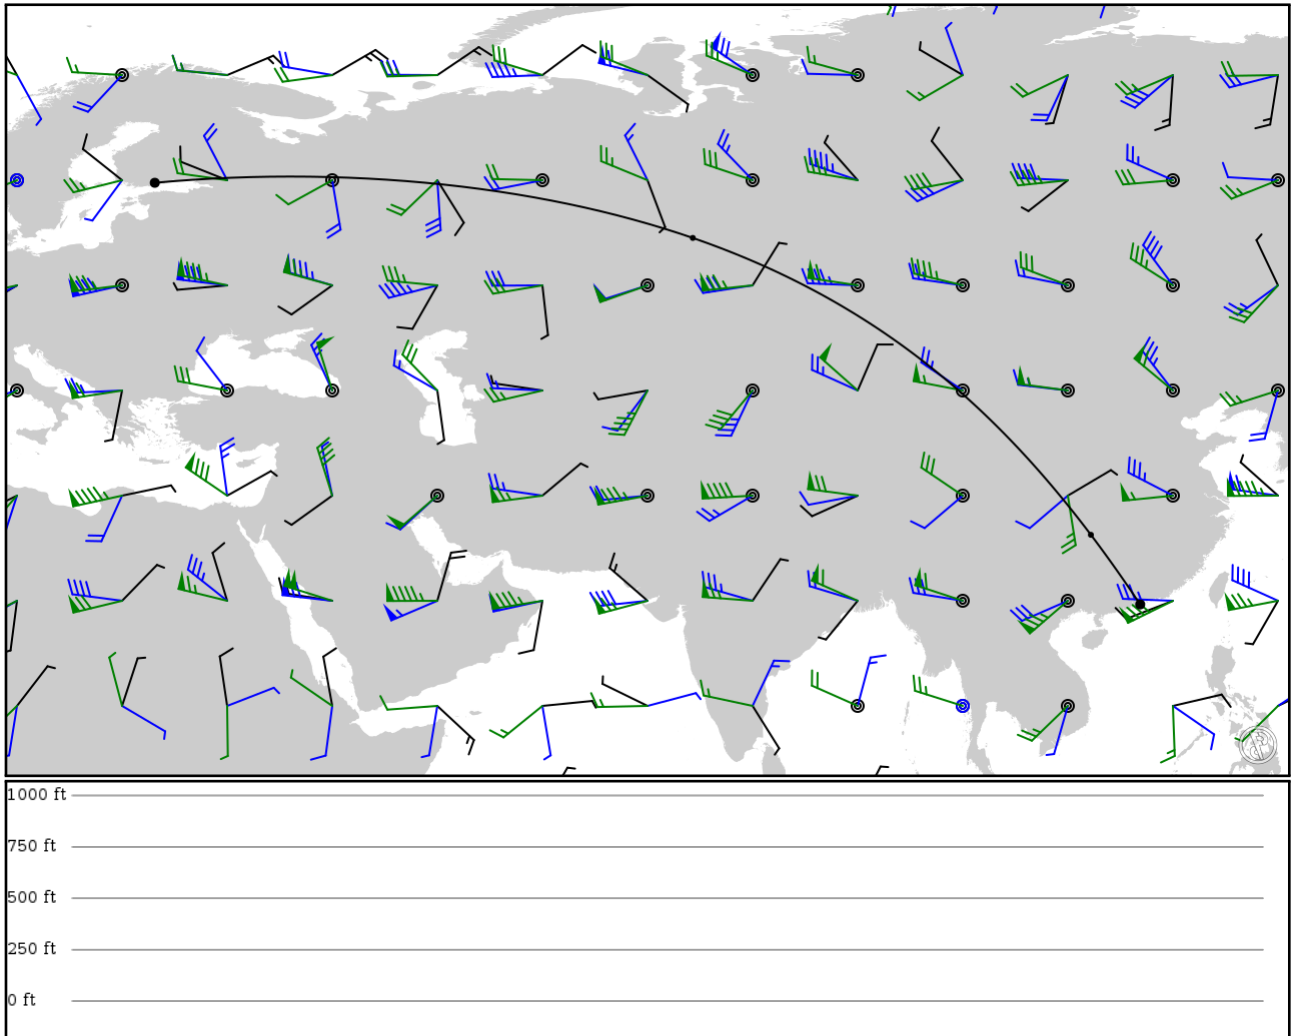

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EFHK	-	60.33028	0 ft	-	-
APT	-	24.96450	0 m		
POGUR	-	55.35667	0 ft	1543	-
FIX	-	73.52000	0 m		
HUY	-	28.57667	0 ft	2227	HUAYUAN VOR-DME
VOR	-	109.44833	0 m		
LKC02	-	22.35652	0 ft	443	-
FIX	-	113.85701	0 m		
VHHH	-	22.29628	0 ft	4	-
APT	-	113.89799	0 m		

EFHK

Region: FINLAND

Timezone: EUROPE/HELSINKI

Runways: 3

Elevation: 180 ft / 55 m

Location: 60.320400 24.952200

Magnetic Var: 9.961 E

METAR

EFHK 081420Z 02008KT 330V050 CAVOK 09/M12 Q1027 NOSIG

TAF

TAF TAF EFHK 081435Z 0815/0915 35005KT CAVOK BECMG 0909/0911 21010KT

Frequencies

REC - 135.07 MHz - ATIS ARRIVAL

TWR - 119.70 MHz - HELSINKI TOWER

TWR - 118.60 MHz - HELSINKI TOWER

GND - 118.12 MHz - HELSINKI GROUND

APP - 119.10 MHz - HELSINKI RADAR APPROACH

APP - 119.70 MHz - HELSINKI RADAR APPROACH

APP - 119.90 MHz - HELSINKI ARRIVAL

REC - 114.20 MHz - ATIS DEPARTURE

TWR - 118.85 MHz - HELSINKI TOWER

GND - 121.80 MHz - HELSINKI GROUND

GND - 121.65 MHz - HELSINKI RAMP/TAXI

APP - 129.85 MHz - HELSINKI RADAR APPROACH

APP - 124.32 MHz - HELSINKI ARRIVAL

GND - 127.02 MHz - HELSINKI DE-ICING

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	197 ft	11,459 ft	47.48	ASPHALT	978 ft	210 ft
	60 m	3,493 m	37.52		298 m	64 m
22L	197 ft	11,459 ft	227.52	ASPHALT	0 ft	207 ft
	60 m	3,493 m	217.56		0 m	63 m
04L	197 ft	10,047 ft	47.42	ASPHALT	0 ft	236 ft
	60 m	3,062 m	37.46		0 m	72 m
22R	197 ft	10,047 ft	227.46	ASPHALT	253 ft	177 ft
	60 m	3,062 m	217.50		77 m	54 m
15	197 ft	9,497 ft	153.07	ASPHALT	0 ft	194 ft
	60 m	2,895 m	143.11		0 m	59 m
33	197 ft	9,497 ft	333.09	ASPHALT	0 ft	197 ft
	60 m	2,895 m	323.13		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	HTV	111.90 MHz	18 nm	-	-	165 ft
				33 km	-		165 m
04R	DME	HG	111.50 MHz	18 nm	-	-	206 ft
				33 km	-		206 m
15	DME	HL	109.10 MHz	18 nm	-	-	220 ft
				33 km	-		220 m
22L	DME	HK	110.30 MHz	18 nm	-	-	205 ft
				33 km	-		205 m
22R	DME	HUO	110.70 MHz	18 nm	-	-	207 ft
				33 km	-		207 m
04L	LOC-ILS	HTV	111.90 MHz	18 nm	47.45	-	180 ft
				33 km	37.49		180 m
04R	LOC-ILS	HG	111.50 MHz	18 nm	47.51	-	180 ft
				33 km	37.55		180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	HL	109.10 MHz	18 nm	153.08	-	180 ft
				33 km	143.12		180 m
22L	LOC-ILS	HK	110.30 MHz	18 nm	227.51	-	180 ft
				33 km	217.55		180 m
22R	LOC-ILS	HUO	110.70 MHz	18 nm	227.45	-	180 ft
				33 km	217.49		180 m
04L	GS	HTV	111.90 MHz	10 nm	47.45	3.00	180 ft
				19 km	37.49		180 m
04R	GS	HG	111.50 MHz	10 nm	47.51	3.00	180 ft
				19 km	37.55		180 m
15	GS	HL	109.10 MHz	10 nm	153.08	3.00	180 ft
				19 km	143.12		180 m
22L	GS	HK	110.30 MHz	10 nm	227.51	3.00	180 ft
				19 km	217.55		180 m
22R	GS	HUO	110.70 MHz	10 nm	227.45	3.00	180 ft
				19 km	217.49		180 m

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.237 W

METAR

VHHH 081430Z 07009KT 9999 FEW030 27/20 Q1015 NOSIG

TAF

TAF VHHH 081400Z 0815/0921 09015KT 9000 FEW025 SCT035 TX29/0906Z TN25/0822Z TEMPO 0904/0911 09015G25KT

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.02		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.02		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m