

FIMP

Sir Seewoosagur Ramgoolam Intl


WSSS

Singapore Changi

2024/05/10 0411Z

FIMP PLS **N633** PKU **R469** ASUNA WSSS

3024.29 nm / 5600.99 km

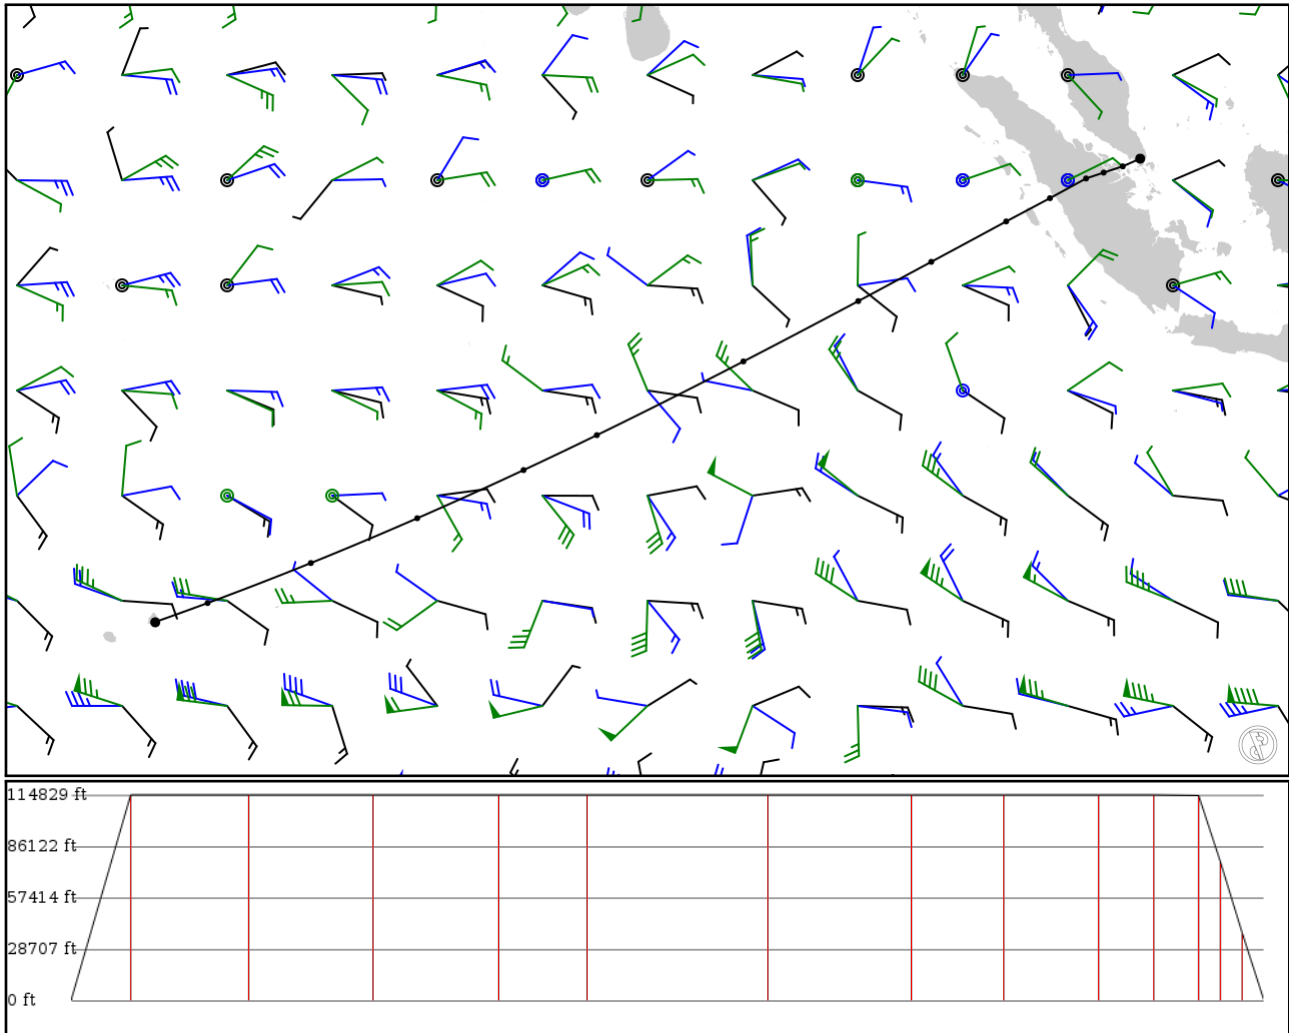

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIMP APT	-	-20.43020 57.68360	0 ft 0 m	-	Sir Seewoosagur Ramgoolam Intl
PLS VOR	-	-20.42000 57.66240	400 ft 122 m	1	PLAISANCE (MAURITIUS)
OVTIS FIX	N633 AWY-HI	-19.52360 60.14560	35,000 ft 10,668 m	150	-
PADSO FIX	N633 AWY-HI	-17.64420 65.00000	35,000 ft 10,668 m	298	-
PAKTI FIX	N633 AWY-HI	-15.53970 70.00000	35,000 ft 10,668 m	314	-
PEDPI FIX	N633 AWY-HI	-13.27670 75.00000	35,000 ft 10,668 m	321	-
PANDU FIX	N633 AWY-HI	-11.63500 78.44330	35,000 ft 10,668 m	224	-
SAKEG FIX	N633 AWY-HI	-8.17132 85.33430	35,000 ft 10,668 m	457	-
PIBED FIX	N633 AWY-HI	-5.33667 90.73330	35,000 ft 10,668 m	364	-
POSOD FIX	N633 AWY-HI	-3.49167 94.16500	35,000 ft 10,668 m	233	-
OBMAT FIX	N633 AWY-HI	-1.59350 97.68780	35,000 ft 10,668 m	240	-
TAPIN FIX	N633 AWY-HI	-0.50026 99.74480	35,000 ft 10,668 m	139	-
PKU VOR	N633 AWY-HI	0.42559 101.44200	34,900 ft 10,638 m	116	PEKANBARU
TAROS FIX	R469 AWY-HI	0.70000 102.27000	23,600 ft 7,193 m	52	-
ASUNA FIX	R469 AWY-HI	0.99667 103.16500	11,500 ft 3,505 m	56	-
WSSS APT	-	1.35561 103.98800	0 ft 0 m	53	Singapore Changi

FIMP

Region: MAURITIUS
Timezone: INDIAN/MAURITIUS
Runways: 1

Elevation: 183 ft / 56 m
Location: -20.430200 57.683600
Magnetic Var: 18.071 W

METAR

FIMP 100400Z 12012KT 9999 BKN017 25/20 Q1018

TAF

TAF FIMP 092350Z 1000/1106 12010G25KT 9999 SCT018=

Frequencies

REC - 126.20 MHz - MAURITIUS ATIS
APP - 119.10 MHz - MAURITIUS APPROACH
TWR - 118.10 MHz - MAURITIUS TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14	148 ft	11,073 ft	117.17	ASPHALT	1,086 ft	203 ft
	45 m	3,375 m	135.25		331 m	62 m
32	148 ft	11,073 ft	297.17	ASPHALT	0 ft	197 ft
	45 m	3,375 m	315.24		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
14	DME	IPL	109.90 MHz	18 nm	-	-	186 ft
				33 km	-		186 m
14	LOC-ILS	IPL	109.90 MHz	18 nm	117.12	-	183 ft
				33 km	135.19		183 m
14	GS	IPL	109.90 MHz	10 nm	117.12	3.50	183 ft
				19 km	135.19		183 m

WSSS

Region: SINGAPORE
Timezone: ASIA/SINGAPORE
Runways: 2

Elevation: 20 ft / 6 m
Location: 1.355510 103.988000
Magnetic Var: 0.198 E

METAR

WSSS 100400Z 18012KT 7000 -TSRA FEW014 FEW016CB FEW017TCU SCT040 26/25 Q1010 BECMG TL0415 NSW

TAF

TAF AMD WSSS 100255Z 1002/1106 14008KT 9999 FEW015 SCT020 TEMPO 1003/1006 3000 TSRA FEW012CB BKN015

Frequencies

DEP - 123.70 MHz - SINGAPORE RADAR	DEP - 127.30 MHz - SINGAPORE RADAR
DEP - 133.80 MHz - SINGAPORE RADAR	DEP - 133.25 MHz - SINGAPORE RADAR
DEP - 135.80 MHz - SINGAPORE RADAR	DEP - 134.20 MHz - SINGAPORE RADAR
DEP - 133.35 MHz - SINGAPORE RADAR	DEP - 134.40 MHz - SINGAPORE RADAR
DEP - 128.10 MHz - SINGAPORE RADAR	DEP - 255.40 MHz - SINGAPORE RADAR
DEP - 124.05 MHz - SINGAPORE RADAR	APP - 120.30 MHz - SINGAPORE APPROACH
APP - 124.60 MHz - SINGAPORE APPROACH	APP - 119.30 MHz - SINGAPORE ARRIVAL
TWR - 118.60 MHz - SINGAPORE TOWER	TWR - 118.25 MHz - SINGAPORE TOWER
GND - 124.30 MHz - SINGAPORE GROUND	GND - 121.72 MHz - SINGAPORE GROUND
GND - 121.85 MHz - SINGAPORE GROUND	GND - 121.00 MHz - SINGAPORE GROUND EMERGENCY
GND - 122.55 MHz - SINGAPORE GROUND	CLD - 121.65 MHz - SINGAPORE DELIVERY
CLD - 119.60 MHz - SINGAPORE DELIVERY	REC - 128.60 MHz -
REC - 128.02 MHz -	CHANGI AIRPORT INFORMATION (D-ATIS)
CHANGI AIRPORT ARRIVAL INFORMATION	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02L	197 ft	13,187 ft	22.88	ASPHALT	0 ft	0 ft
	60 m	4,020 m	22.68		0 m	0 m
20R	197 ft	13,187 ft	202.88	ASPHALT	2,428 ft	390 ft
	60 m	4,020 m	202.68		740 m	119 m
02C	197 ft	13,187 ft	22.88	ASPHALT	0 ft	0 ft
	60 m	4,020 m	22.68		0 m	0 m
20C	197 ft	13,187 ft	202.88	ASPHALT	0 ft	0 ft
	60 m	4,020 m	202.68		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02C	DME	ICE	108.30 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
02L	DME	ICW	110.90 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
20C	DME	ICC	109.70 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
20R	DME	ICH	108.90 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
02C	LOC-ILS	ICE	108.30 MHz	18 nm	22.88	-	20 ft
				33 km	22.68		20 m
02L	LOC-ILS	ICW	110.90 MHz	18 nm	22.88	-	20 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	22.68		20 m
20C	LOC-ILS	ICC	109.70 MHz	18 nm	202.88	-	20 ft
				33 km	202.68		20 m
20R	LOC-ILS	ICH	108.90 MHz	18 nm	202.88	-	20 ft
				33 km	202.68		20 m
02C	GS	ICE	108.30 MHz	10 nm	22.88	3.00	20 ft
				19 km	22.68		20 m
02L	GS	ICW	110.90 MHz	10 nm	22.88	3.00	20 ft
				19 km	22.68		20 m
20C	GS	ICC	109.70 MHz	10 nm	202.88	3.00	20 ft
				19 km	202.68		20 m
20R	GS	ICH	108.90 MHz	10 nm	202.88	3.00	20 ft
				19 km	202.68		20 m