


2024/05/23 0308Z

LIML ROBAS LIRQ

129.07 nm / 239.03 km

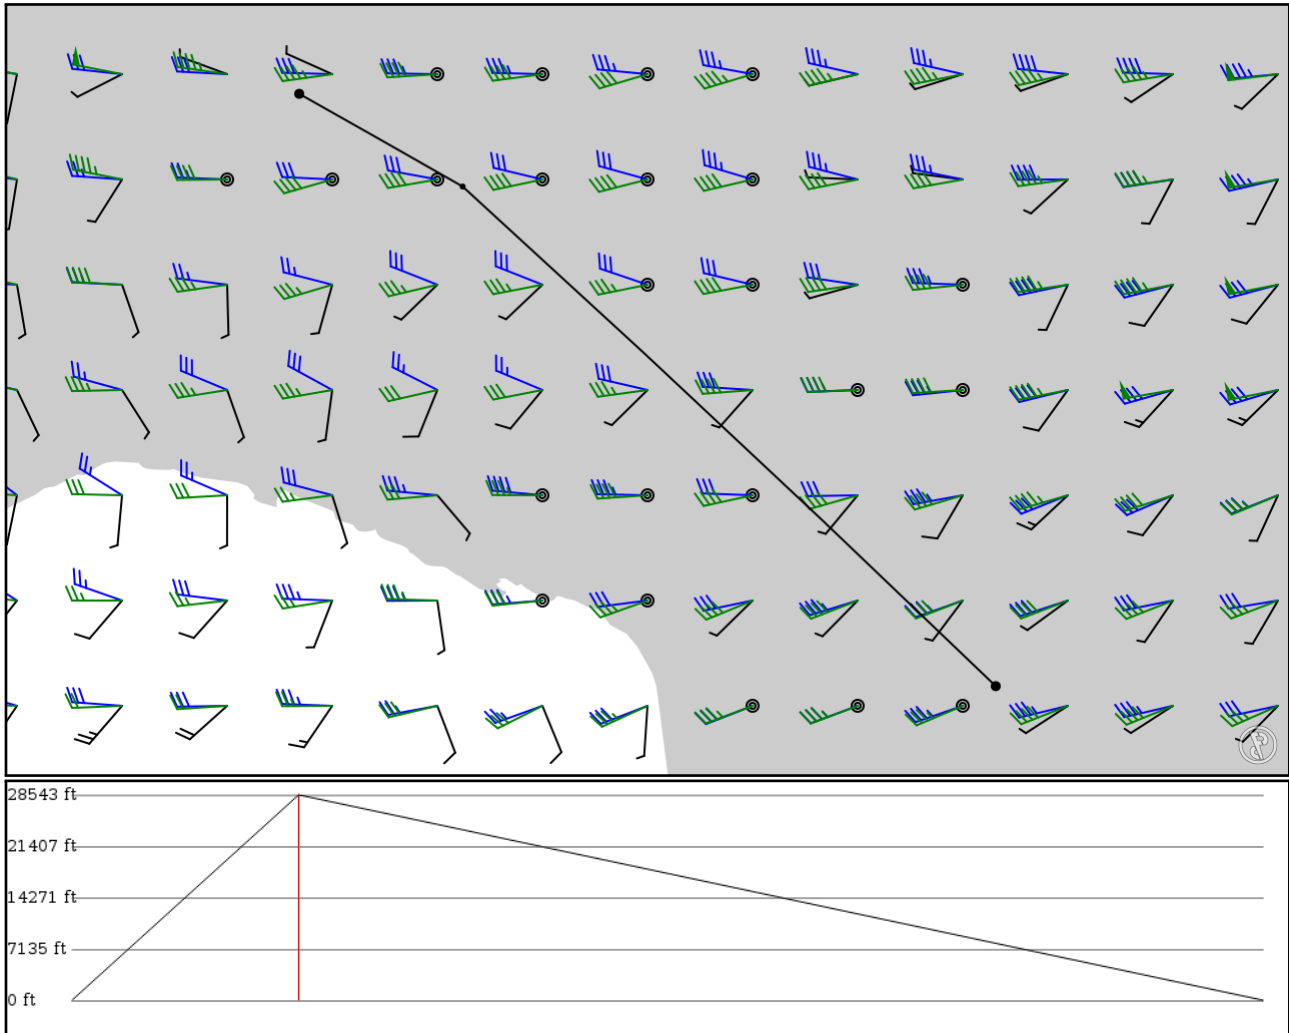

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIML	-	45.45030	0 ft	-	Milano Linate
APT	-	9.27280	0 m		
ROBAS	-	45.19361	8,700 ft	24	-
FIX	-	9.72611	2,652 m		
LIRQ	-	43.80998	0 ft	104	Firenze
APT	-	11.20512	0 m		

LIML

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 354 ft / 108 m
Location: 45.450300 9.272810
Magnetic Var: 3.243 E

METAR

LIML 230220Z 00000KT 9999 SCT090 14/14 Q1015 NOSIG

TAF

TAF LIML 222300Z 2300/2324 VRB05KT 9999 SCT050 TEMPO 2300/2306 4000 TSRA BKN012 TEMPO 2306/2310 4000 SHRA BKN008 T

Frequencies

REC - 136.37 MHz - ATIS
TWR - 118.40 MHz - LINATE TOWER
APP - 134.17 MHz - MILANO RADAR
APP - 126.30 MHz - MILANO RADAR
GND - 121.80 MHz - LINATE GROUND
TWR - 118.10 MHz - LINATE TOWER
APP - 126.75 MHz - MILANO RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	197 ft	8,019 ft	175.67	ASPHALT	0 ft	200 ft
	60 m	2,444 m	172.43		0 m	61 m
36	197 ft	8,019 ft	355.67	ASPHALT	0 ft	413 ft
	60 m	2,444 m	352.43		0 m	126 m
17	72 ft	1,974 ft	175.66	ASPHALT	0 ft	0 ft
	22 m	602 m	172.42		0 m	0 m
35	72 ft	1,974 ft	355.66	ASPHALT	0 ft	0 ft
	22 m	602 m	352.42		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36	DME	ILNT	109.55 MHz	25 nm	-	-	352 ft
				46 km	-		352 m
36	LOC-ILS	ILNT	109.55 MHz	18 nm	355.69	-	353 ft
				33 km	352.44		353 m
36	GS	ILNT	109.55 MHz	10 nm	355.68	3.00	352 ft
				19 km	352.44		352 m

LIRQ

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 142 ft / 43 m
Location: 43.810000 11.205100
Magnetic Var: 3.582 E

METAR

LIRQ 230220Z 10004KT 9999 FEW030 13/11 Q1017

TAF

TAF LIRQ 222300Z 2300/2324 VRB05KT 9999 SCT030 BECMG 2308/2310 25014KT PROB30 TEMPO 2314/2318 SHRA BECMG 2317/2319 25014KT

Frequencies

REC - 129.35 MHz - ATIS
TWR - 122.10 MHz - FIRENZE TOWER
TWR - 118.30 MHz - FIRENZE TOWER
APP - 125.82 MHz - FIRENZE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	98 ft	5,123 ft	48.10	ASPHALT	338 ft	0 ft
	30 m	1,561 m	44.52		103 m	0 m
23	98 ft	5,123 ft	228.11	ASPHALT	1,903 ft	0 ft
	30 m	1,561 m	224.53		580 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	DME	IFZ	110.30 MHz	18 nm	-	-	144 ft
				33 km	-		144 m
05	LOC-ILS	IFZ	110.30 MHz	18 nm	48.10	-	131 ft
				33 km	44.52		131 m
05	GS	IFZ	110.30 MHz	10 nm	47.00	3.00	144 ft
				19 km	43.42		144 m