

KORD

Chicago O'Hare Intl


KBQR

BUFFALO LANCASTER

2024/05/16 0444Z

KORD AZO V116 SVM V2 YQO KBQR

416.67 nm / 771.67 km

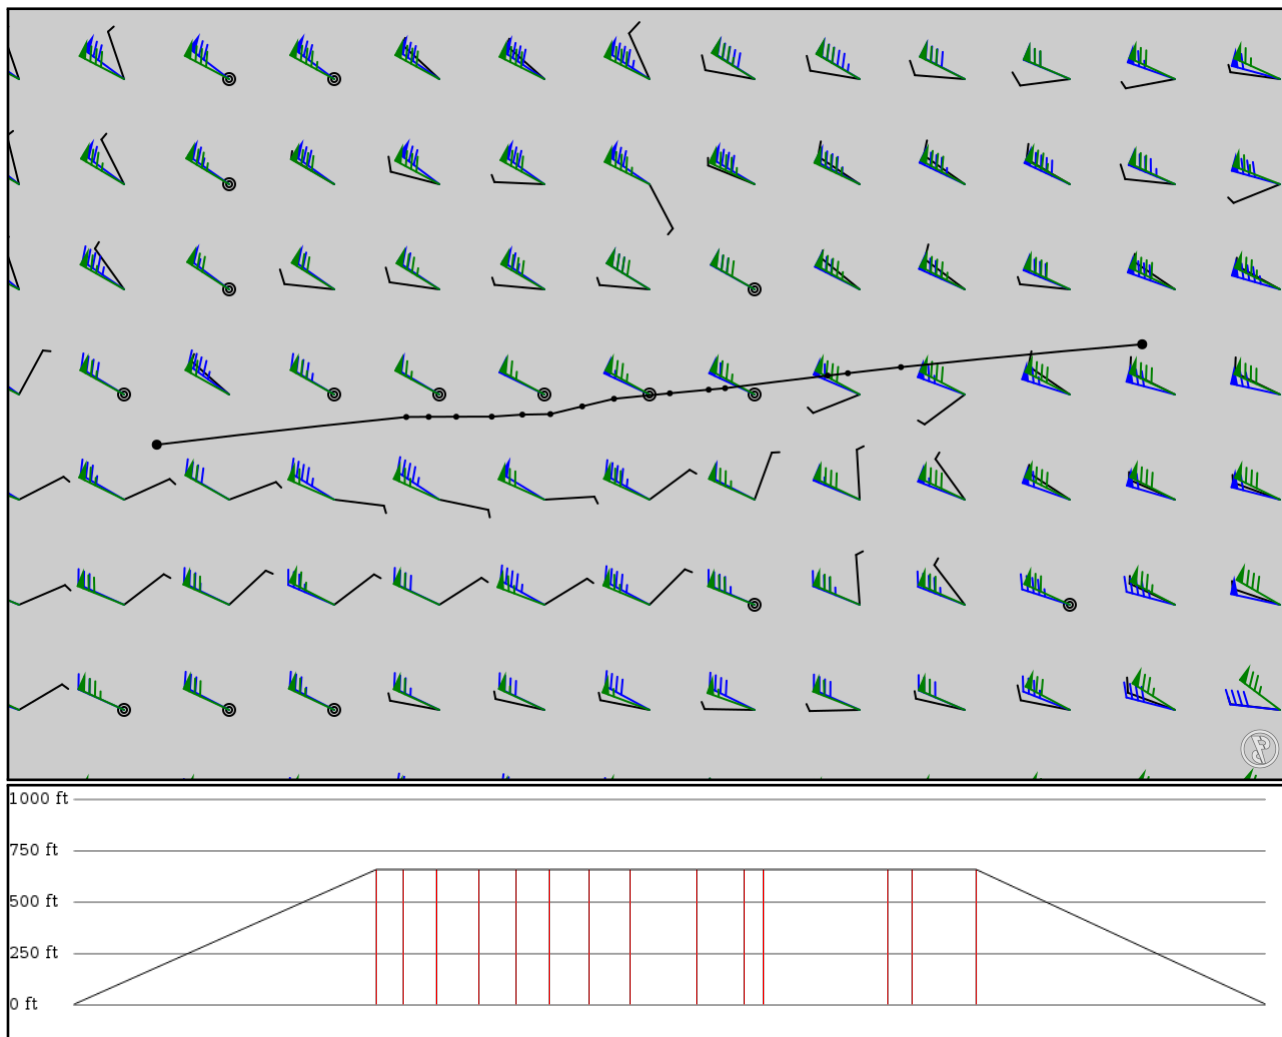

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 200kts
- Cruise Altitude: 200ft
- Cruise Speed: 400kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KORD APT	-	41.97570 -87.90640	0 ft 0 m	-	Chicago O'Hare Intl
AZO VOR	-	42.23700 -85.55320	200 ft 61 m	106	KALAMAZOO
LERoy FIX	V116 AWY-LO	42.23840 -85.34170	200 ft 61 m	9	-
ZEGBI FIX	V116 AWY-LO	42.23950 -85.08200	200 ft 61 m	11	-
ECKDO FIX	V116 AWY-LO	42.24010 -84.74700	200 ft 61 m	14	-
JXN VOR	V116 AWY-LO	42.25920 -84.45850	200 ft 61 m	12	JACKSON
HARWL FIX	V116 AWY-LO	42.26400 -84.19410	200 ft 61 m	11	-
DEXER FIX	V116 AWY-LO	42.33700 -83.89370	200 ft 61 m	14	-
SVM VOR	V116 AWY-LO	42.40860 -83.59390	200 ft 61 m	13	SALEM
DELOW FIX	V2 AWY-LO	42.46020 -83.06760	200 ft 61 m	23	-
SVM40 FIX	V2 AWY-LO	42.49430 -82.70110	200 ft 61 m	16	-
SPICA FIX	V2 AWY-LO	42.50840 -82.54630	200 ft 61 m	6	-
WOLIS FIX	V2 AWY-LO	42.62720 -81.57830	200 ft 61 m	43	-
DUSUT FIX	V2 AWY-LO	42.64950 -81.38850	200 ft 61 m	8	-
YQO VOR	V2 AWY-LO	42.70680 -80.88800	200 ft 61 m	22	AYLMER
KBQR APT	-	42.92230 -78.61230	0 ft 0 m	101	BUFFALO LANCASTER

KORD

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 6

Elevation: 680 ft / 207 m
Location: 41.973400 -87.906600
Magnetic Var: 4.112 W

METAR

KORD 160351Z 03005KT 10SM SCT250 13/06 A2990 RMK AO2 SLP123 T01280056

TAF

TAF AMD KORD 160300Z 1603/1706 02005KT P6SM FEW050 SCT250 FM161200 15005KT P6SM SCT040 BKN250 FM161600 20011KT P6SM

Frequencies

REC - 135.40 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 119.25 MHz - CLEARANCE DELIVERY	CLD - 121.60 MHz - CLEARANCE DELIVERY
GND - 118.05 MHz - O'HARE GROUND	GND - 121.67 MHz - O'HARE GROUND
GND - 121.75 MHz - O'HARE GROUND	GND - 121.90 MHz - O'HARE GROUND
GND - 124.12 MHz - O'HARE GROUND	GND - 134.12 MHz - O'HARE GROUND
TWR - 120.75 MHz - O'HARE TOWER	TWR - 121.15 MHz - O'HARE TOWER
TWR - 126.90 MHz - O'HARE TOWER	TWR - 127.92 MHz - O'HARE TOWER
TWR - 132.70 MHz - O'HARE TOWER	TWR - 128.15 MHz - O'HARE TOWER
TWR - 133.00 MHz - O'HARE TOWER	APP - 119.00 MHz - CHICAGO APPROACH
APP - 133.62 MHz - CHICAGO APPROACH	APP - 124.35 MHz - CHICAGO APPROACH
APP - 125.70 MHz - CHICAGO APPROACH	DEP - 125.00 MHz - CHICAGO DEPARTURE
DEP - 125.40 MHz - CHICAGO DEPARTURE	DEP - 127.40 MHz - CHICAGO DEPARTURE
DEP - 128.80 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10C	200 ft	10,789 ft	89.85	CONCRETE	0 ft	397 ft
	61 m	3,289 m	93.96		0 m	121 m
28C	200 ft	10,789 ft	269.88	CONCRETE	0 ft	381 ft
	61 m	3,289 m	273.99		0 m	116 m
10L	151 ft	12,996 ft	89.87	CONCRETE	0 ft	394 ft
	46 m	3,961 m	93.99		0 m	120 m
28R	151 ft	12,996 ft	269.91	CONCRETE	0 ft	285 ft
	46 m	3,961 m	274.02		0 m	87 m
04R	151 ft	8,074 ft	41.40	CONCRETE	0 ft	850 ft
	46 m	2,461 m	45.51		0 m	259 m
22L	151 ft	8,074 ft	221.41	CONCRETE	0 ft	584 ft
	46 m	2,461 m	225.53		0 m	178 m
09R	151 ft	7,949 ft	89.98	CONCRETE	0 ft	148 ft
	46 m	2,423 m	94.09		0 m	45 m
27L	151 ft	7,949 ft	270.00	CONCRETE	0 ft	197 ft
	46 m	2,423 m	274.11		0 m	60 m
09L	151 ft	7,484 ft	89.99	CONCRETE	0 ft	397 ft
	46 m	2,281 m	94.10		0 m	121 m
27R	151 ft	7,484 ft	270.00	CONCRETE	0 ft	397 ft
	46 m	2,281 m	274.12		0 m	121 m
10R	151 ft	7,484 ft	89.85	CONCRETE	0 ft	400 ft
	46 m	2,281 m	93.96		0 m	122 m
28L	151 ft	7,484 ft	269.87	CONCRETE	0 ft	400 ft
	46 m	2,281 m	273.98		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	ISAJ	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
10L	DME	IMED	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
27L	DME	IIAC	110.50 MHz	18 nm	-	-	641 ft
				33 km	-		641 m
27R	DME	IABU	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
28R	DME	ITSL	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
04R	LOC-ILS	IFJU	110.10 MHz	18 nm	41.41	-	680 ft
				33 km	45.52		680 m
09L	LOC-ILS	ISAJ	111.75 MHz	18 nm	90.00	-	680 ft
				33 km	94.11		680 m
09R	LOC-ILS	IJAV	110.50 MHz	18 nm	89.99	-	680 ft
				33 km	94.10		680 m
10L	LOC-ILS	IMED	111.10 MHz	18 nm	89.89	-	680 ft
				33 km	94.00		680 m
10C	LOC-ILS	ISXH	108.95 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
10R	LOC-ILS	IIZJ	110.75 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
22L	LOC-ILS	ILQQ	110.10 MHz	18 nm	221.41	-	680 ft
				33 km	225.52		680 m
27L	LOC-ILS	IIAC	110.50 MHz	18 nm	269.99	-	680 ft
				33 km	274.10		680 m
27R	LOC-ILS	IABU	111.75 MHz	18 nm	270.00	-	680 ft
				33 km	274.11		680 m
28L	LOC-ILS	IVQX	110.75 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28C	LOC-ILS	IVZE	108.95 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28R	LOC-ILS	ITSL	111.10 MHz	18 nm	269.88	-	680 ft
				33 km	273.99		680 m
04R	GS	IFJU	110.10 MHz	10 nm	41.41	3.00	680 ft
				19 km	45.52		680 m
09L	GS	ISAJ	111.75 MHz	10 nm	90.00	3.00	680 ft
				19 km	94.11		680 m
09R	GS	IJAV	110.50 MHz	10 nm	89.99	3.00	680 ft
				19 km	94.10		680 m
10L	GS	IMED	111.10 MHz	10 nm	89.89	3.00	680 ft
				19 km	94.00		680 m
10C	GS	ISXH	108.95 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
10R	GS	IIZJ	110.75 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
22L	GS	ILQQ	110.10 MHz	10 nm	221.41	3.00	680 ft
				19 km	225.52		680 m
27L	GS	IIAC	110.50 MHz	10 nm	269.99	3.00	680 ft
				19 km	274.10		680 m
27R	GS	IABU	111.75 MHz	10 nm	270.00	3.00	680 ft
				19 km	274.11		680 m
28L	GS	IVQX	110.75 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28C	GS	IVZE	108.95 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28R	GS	ITSL	111.10 MHz	10 nm	269.88	3.00	680 ft
				19 km	273.99		680 m