


2024/05/10 2049Z

LIBP GUBIN **M872** LIKNO **Q95** LUTOR LIME

274.19 nm / 507.81 km

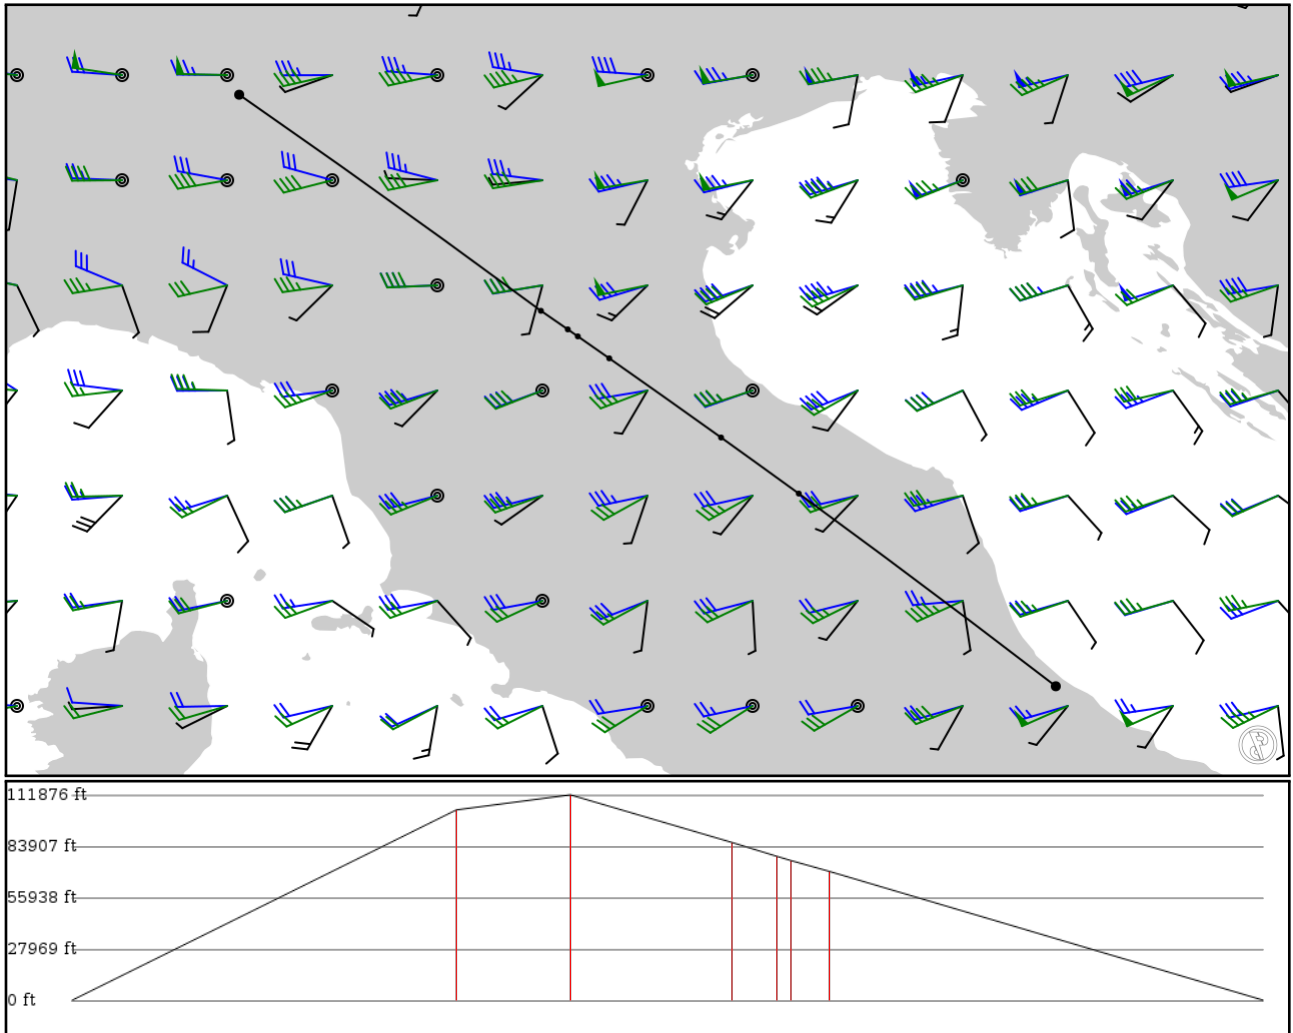

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIBP	-	42.43120	0 ft	-	Pescara
APT	-	14.18300	0 m		
GUBIN	-	43.48690	31,600 ft	88	-
FIX	-	12.77420	9,632 m		
LIKNO	M872	43.79390	34,100 ft	26	-
FIX	AWY-HI	12.34830	10,394 m		
PELEG	Q95	44.22780	26,200 ft	37	-
FIX	AWY-HI	11.73530	7,986 m		
PETAS	Q95	44.34810	23,900 ft	10	-
FIX	AWY-HI	11.56310	7,285 m		
PIGAK	Q95	44.38640	23,200 ft	3	-
FIX	AWY-HI	11.50810	7,071 m		
LUTOR	Q95	44.48810	21,400 ft	8	-
FIX	AWY-HI	11.36080	6,523 m		
LIME	-	45.67200	0 ft	99	Bergamo Orio Al Serio
APT	-	9.70691	0 m		

## LIBP

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 1

Elevation: 45 ft / 14 m  
Location: 42.431200 14.182900  
Magnetic Var: 4.055 E

## METAR

LIBP 102020Z AUTO 23004KT 9999 NCD 14/09 Q1017

## TAF

TAF LIBP 101700Z 1018/1118 01010KT 9999 SCT060 BECMG 1018/1019 VRB05KT BECMG 1106/1108 01012KT BECMG 1116/1118 VR

## Frequencies

TWR - 118.45 MHz - PESCARA TOWER

APP - 120.05 MHz - PESCARA APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	7,943 ft	37.38	ASPHALT	341 ft	0 ft
	46 m	2,421 m	33.32		104 m	0 m
22	151 ft	7,943 ft	217.39	ASPHALT	610 ft	0 ft
	46 m	2,421 m	213.33		186 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	DME	IPS	110.70 MHz	18 nm	-	-	48 ft
				33 km	-		48 m
22	LOC-ILS	IPS	110.70 MHz	18 nm	217.39	-	48 ft
				33 km	213.34		48 m
22	GS	IPS	110.70 MHz	10 nm	217.40	3.00	48 ft
				19 km	213.34		48 m

## LIME

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 776 ft / 237 m  
Location: 45.672000 9.706810  
Magnetic Var: 3.343 E

## METAR

LIME 102020Z 01005KT CAVOK 18/13 Q1019 NOSIG

## TAF

TAF LIME 101700Z 1018/1118 VRB05KT CAVOK

## Frequencies

GND - 120.50 MHz - ORIO GROUND  
REC - 114.95 MHz - ATIS  
APP - 126.75 MHz - MILANO RADAR

TWR - 125.87 MHz - ORIO TOWER  
APP - 126.30 MHz - MILANO RADAR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	59 ft	2,670 ft	121.46	ASPHALT	200 ft	0 ft
	18 m	814 m	118.12		61 m	0 m
30	59 ft	2,670 ft	301.47	ASPHALT	312 ft	0 ft
	18 m	814 m	298.12		95 m	0 m
10	148 ft	9,439 ft	104.87	ASPHALT	718 ft	0 ft
	45 m	2,877 m	101.53		219 m	0 m
28	148 ft	9,439 ft	284.90	ASPHALT	443 ft	0 ft
	45 m	2,877 m	281.55		135 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	DME	BRM	108.70 MHz	18 nm	-	-	779 ft
				33 km	-		779 m
28	LOC-ILS	BRM	108.70 MHz	18 nm	285.08	-	779 ft
				33 km	281.74		779 m
28	GS	BRM	108.70 MHz	10 nm	285.80	3.00	779 ft
				19 km	282.46		779 m