

KBOS

General Edward Lawrence Logan Intl


CYYZ

Toronto Pearson Intl

2024/05/07 0443Z

KBOS GRAVE V14 ALB V2 SYR Q812 AHPAH CYYZ

389.82 nm / 721.95 km

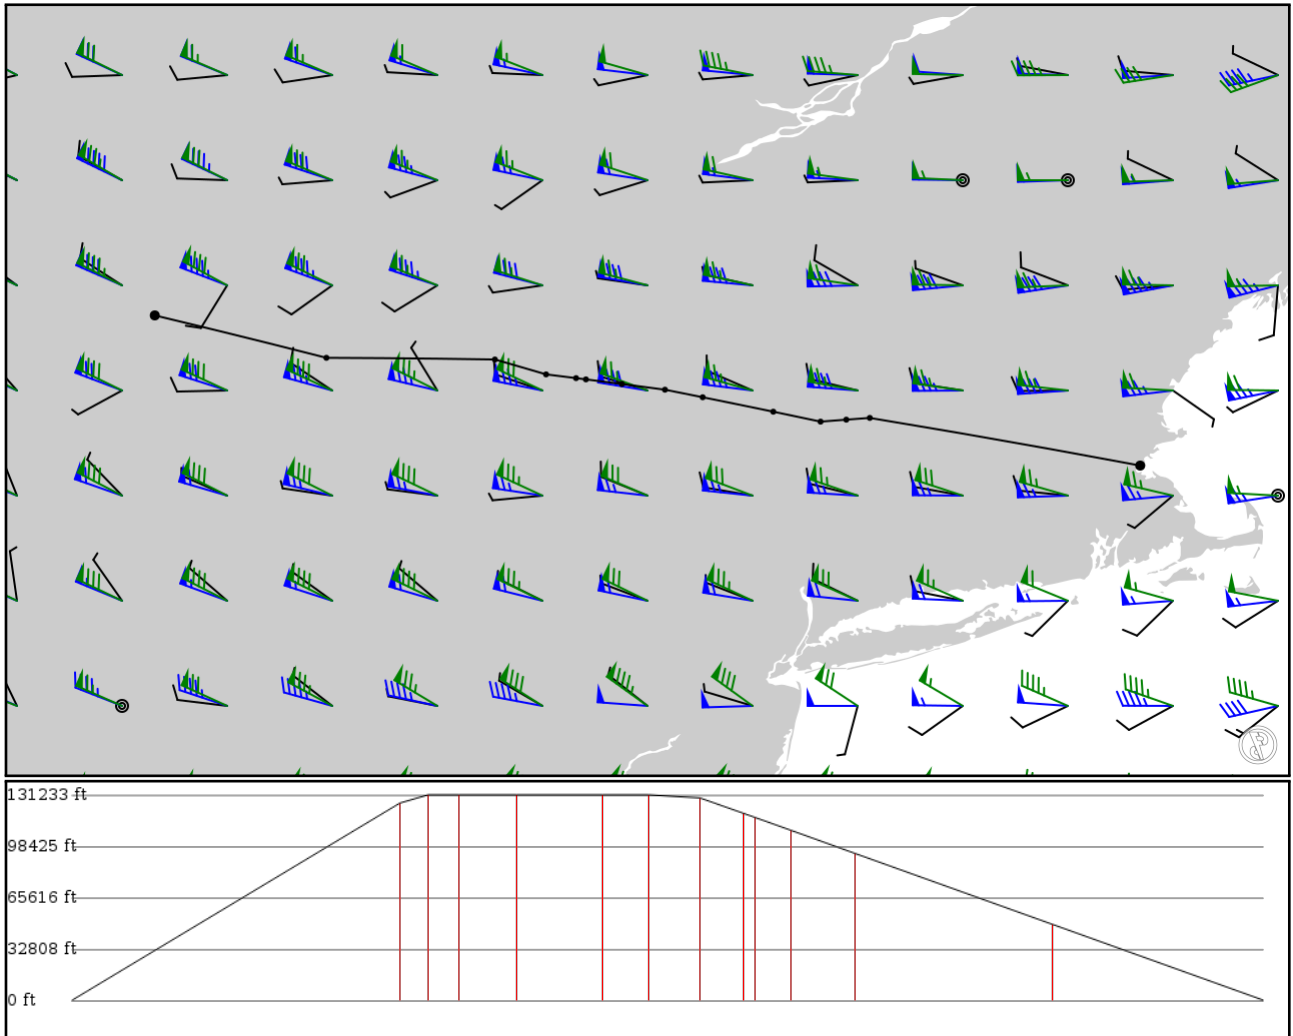

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 40000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KBOS	-	42.36300	0 ft	-	General Edward Lawrence Logan Intl	
APT	-	-71.00680	0 m			
GRAVE	-	42.77980	38,400 ft	107	-	
FIX	-	-73.37250	11,704 m			
WARUV	V14	42.76450	40,000 ft	9	-	
FIX	AWY-LO	-73.57820	12,192 m			
ALB	V14	42.74730	40,000 ft	9	ALBANY	
VOR	AWY-LO	-73.80320	12,192 m			
MARIA	V2	42.83410	40,000 ft	18	-	
FIX	AWY-LO	-74.21680	12,192 m			
NORSE	V2	42.96050	40,000 ft	28	-	
FIX	AWY-LO	-74.83440	12,192 m			
UCA	V2	43.02650	40,000 ft	15	UTICA	
VOR	AWY-LO	-75.16450	12,192 m			
VASTS	V2	43.07630	39,400 ft	16	-	
FIX	AWY-LO	-75.54160	12,009 m			
STODA	V2	43.11670	36,400 ft	13	-	
FIX	AWY-LO	-75.85590	11,095 m			
FAYET	V2	43.12770	35,600 ft	3	-	
FIX	AWY-LO	-75.94210	10,851 m			
SYR	V2	43.16050	33,100 ft	11	SYRACUSE	
VOR	AWY-LO	-76.20460	10,089 m			
GOATR	Q812	43.29060	28,600 ft	21	-	
FIX	AWY-HI	-76.65220	8,717 m			
AHPAH	Q812	43.30530	14,800 ft	64	-	
FIX	AWY-HI	-78.12640	4,511 m			
CYYZ	-	43.67610	0 ft	69	Toronto Pearson Intl	
APT	-	-79.62770	0 m			

KBOS

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 6

Elevation: 19 ft / 6 m
Location: 42.363000 -71.006800
Magnetic Var: 14.287 W

METAR

KBOS 070354Z 24004KT 10SM FEW065 BKN250 19/14 A2980 RMK A02 SLP091 T01940139

TAF

TAF KBOS 062321Z 0700/0806 27005KT P6SM SCT040 FM070600 VRB03KT 3SM BR SCT003 TEMPO 0707/0710 2SM BR OVC003 FM0710

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 121.65 MHz - CLEARANCE DELIVERY	GND - 121.75 MHz - BOSTON GROUND
GND - 121.90 MHz - BOSTON GROUND	TWR - 128.80 MHz - BOSTON TOWER
TWR - 124.72 MHz - BOSTON TOWER	TWR - 132.22 MHz - BOSTON TOWER
APP - 118.25 MHz - BOSTON APPROACH	APP - 120.60 MHz - BOSTON APPROACH
APP - 127.20 MHz - BOSTON APPROACH	DEP - 133.00 MHz - BOSTON DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	148 ft	10,092 ft	135.27	ASPHALT	883 ft	197 ft
	45 m	3,076 m	149.56		269 m	60 m
33L	148 ft	10,092 ft	315.29	ASPHALT	0 ft	167 ft
	45 m	3,076 m	329.58		0 m	51 m
04R	148 ft	10,012 ft	19.69	ASPHALT	1,155 ft	420 ft
	45 m	3,052 m	33.97		352 m	128 m
22L	148 ft	10,012 ft	199.69	ASPHALT	1,201 ft	200 ft
	45 m	3,052 m	213.98		366 m	61 m
04L	148 ft	7,871 ft	19.66	ASPHALT	0 ft	1,250 ft
	45 m	2,399 m	33.94		0 m	381 m
22R	148 ft	7,871 ft	199.66	ASPHALT	820 ft	200 ft
	45 m	2,399 m	213.95		250 m	61 m
09	148 ft	7,008 ft	76.51	ASPHALT	0 ft	932 ft
	45 m	2,136 m	90.80		0 m	284 m
27	148 ft	7,008 ft	256.53	ASPHALT	0 ft	161 ft
	45 m	2,136 m	270.82		0 m	49 m
14	98 ft	5,005 ft	125.76	ASPHALT	0 ft	0 ft
	30 m	1,526 m	140.05		0 m	0 m
32	98 ft	5,005 ft	305.77	ASPHALT	0 ft	801 ft
	30 m	1,526 m	320.06		0 m	244 m
15L	98 ft	2,558 ft	135.31	ASPHALT	0 ft	305 ft
	30 m	780 m	149.59		0 m	93 m
33R	98 ft	2,558 ft	315.31	ASPHALT	0 ft	59 ft
	30 m	780 m	329.60		0 m	18 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IBOS	110.30 MHz	18 nm	-	-	35 ft
				33 km	-		35 m
15R	DME	IMDC	110.70 MHz	18 nm	-	-	27 ft
				33 km	-		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	DME	ILQN	110.30 MHz	18 nm 33 km	- -	-	35 ft 35 m
27	DME	IDGU	111.30 MHz	18 nm 33 km	- -	-	28 ft 28 m
33L	DME	ILIP	110.70 MHz	18 nm 33 km	- -	-	19 ft 19 m
04R	LOC-ILS	IBOS	110.30 MHz	18 nm 33 km	19.68 33.97	-	20 ft 20 m
15R	LOC-ILS	IMDC	110.70 MHz	18 nm 33 km	135.28 149.57	-	20 ft 20 m
22L	LOC-ILS	ILQN	110.30 MHz	18 nm 33 km	199.68 213.97	-	20 ft 20 m
27	LOC-ILS	IDGU	111.30 MHz	18 nm 33 km	256.52 270.81	-	20 ft 20 m
33L	LOC-ILS	ILIP	110.70 MHz	18 nm 33 km	315.28 329.57	-	20 ft 20 m
04R	GS	IBOS	110.30 MHz	10 nm 19 km	19.68 33.97	3.00	20 ft 20 m
15R	GS	IMDC	110.70 MHz	10 nm 19 km	135.28 149.57	3.00	20 ft 20 m
22L	GS	ILQN	110.30 MHz	10 nm 19 km	199.68 213.97	3.00	20 ft 20 m
27	GS	IDGU	111.30 MHz	10 nm 19 km	256.52 270.81	3.00	20 ft 20 m
33L	GS	ILIP	110.70 MHz	10 nm 19 km	315.28 329.57	3.00	20 ft 20 m

CYYZ

Region: CANADA
Timezone: AMERICA/TORONTO
Runways: 5

Elevation: 564 ft / 172 m
Location: 43.676100 -79.627700
Magnetic Var: 10.261 W

METAR

CYYZ 070400Z 36009KT 15SM SKC 11/01 A2993 RMK SLP139

TAF

TAF CYYZ 070240Z 0703/0806 36010KT P6SM SKC BECMG 0713/0715 09012KT FM080100 08010KT P6SM -SHRA BKN050 RMK NXT FCS

Frequencies

TWR - 118.35 MHz - TORONTO TOWER	TWR - 118.70 MHz - TORONTO TOWER
GND - 119.10 MHz - TORONTO GROUND	GND - 121.65 MHz - TORONTO GROUND
GND - 121.90 MHz - TORONTO GROUND	REC - 120.82 MHz - ATIS
REC - 133.10 MHz - ATIS	CLD - 121.30 MHz - CLEARANCE DELIVERY
APP - 132.80 MHz - TORONTO APPROACH	APP - 124.47 MHz - TORONTO APPROACH
APP - 125.40 MHz - TORONTO APPROACH	APP - 123.27 MHz - LONDON RADIO
DEP - 127.57 MHz - TORONTO DEPARTURE	DEP - 128.80 MHz - TORONTO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	9,707 ft	46.43	ASPHALT	0 ft	131 ft
	60 m	2,959 m	56.69		0 m	40 m
24R	197 ft	9,707 ft	226.45	ASPHALT	194 ft	98 ft
	60 m	2,959 m	236.71		59 m	30 m
06R	197 ft	9,007 ft	46.43	ASPHALT	0 ft	95 ft
	60 m	2,745 m	56.69		0 m	29 m
24L	197 ft	9,007 ft	226.45	ASPHALT	0 ft	95 ft
	60 m	2,745 m	236.71		0 m	29 m
05	197 ft	11,128 ft	46.39	ASPHALT	141 ft	141 ft
	60 m	3,392 m	56.65		43 m	43 m
23	197 ft	11,128 ft	226.41	ASPHALT	492 ft	141 ft
	60 m	3,392 m	236.67		150 m	43 m
15L	197 ft	11,061 ft	136.64	ASPHALT	0 ft	92 ft
	60 m	3,372 m	146.90		0 m	28 m
33R	197 ft	11,061 ft	316.66	ASPHALT	0 ft	89 ft
	60 m	3,372 m	326.92		0 m	27 m
15R	197 ft	9,097 ft	136.62	ASPHALT	597 ft	0 ft
	60 m	2,773 m	146.88		182 m	0 m
33L	197 ft	9,097 ft	316.64	ASPHALT	591 ft	0 ft
	60 m	2,773 m	326.90		180 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24L	DME	IIDP	111.95 MHz	18 nm	-	-	568 ft
				33 km	-		568 m
24R	DME	INV	109.30 MHz	18 nm	-	-	546 ft
				33 km	-		546 m
05	LOC-ILS	ITX	109.70 MHz	18 nm	46.40	-	564 ft
				33 km	56.66		564 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IJS	109.10 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
06R	LOC-ILS	ICV	111.95 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
15L	LOC-ILS	IRW	110.50 MHz	18 nm 33 km	136.65 146.91	-	564 ft 564 m
15R	LOC-ILS	ILP	110.95 MHz	18 nm 33 km	136.63 146.89	-	564 ft 564 m
23	LOC-ILS	IYZ	111.50 MHz	18 nm 33 km	226.40 236.66	-	564 ft 564 m
24L	LOC-ILS	IDP	111.95 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
24R	LOC-ILS	INV	109.30 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
33L	LOC-ILS	ITO	110.95 MHz	18 nm 33 km	316.63 326.89	-	564 ft 564 m
33R	LOC-ILS	ILE	110.30 MHz	18 nm 33 km	316.65 326.91	-	564 ft 564 m
05	GS	ITX	109.70 MHz	10 nm 19 km	46.40 56.66	3.00	564 ft 564 m
06L	GS	IJS	109.10 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
06R	GS	ICV	111.95 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
15L	GS	IRW	110.50 MHz	10 nm 19 km	136.65 146.91	3.00	564 ft 564 m
15R	GS	ILP	110.95 MHz	10 nm 19 km	136.63 146.89	3.00	564 ft 564 m
23	GS	IYZ	111.50 MHz	10 nm 19 km	226.40 236.66	3.00	564 ft 564 m
24L	GS	IIDP	111.95 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
24R	GS	INV	109.30 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
33L	GS	ITO	110.95 MHz	10 nm 19 km	316.63 326.89	3.00	564 ft 564 m
33R	GS	ILE	110.30 MHz	10 nm 19 km	316.65 326.91	3.00	564 ft 564 m