

KMDW

Chicago Midway Intl


KSDF

Louisville Intl Standiford Fld

2024/05/04 1734Z

KMDW BASMN KSDF

235.60 nm / 436.33 km

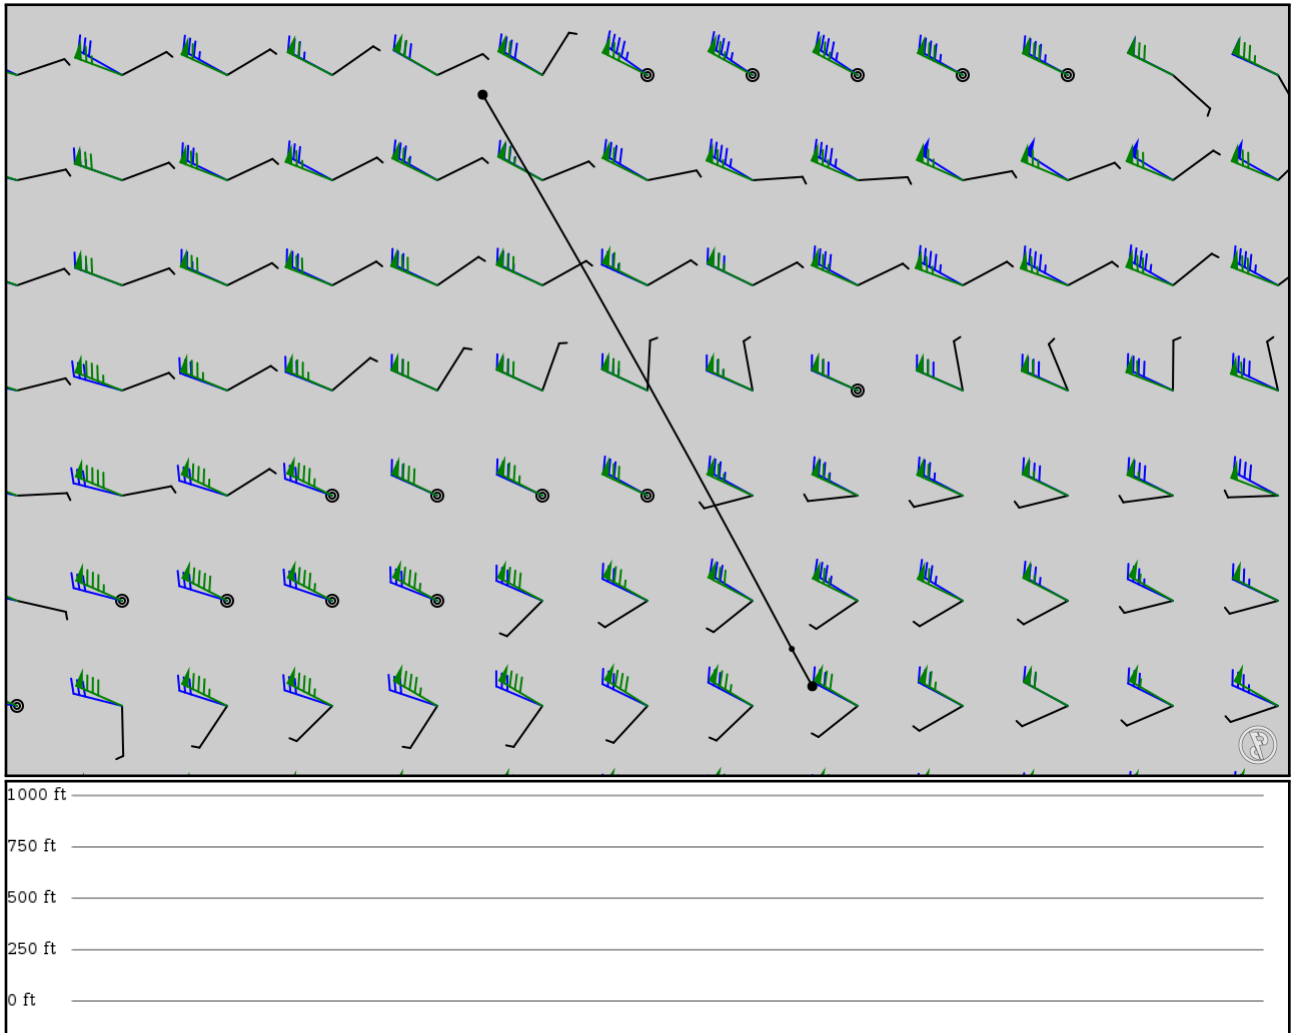

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMDW	-	41.78807	0 ft	-	-
APT	-	-87.75880	0 m		
BASMN	-	38.40805	0 ft	220	-
FIX	-	-85.87266	0 m		
KSDF	-	38.18023	0 ft	14	-
APT	-	-85.74735	0 m		

KMDW

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 5

Elevation: 620 ft / 189 m
Location: 41.785900 -87.752500
Magnetic Var: 4.203 W

METAR

KMDW 041653Z 20009G17KT 10SM SCT041 BKN250 25/14 A2993 RMK A02 SLP131 T02500139

TAF

KMDW 041453Z 0415/0518 15008KT P6SM SCT300 FM041800 20011KT P6SM FEW045 BKN250 FM050000 25008KT P6SM -SHRA SCT015

Frequencies

REC - 132.75 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 124.62 MHz - CLEARANCE DELIVERY	GND - 121.65 MHz - MIDWAY GROUND
TWR - 135.20 MHz - MIDWAY TOWER	DEP - 128.20 MHz - CHICAGO DEPARTURE
APP - 128.20 MHz - CHICAGO APPROACH	APP - 126.05 MHz - CHICAGO APPROACH
DEP - 126.05 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13L	150 ft	5,138 ft	133.63	ASPHALT	751 ft	0 ft
	46 m	1,566 m	137.84		229 m	0 m
31R	150 ft	5,138 ft	313.64	ASPHALT	0 ft	0 ft
	46 m	1,566 m	317.85		0 m	0 m
13C	150 ft	6,525 ft	133.65	ASPHALT	466 ft	0 ft
	46 m	1,989 m	137.85		142 m	0 m
31C	150 ft	6,525 ft	313.66	ASPHALT	699 ft	0 ft
	46 m	1,989 m	317.86		213 m	0 m
13R	60 ft	3,858 ft	133.66	ASPHALT	0 ft	331 ft
	18 m	1,176 m	137.87		0 m	101 m
31L	60 ft	3,858 ft	313.67	ASPHALT	0 ft	95 ft
	18 m	1,176 m	317.87		0 m	29 m
04L	150 ft	5,509 ft	43.35	ASPHALT	761 ft	0 ft
	46 m	1,679 m	47.55		232 m	0 m
22R	150 ft	5,509 ft	223.36	ASPHALT	879 ft	0 ft
	46 m	1,679 m	227.56		268 m	0 m
04R	150 ft	6,443 ft	43.36	ASPHALT	518 ft	0 ft
	46 m	1,964 m	47.56		158 m	0 m
22L	150 ft	6,443 ft	223.37	ASPHALT	633 ft	0 ft
	46 m	1,964 m	227.57		193 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13C	DME	IMDW	109.90 MHz	18 nm	-	-	620 ft
				33 km	-		620 m
31C	DME	IMXT	109.90 MHz	18 nm	-	-	620 ft
				33 km	-		620 m
04R	LOC-ILS	IHKH	111.50 MHz	18 nm	43.37	-	620 ft
				33 km	47.57		620 m
13C	LOC-ILS	IMDW	109.90 MHz	18 nm	133.66	-	620 ft
				33 km	137.86		620 m
31C	LOC-ILS	IMXT	109.90 MHz	18 nm	313.66	-	620 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	317.86		620 m
04R	GS	IHKH	111.50 MHz	10 nm	43.37	3.00	620 ft
				19 km	47.57		620 m
13C	GS	IMDW	109.90 MHz	10 nm	133.66	3.00	620 ft
				19 km	137.86		620 m
31C	GS	IMXT	109.90 MHz	10 nm	313.66	3.00	620 ft
				19 km	317.86		620 m

KSDF

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 500 ft / 152 m
Location: 38.174600 -85.735600
Magnetic Var: 5.245 W

METAR

KSDF 041656Z 23008KT 10SM SCT030 BKN060 BKN250 25/17 A2997 RMK A02 SLP142 T02500172

TAF

TAF AMD KSDF 041350Z 0414/0518 22004KT P6SM FEW007 SCT015 BKN025 TEMPO 0414/0415 SCT007 BKN015 FM041600 23008KT P

Frequencies

COM - 122.95 MHz - LOUISVILLE UNICOM
TWR - 124.20 MHz - LOUISVILLE TOWER
APP - 134.15 MHz - LOUISVILLE APPROACH
CLD - 126.10 MHz - CLEARANCE DELIVERY

GND - 121.70 MHz - LOUISVILLE GROUND
APP - 132.07 MHz - LOUISVILLE APPROACH
DEP - 132.07 MHz - LOUISVILLE DEPARTURE
REC - 118.72 MHz - D-ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11	151 ft	7,238 ft	111.20	CONCRETE	0 ft	246 ft
	46 m	2,206 m	116.45		0 m	75 m
29	151 ft	7,238 ft	291.21	CONCRETE	0 ft	0 ft
	46 m	2,206 m	296.46		0 m	0 m
17L	150 ft	8,599 ft	164.98	CONCRETE	331 ft	518 ft
	46 m	2,621 m	170.22		101 m	158 m
35R	150 ft	8,599 ft	344.98	CONCRETE	453 ft	397 ft
	46 m	2,621 m	350.23		138 m	121 m
17R	150 ft	11,913 ft	165.46	CONCRETE	850 ft	400 ft
	46 m	3,631 m	170.70		259 m	122 m
35L	150 ft	11,913 ft	345.46	CONCRETE	1,043 ft	397 ft
	46 m	3,631 m	350.71		318 m	121 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	IPKI	111.95 MHz	18 nm	-	-	501 ft
				33 km	-		501 m
17R	DME	ISNU	110.30 MHz	18 nm	-	-	501 ft
				33 km	-		501 m
35L	DME	IRLI	109.35 MHz	18 nm	-	-	501 ft
				33 km	-		501 m
35R	DME	IJJM	110.55 MHz	18 nm	-	-	501 ft
				33 km	-		501 m
17L	LOC-ILS	IPKI	111.95 MHz	18 nm	164.98	-	500 ft
				33 km	170.23		500 m
17R	LOC-ILS	ISNU	110.30 MHz	18 nm	165.46	-	500 ft
				33 km	170.71		500 m
35L	LOC-ILS	IRLI	109.35 MHz	18 nm	345.46	-	500 ft
				33 km	350.71		500 m
35R	LOC-ILS	IJJM	110.55 MHz	18 nm	344.98	-	500 ft
				33 km	350.23		500 m
29	LOC-LOC	ILKS	109.10 MHz	18 nm	291.21	-	500 ft
				33 km	296.46		500 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	GS	IPKI	111.95 MHz	10 nm	164.98	3.00	500 ft
				19 km	170.23		500 m
17R	GS	ISNU	110.30 MHz	10 nm	165.46	3.00	500 ft
				19 km	170.71		500 m
35L	GS	IRLI	109.35 MHz	10 nm	345.46	3.00	500 ft
				19 km	350.71		500 m
35R	GS	IJJM	110.55 MHz	10 nm	344.98	3.00	500 ft
				19 km	350.23		500 m