

# EKAH

Aarhus


# EKYT

Aalborg

2024/06/07 0031Z

EKAH EKYT

53.71 nm / 99.47 km

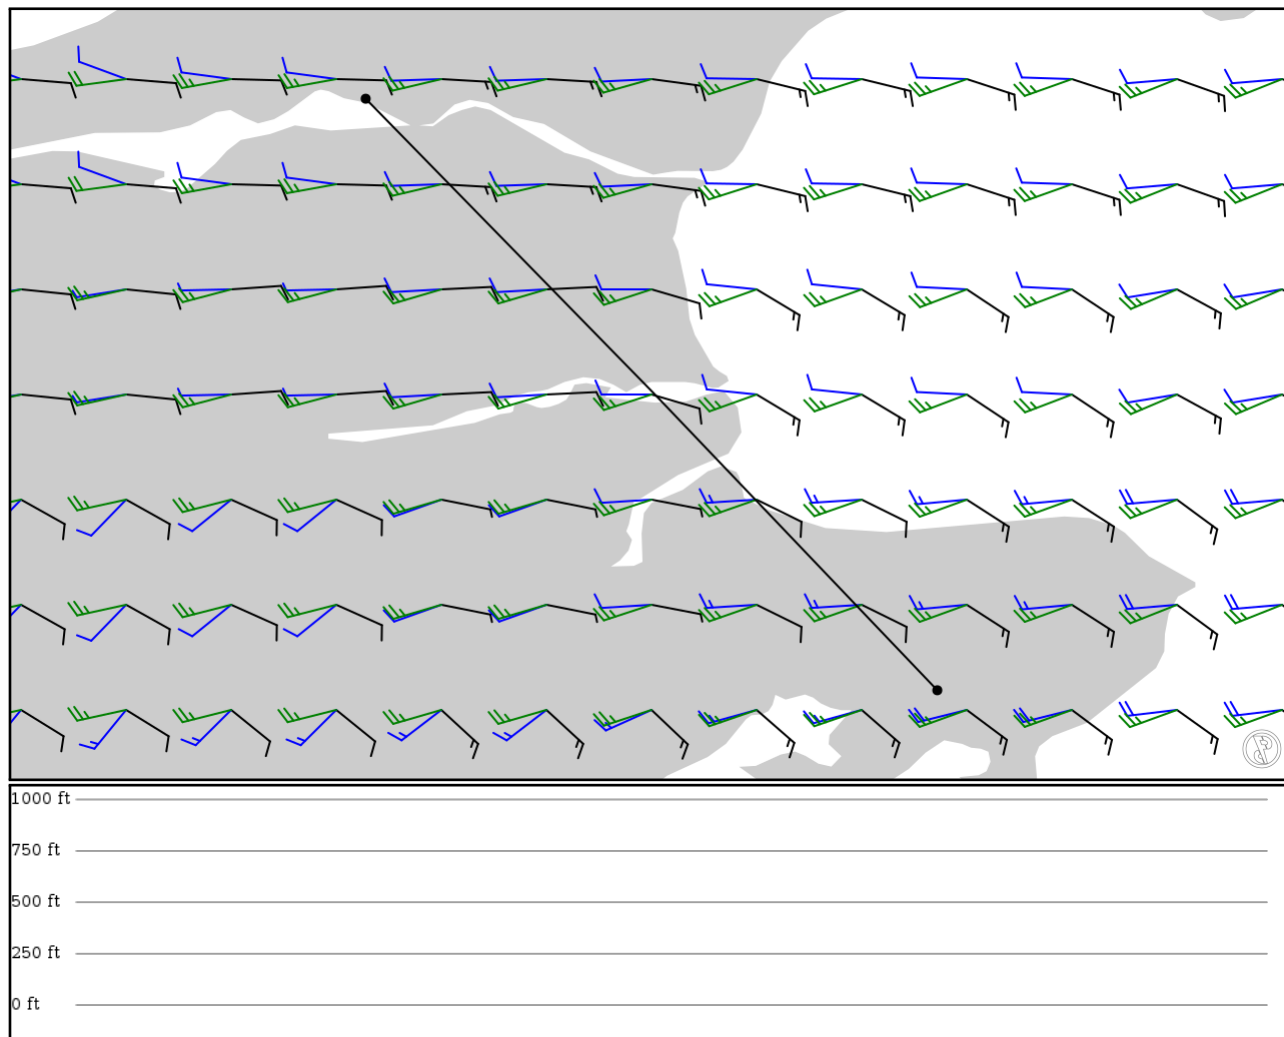

## Notes

Basic altitude profile:

- Ascent Rate: 500ft/min
- Ascent Speed: 70kts
- Cruise Altitude: 5000ft
- Cruise Speed: 105kts
- Descent Rate: 500ft/min
- Descent Speed: 70kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: no
- Use high airways: no



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EKAH	-	56.30430	0 ft	-	Aarhus
APT	-	10.61940	0 m		
EKYT	-	57.09420	0 ft	53	Aalborg
APT	-	9.85574	0 m		

## EKAH

Region: DENMARK / FAROE ISLANDS  
Timezone: EUROPE/COPENHAGEN  
Runways: 2

Elevation: 82 ft / 25 m  
Location: 56.304300 10.619400  
Magnetic Var: 4.036 E

## METAR

EKAH 070020Z AUTO 00000KT 8000 NCD 07/05 Q1015

## TAF

TAF EKAH 062302Z 0700/0724 23012KT 9999 SCT030 TEMPO 0700/0710 SCT030TCU TEMPO 0710/0720 SHRA SCT030CB PROB40 TEM

## Frequencies

TWR - 118.52 MHz - AARHUS TOWER

APP - 119.27 MHz - AARHUS APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	75 ft	9,081 ft	100.30	ASPHALT	0 ft	0 ft
	23 m	2,768 m	96.26		0 m	0 m
28R	75 ft	9,081 ft	280.34	ASPHALT	0 ft	0 ft
	23 m	2,768 m	276.30		0 m	0 m
10R	148 ft	8,837 ft	100.29	ASPHALT	0 ft	938 ft
	45 m	2,693 m	96.26		0 m	286 m
28L	148 ft	8,837 ft	280.33	ASPHALT	0 ft	738 ft
	45 m	2,693 m	276.29		0 m	225 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	DME	TR	111.10 MHz	18 nm	-	-	79 ft
				33 km	-		79 m
10R	LOC-ILS	AAR	111.90 MHz	18 nm	100.33	-	82 ft
				33 km	96.29		82 m
28L	LOC-ILS	TR	111.10 MHz	18 nm	280.29	-	82 ft
				33 km	276.25		82 m
10R	GS	AAR	111.90 MHz	10 nm	100.62	2.75	82 ft
				19 km	96.58		82 m
28L	GS	TR	111.10 MHz	10 nm	280.62	2.75	82 ft
				19 km	276.58		82 m

## EKYT

Region: DENMARK / FAROE ISLANDS  
Timezone: EUROPE/COPENHAGEN  
Runways: 2

Elevation: 9 ft / 3 m  
Location: 57.094200 9.855740  
Magnetic Var: 3.804 E

## METAR

EKYT 070020Z AUTO 21008KT 9999 NCD 08/06 Q1014

## TAF

TAF EKYT 062300Z 0700/0724 20008KT 9999 SCT030 TEMPO 0700/0711 FEW030CB TEMPO 0711/0720 SHRA SCT020CB PROB40 TEMP

## Frequencies

APP - 123.97 MHz -  
TWR - 118.30 MHz -  
GND - 131.55 MHz -

APP - 120.70 MHz - ARR  
REC - 120.47 MHz - ATIS

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	8,674 ft	83.22	ASPHALT	0 ft	892 ft
	45 m	2,644 m	79.41		0 m	272 m
26R	148 ft	8,674 ft	263.25	ASPHALT	0 ft	728 ft
	45 m	2,644 m	259.45		0 m	222 m
08R	75 ft	8,344 ft	83.22	ASPHALT	0 ft	489 ft
	23 m	2,543 m	79.42		0 m	149 m
26L	75 ft	8,344 ft	263.26	ASPHALT	0 ft	489 ft
	23 m	2,543 m	259.45		0 m	149 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	AE	109.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
26R	DME	YT	109.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
08L	LOC-ILS	AE	109.90 MHz	18 nm	83.27	-	10 ft
				33 km	79.47		10 m
26R	LOC-ILS	YT	109.91 MHz	18 nm	263.19	-	10 ft
				33 km	259.39		10 m
08L	GS	AE	109.90 MHz	10 nm	83.44	2.75	10 ft
				19 km	79.64		10 m
26R	GS	YT	109.90 MHz	10 nm	263.44	2.75	10 ft
				19 km	259.64		10 m