


RJFM
MIYAZAKI

RJ00
Osaka Intl

2024/05/19 0418Z

RJFM SUC **Y53** KARIN RJ00

267.21 nm / 494.88 km

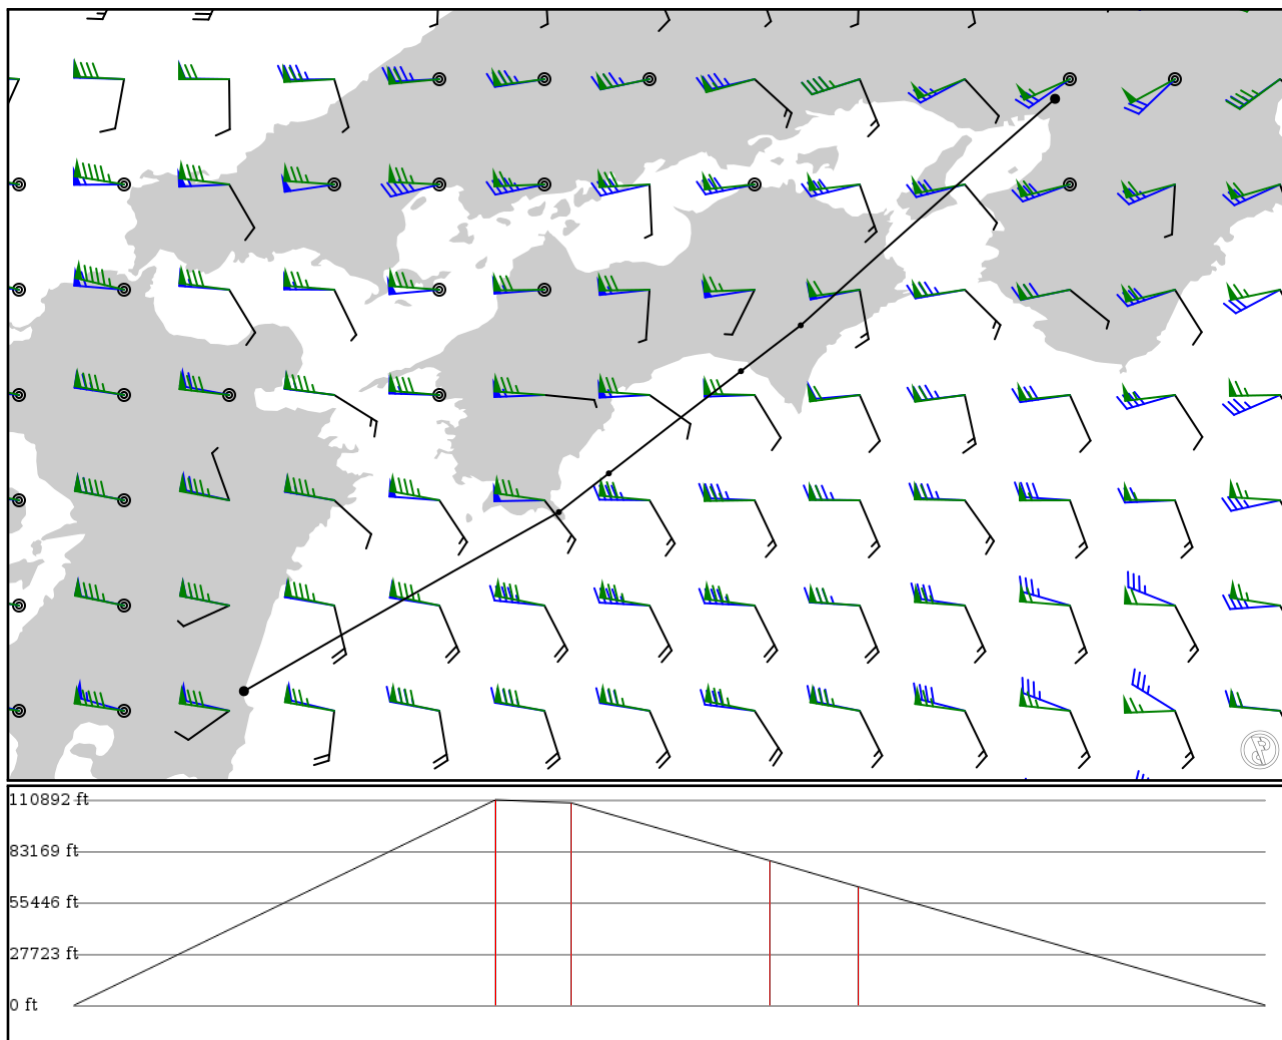

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJFM	-	31.87710	0 ft	-	MIYAZAKI
APT	-	131.44800	0 m		
SUC	-	32.75600	33,800 ft	94	SHIMIZU
VOR	-	132.99700	10,302 m		
STORK	Y53	32.94650	33,300 ft	16	-
FIX	AWY-HI	133.24300	10,150 m		
BRAVE	Y53	33.44850	23,800 ft	44	-
FIX	AWY-HI	133.89300	7,254 m		
KARIN	Y53	33.67350	19,500 ft	19	-
FIX	AWY-HI	134.18700	5,944 m		
RJ00	-	34.78560	0 ft	91	Osaka Intl
APT	-	135.43800	0 m		

RJFM

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 1

Elevation: 20 ft / 6 m
Location: 31.877100 131.448000
Magnetic Var: 7.433 W

METAR

RJFM 190400Z 03019KT 8000 -SHRA FEW005 SCT010 BKN013 19/17 Q1016

TAF

TAF RJFM 182309Z 1900/2006 03018KT 9999 FEW015 SCT020 BKN030 TEMPO 1900/1903 3000 -SHRA BR FEW005 BKN008 BKN015 BE

Frequencies

REC - 126.80 MHz - ATIS	GND - 123.60 MHz -
GND - 121.90 MHz -	TWR - 126.20 MHz -
TWR - 118.30 MHz -	APP - 120.90 MHz -
APP - 121.40 MHz -	DEP - 120.10 MHz -
DEP - 121.40 MHz -	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	148 ft	8,210 ft	85.16	ASPHALT	0 ft	184 ft
	45 m	2,502 m	92.60		0 m	56 m
27	148 ft	8,210 ft	265.18	ASPHALT	0 ft	177 ft
	45 m	2,502 m	272.61		0 m	54 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
27	DME	IMZ	108.90 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
27	LOC-ILS	IMZ	108.90 MHz	18 nm	265.16	-	54 ft
				33 km	272.60		54 m
27	GS	IMZ	108.90 MHz	10 nm	265.34	3.00	54 ft
				19 km	272.77		54 m

RJ00

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 39 ft / 12 m
Location: 34.785600 135.438000
Magnetic Var: 8.112 W

METAR

RJ00 190400Z VRB02KT 9999 -RA FEW008 SCT050 BKN080 17/15 Q1019 RMK 1ST008 3SC050 5AC080 A3009

TAF

TAF RJ00 182310Z 1900/2006 06005KT 9999 -RA FEW020 BKN045 TEMPO 1912/1918 3000 SHRA BR FEW005 BKN008 BKN015 BECMG

Frequencies

CLD - 118.80 MHz - OSAKA DELIVERY	GND - 121.70 MHz - OSAKA GROUND
TWR - 118.10 MHz - OSAKA TOWER	DEP - 119.50 MHz - KANSAI DEPARTURE
APP - 120.45 MHz - KANSAI APPROACH	REC - 128.60 MHz - OSAKA ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14R	200 ft	9,846 ft	135.14	ASPHALT	128 ft	213 ft
	61 m	3,001 m	143.25		39 m	65 m
32L	200 ft	9,846 ft	315.15	ASPHALT	125 ft	249 ft
	61 m	3,001 m	323.26		38 m	76 m
14L	143 ft	5,995 ft	135.18	ASPHALT	128 ft	679 ft
	44 m	1,827 m	143.29		39 m	207 m
32R	143 ft	5,995 ft	315.18	ASPHALT	118 ft	571 ft
	44 m	1,827 m	323.29		36 m	174 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
32L	LOC-ILS	ISK	110.10 MHz	18 nm	315.13	-	50 ft
				33 km	323.24		50 m
32L	GS	ISK	110.10 MHz	10 nm	315.28	3.00	54 ft
				19 km	323.39		54 m