

KSEA

Seattle Tacoma Intl


CYYZ

Toronto Pearson Intl

2024/06/04 0243Z

KSEA OZALI V120 EPH J70 MLP Q142 KEETA Q144 LEWIT Q140 PEPLA CYYZ

1796.99 nm / 3328.03 km

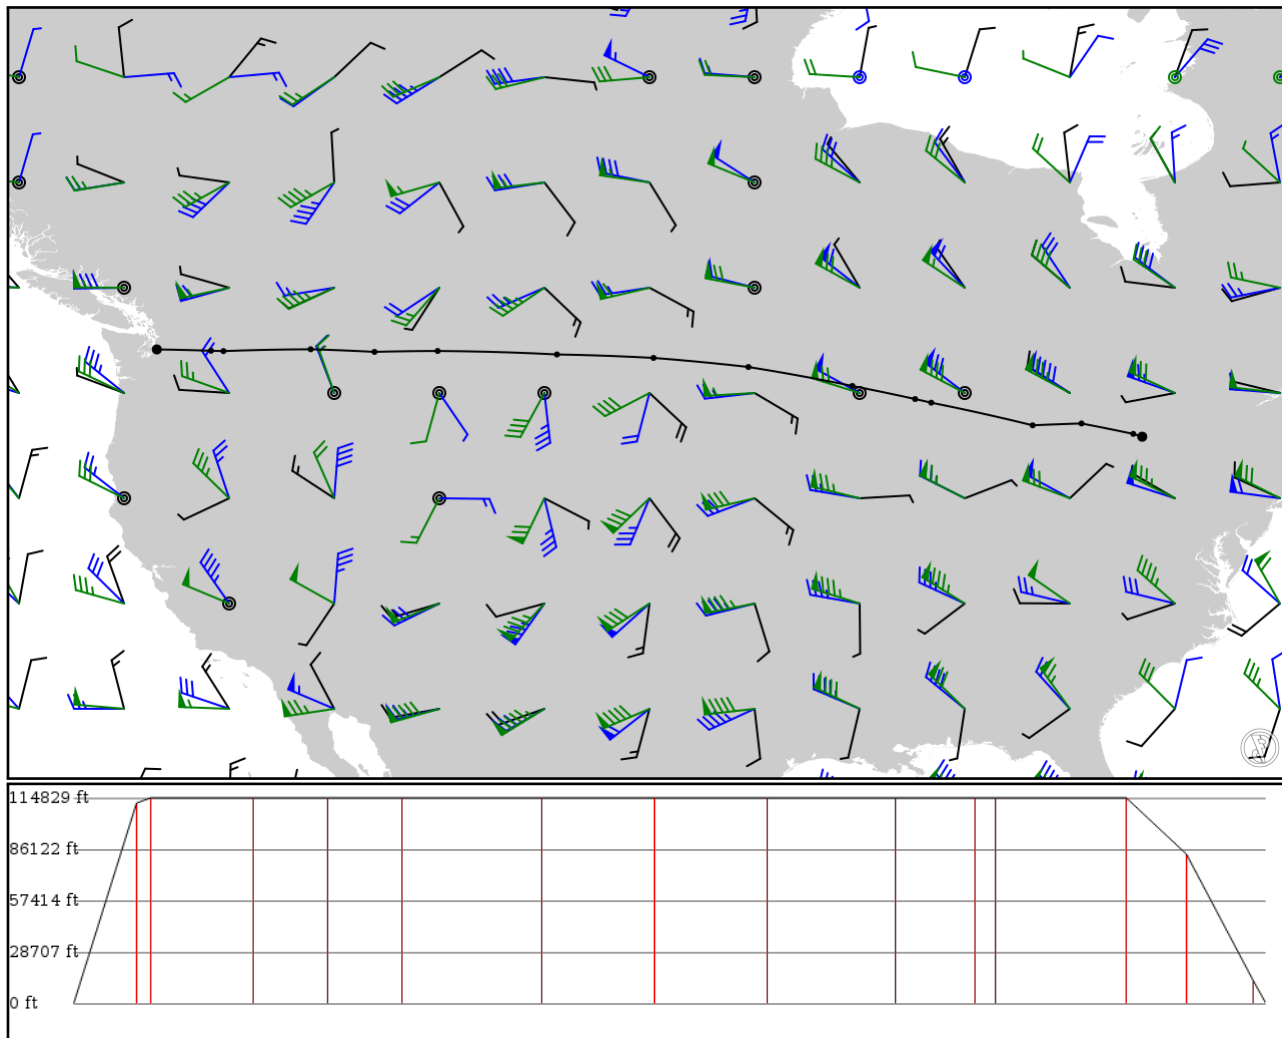

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSEA	-	47.45020	0 ft	-	Seattle Tacoma Intl
APT	-	-122.31200	0 m		
OZALI	-	47.39340	34,100 ft	95	-
FIX	-	-119.96300	10,394 m		
EPH	V120	47.37790	35,000 ft	21	EPHRATA
VOR	AWY-LO	-119.42400	10,668 m		
MLP	J70	47.45690	35,000 ft	153	MULLAN PASS
VOR	AWY-HI	-115.64600	10,668 m		
KEETA	Q142	47.34420	35,000 ft	112	-
FIX	AWY-HI	-112.88100	10,668 m		
LEWIT	Q144	47.38340	35,000 ft	111	-
FIX	AWY-HI	-110.14600	10,668 m		
SAYOR	Q140	47.23290	35,000 ft	210	-
FIX	AWY-HI	-104.97800	10,668 m		
WILTN	Q140	47.08280	35,000 ft	171	-
FIX	AWY-HI	-100.79600	10,668 m		
TTAIL	Q140	46.69110	35,000 ft	170	-
FIX	AWY-HI	-96.68580	10,668 m		
CESNA	Q140	45.87060	35,000 ft	193	-
FIX	AWY-HI	-92.18310	10,668 m		
WISCN	Q140	45.30540	35,000 ft	119	-
FIX	AWY-HI	-89.46500	10,668 m		
EEGEE	Q140	45.14810	35,000 ft	31	-
FIX	AWY-HI	-88.76610	10,668 m		
DAYYY	Q140	44.16940	35,000 ft	196	-
FIX	AWY-HI	-84.37310	10,668 m		
RUBKI	Q140	44.24890	25,400 ft	91	-
FIX	AWY-HI	-82.25720	7,742 m		
PEPLA	Q140	43.79750	3,900 ft	100	-
FIX	AWY-HI	-80.01490	1,189 m		
CYYZ	-	43.67610	0 ft	18	Toronto Pearson Intl
APT	-	-79.62770	0 m		

KSEA

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 432 ft / 132 m
Location: 47.450200 -122.312000
Magnetic Var: 14.765 E

METAR

KSEA 040153Z 22012KT 10SM FEW025 SCT046 BKN120 12/07 A2994 RMK A02 SLP144 T01170072

TAF

KSEA 032322Z 0400/0506 22015G25KT P6SM -SHRA SCT025 OVC040 FM040500 19012G20KT P6SM -SHRA OVC025 FM040900 18022G3

Frequencies

REC - 118.00 MHz - SEATTLE ATIS
GND - 121.70 MHz - SEATTLE GROUND
TWR - 120.95 MHz - SEATTLE TOWER
DEP - 120.10 MHz - SEATTLE DEPARTURE
CLD - 128.00 MHz - SEATTLE CLEARANCE
TWR - 119.90 MHz - SEATTLE TOWER
APP - 133.65 MHz - SEATTLE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	11,904 ft	180.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	165.58		0 m	122 m
34R	151 ft	11,904 ft	0.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	345.58		0 m	122 m
16C	151 ft	9,428 ft	180.34	CONCRETE	0 ft	400 ft
	46 m	2,874 m	165.58		0 m	122 m
34C	151 ft	9,428 ft	0.34	CONCRETE	0 ft	397 ft
	46 m	2,874 m	345.58		0 m	121 m
16R	151 ft	8,502 ft	180.34	CONCRETE	0 ft	200 ft
	46 m	2,591 m	165.57		0 m	61 m
34L	151 ft	8,502 ft	0.34	CONCRETE	0 ft	197 ft
	46 m	2,591 m	345.57		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	ISZI	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
16L	DME	ISNQ	110.30 MHz	18 nm	-	-	369 ft
				33 km	-		369 m
16R	DME	ICJL	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34C	DME	ITUC	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
34L	DME	IB EJ	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34R	DME	ISEA	110.30 MHz	18 nm	-	-	469 ft
				33 km	-		469 m
16C	LOC-ILS	ISZI	111.70 MHz	18 nm	180.34	-	355 ft
				33 km	165.57		355 m
16L	LOC-ILS	ISNQ	110.30 MHz	18 nm	180.34	-	338 ft
				33 km	165.58		338 m
16R	LOC-ILS	ICJL	110.75 MHz	18 nm	180.34	-	410 ft
				33 km	165.57		410 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34C	LOC-ILS	ITUC	111.70 MHz	18 nm	0.34	-	422 ft
				33 km	345.57		422 m
34L	LOC-ILS	IBEJ	110.75 MHz	18 nm	0.34	-	433 ft
				33 km	345.57		433 m
34R	LOC-ILS	ISEA	110.30 MHz	18 nm	0.34	-	428 ft
				33 km	345.58		428 m
16C	GS	ISZI	111.70 MHz	10 nm	180.67	3.00	418 ft
				19 km	165.91		418 m
16L	GS	ISNQ	110.30 MHz	10 nm	180.69	3.00	425 ft
				19 km	165.92		425 m
16R	GS	ICJL	110.75 MHz	10 nm	180.67	3.00	410 ft
				19 km	165.91		410 m
34C	GS	ITUC	111.70 MHz	10 nm	0.67	3.00	367 ft
				19 km	345.91		367 m
34L	GS	IBEJ	110.75 MHz	10 nm	0.67	3.00	360 ft
				19 km	345.91		360 m
34R	GS	ISEA	110.30 MHz	10 nm	0.69	2.75	355 ft
				19 km	345.92		355 m

CYYZ

Region: CANADA
Timezone: AMERICA/TORONTO
Runways: 5

Elevation: 564 ft / 172 m
Location: 43.676100 -79.627700
Magnetic Var: 10.260 W

METAR

CYYZ 040200Z 16005KT 15SM FEW250 17/16 A2995 RMK CI2 SLP145 DENSITY ALT 1000FT

TAF

TAF CYYZ 032340Z 0400/0506 14007KT P6SM FEW030 FEW160 SCT250 FM040300 VRB03KT 6SM BR SCT004 PROB30 0403/0408 1SM B

Frequencies

TWR - 118.35 MHz - TORONTO TOWER	TWR - 118.70 MHz - TORONTO TOWER
GND - 119.10 MHz - TORONTO GROUND	GND - 121.65 MHz - TORONTO GROUND
GND - 121.90 MHz - TORONTO GROUND	REC - 120.82 MHz - ATIS
REC - 133.10 MHz - ATIS	CLD - 121.30 MHz - CLEARANCE DELIVERY
APP - 132.80 MHz - TORONTO APPROACH	APP - 124.47 MHz - TORONTO APPROACH
APP - 125.40 MHz - TORONTO APPROACH	APP - 123.27 MHz - LONDON RADIO
DEP - 127.57 MHz - TORONTO DEPARTURE	DEP - 128.80 MHz - TORONTO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	9,707 ft	46.43	ASPHALT	0 ft	131 ft
	60 m	2,959 m	56.69		0 m	40 m
24R	197 ft	9,707 ft	226.45	ASPHALT	194 ft	98 ft
	60 m	2,959 m	236.71		59 m	30 m
06R	197 ft	9,007 ft	46.43	ASPHALT	0 ft	95 ft
	60 m	2,745 m	56.69		0 m	29 m
24L	197 ft	9,007 ft	226.45	ASPHALT	0 ft	95 ft
	60 m	2,745 m	236.71		0 m	29 m
05	197 ft	11,128 ft	46.39	ASPHALT	141 ft	141 ft
	60 m	3,392 m	56.65		43 m	43 m
23	197 ft	11,128 ft	226.41	ASPHALT	492 ft	141 ft
	60 m	3,392 m	236.67		150 m	43 m
15L	197 ft	11,061 ft	136.64	ASPHALT	0 ft	92 ft
	60 m	3,372 m	146.90		0 m	28 m
33R	197 ft	11,061 ft	316.66	ASPHALT	0 ft	89 ft
	60 m	3,372 m	326.92		0 m	27 m
15R	197 ft	9,097 ft	136.62	ASPHALT	597 ft	0 ft
	60 m	2,773 m	146.88		182 m	0 m
33L	197 ft	9,097 ft	316.64	ASPHALT	591 ft	0 ft
	60 m	2,773 m	326.90		180 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24L	DME	IIDP	111.95 MHz	18 nm	-	-	568 ft
				33 km	-		568 m
24R	DME	INV	109.30 MHz	18 nm	-	-	546 ft
				33 km	-		546 m
05	LOC-ILS	ITX	109.70 MHz	18 nm	46.40	-	564 ft
				33 km	56.66		564 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IJS	109.10 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
06R	LOC-ILS	ICV	111.95 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
15L	LOC-ILS	IRW	110.50 MHz	18 nm 33 km	136.65 146.91	-	564 ft 564 m
15R	LOC-ILS	ILP	110.95 MHz	18 nm 33 km	136.63 146.89	-	564 ft 564 m
23	LOC-ILS	IYZ	111.50 MHz	18 nm 33 km	226.40 236.66	-	564 ft 564 m
24L	LOC-ILS	IDP	111.95 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
24R	LOC-ILS	INV	109.30 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
33L	LOC-ILS	ITO	110.95 MHz	18 nm 33 km	316.63 326.89	-	564 ft 564 m
33R	LOC-ILS	ILE	110.30 MHz	18 nm 33 km	316.65 326.91	-	564 ft 564 m
05	GS	ITX	109.70 MHz	10 nm 19 km	46.40 56.66	3.00	564 ft 564 m
06L	GS	IJS	109.10 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
06R	GS	ICV	111.95 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
15L	GS	IRW	110.50 MHz	10 nm 19 km	136.65 146.91	3.00	564 ft 564 m
15R	GS	ILP	110.95 MHz	10 nm 19 km	136.63 146.89	3.00	564 ft 564 m
23	GS	IYZ	111.50 MHz	10 nm 19 km	226.40 236.66	3.00	564 ft 564 m
24L	GS	IIDP	111.95 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
24R	GS	INV	109.30 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
33L	GS	ITO	110.95 MHz	10 nm 19 km	316.63 326.89	3.00	564 ft 564 m
33R	GS	ILE	110.30 MHz	10 nm 19 km	316.65 326.91	3.00	564 ft 564 m