

LPPT

Lisboa-Humberto Delgado Intl


EGSS

London Stansted

2024/05/18 2328Z

LPPT XAMAX A5 MANIK UP600 PRT A5 STG R1 KORUL UN866 QPR UM30 BERAD UN866 LORKU LELNA ORTAC L980
KATHY EGSS

902.04 nm / 1670.58 km

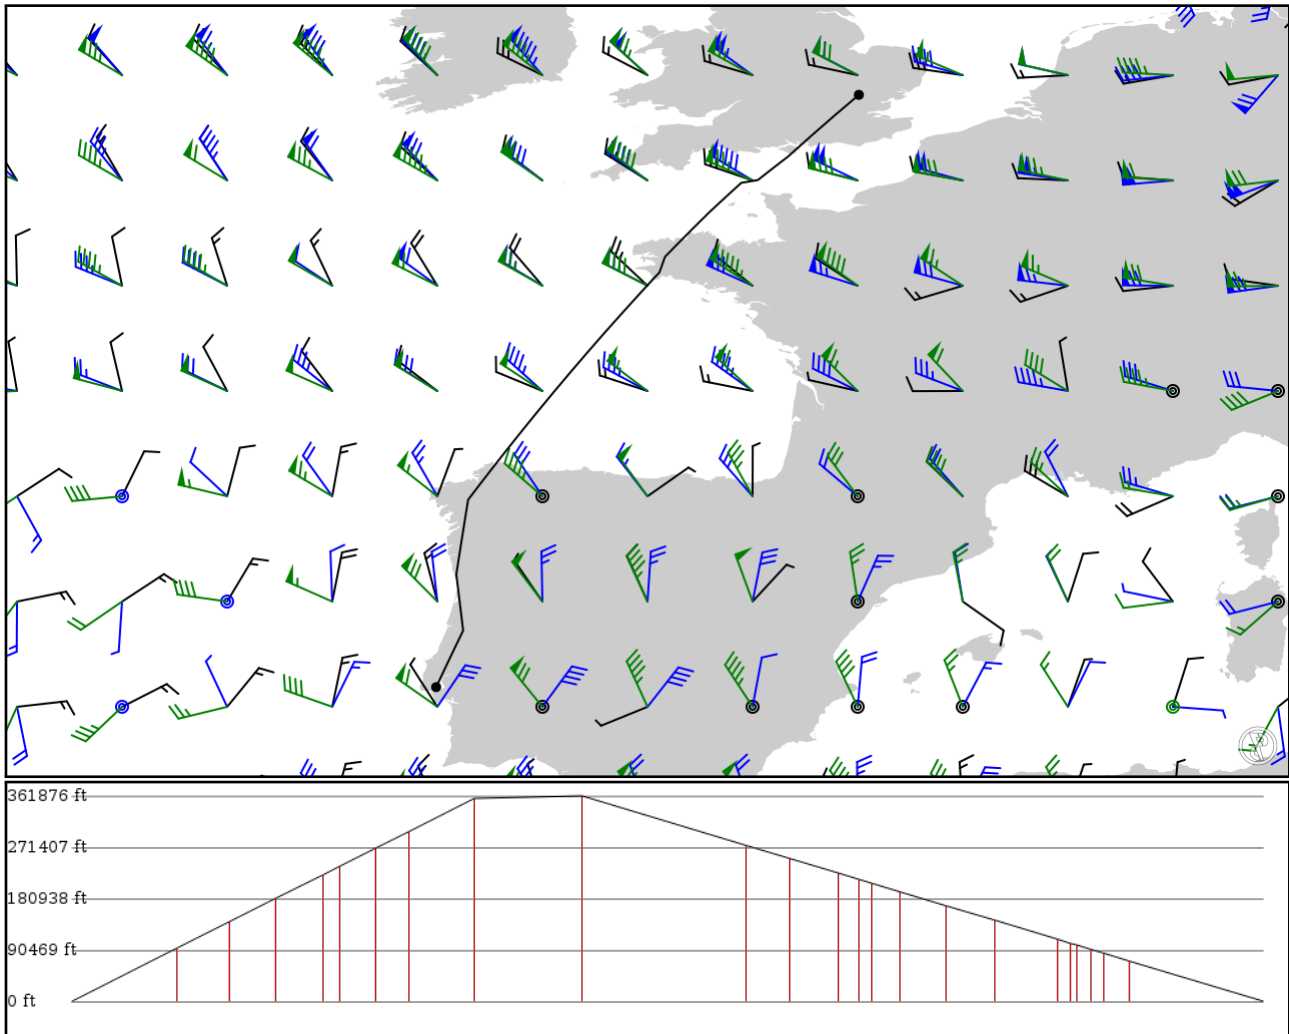

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 380000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LPPT	-	38.77880	0 ft	-	Lisboa-Humberto Delgado Intl
APT	-	-9.13519	0 m	-	
XAMAX	-	40.03110	28,600 ft	80	-
FIX	-	-8.53611	8,717 m	-	-
MANIK	A5	40.69190	42,800 ft	39	-
FIX	AWY-LO	-8.61611	13,045 m	-	-
PRT	UP600	41.27300	55,300 ft	35	PORTO
VOR	AWY-HI	-8.68783	16,855 m	-	
RELVA	A5	41.85280	67,900 ft	35	-
FIX	AWY-LO	-8.59750	20,696 m	-	-
TURON	A5	42.06790	72,500 ft	13	-
FIX	AWY-LO	-8.56342	22,098 m	-	-
ASDEB	A5	42.51590	82,200 ft	27	-
FIX	AWY-LO	-8.49189	25,055 m	-	-
STG	A5	42.92690	91,100 ft	24	SANTIAGO
VOR	AWY-LO	-8.42539	27,767 m	-	
KORAV	R1	43.65310	108,900 ft	50	-
FIX	AWY-LO	-7.86558	33,193 m	-	-
KORUL	R1	44.83520	110,300 ft	81	-
FIX	AWY-LO	-6.91972	33,619 m	-	-
KOLEK	UN866	46.61280	83,700 ft	124	-
FIX	AWY-HI	-5.40806	25,512 m	-	-
COQUE	UN866	47.07920	76,700 ft	32	-
FIX	AWY-HI	-4.99056	23,378 m	-	-
KEREB	UN866	47.59140	68,900 ft	36	-
FIX	AWY-HI	-4.52472	21,001 m	-	-
EBOMO	UN866	47.82110	65,500 ft	16	-
FIX	AWY-HI	-4.31256	19,964 m	-	-
QPR	UN866	47.95730	63,400 ft	9	QUIMPER PLUGUFFAN
VOR	AWY-HI	-4.18472	19,324 m	-	
BERAD	UM30	48.30190	58,800 ft	21	-
FIX	AWY-HI	-4.06167	17,922 m	-	-
TITUB	UN866	48.79250	51,300 ft	35	-
FIX	AWY-HI	-3.57861	15,636 m	-	-
GOBUR	UN866	49.29170	43,600 ft	35	-
FIX	AWY-HI	-3.07528	13,289 m	-	-
LORKU	UN866	49.93830	33,400 ft	47	-
FIX	AWY-HI	-2.37111	10,180 m	-	-
LELNA	-	49.98250	31,100 ft	10	-
FIX	-	-2.10639	9,479 m	-	-
ORTAC	-	49.99920	30,300 ft	4	-
FIX	-	-2.00500	9,235 m	-	-
VEXEN	L980	50.13940	27,900 ft	10	-
FIX	AWY-LO	-1.82611	8,504 m	-	-
DOMUT	L980	50.26190	25,900 ft	9	-
FIX	AWY-LO	-1.66917	7,894 m	-	-
KATHY	L980	50.52060	21,600 ft	20	-
FIX	AWY-LO	-1.33333	6,584 m	-	-
EGSS	-	51.88510	0 ft	100	London Stansted
APT	-	0.23499	0 m	-	

LPPT

Region: PORTUGAL
Timezone: EUROPE/LISBON
Runways: 2

Elevation: 374 ft / 114 m
Location: 38.778800 -9.135190
Magnetic Var: 1.566 W

METAR

LPPT 182300Z 31007KT 9999 FEW016 14/11 Q1015

TAF

TAF LPPT 181700Z 1818/1924 29013KT 9999 FEW030 TEMPO 1818/1821 SCT020 BKN040 BECMG 1821/1823 31007KT SCT015 BECMG

Frequencies

REC - 121.95 MHz - ATIS	REC - 124.15 MHz - ATIS
TWR - 118.10 MHz - LISBOA TOWER	TWR - 118.50 MHz - LISBOA TOWER
GND - 121.75 MHz - LISBOA GROUND	CLD - 118.95 MHz - CLEARANCE DELIVERY
APP - 119.10 MHz - LISBOA APPROACH	APP - 119.55 MHz - LISBOA APPROACH
APP - 125.35 MHz - LISBOA ARRIVAL	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03	148 ft	12,505 ft	22.65	ASPHALT	302 ft	0 ft
	45 m	3,812 m	24.21		92 m	0 m
21	148 ft	12,505 ft	202.66	ASPHALT	1,965 ft	0 ft
	45 m	3,812 m	204.22		599 m	0 m
17	148 ft	7,612 ft	168.14	ASPHALT	0 ft	0 ft
	45 m	2,320 m	169.70		0 m	0 m
35	148 ft	7,612 ft	348.14	ASPHALT	194 ft	299 ft
	45 m	2,320 m	349.71		59 m	91 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03	DME	ILI	109.10 MHz	18 nm	-	-	419 ft
				33 km	-		419 m
21	DME	ILB	109.50 MHz	18 nm	-	-	423 ft
				33 km	-		423 m
03	LOC-ILS	ILI	109.10 MHz	18 nm	22.66	-	374 ft
				33 km	24.23		374 m
21	LOC-ILS	ILB	109.50 MHz	18 nm	202.59	-	335 ft
				33 km	204.15		335 m
03	GS	ILI	109.10 MHz	10 nm	22.66	3.00	374 ft
				19 km	24.23		374 m
21	GS	ILB	109.50 MHz	10 nm	203.42	3.00	423 ft
				19 km	204.99		423 m

EGSS

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 348 ft / 106 m
Location: 51.885100 0.234989
Magnetic Var: 0.581 E

METAR

EGSS 182320Z AUTO 33003KT 9999 NCD 09/07 Q1014

TAF

TAF EGSS 181657Z 1818/1924 36007KT 9999 SCT018 PROB30 TEMPO 1818/1821 5000 SHRA BKN012CB BECMG 1822/1901 3000 BR B

Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.20		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.22		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.22		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.22		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.22		348 m