

KSFO

San Francisco Intl


KSEA

Seattle Tacoma Intl

2024/06/04 0122Z

KSFO MXW **V87** RBL **J65** SEA KSEA

593.82 nm / 1099.75 km

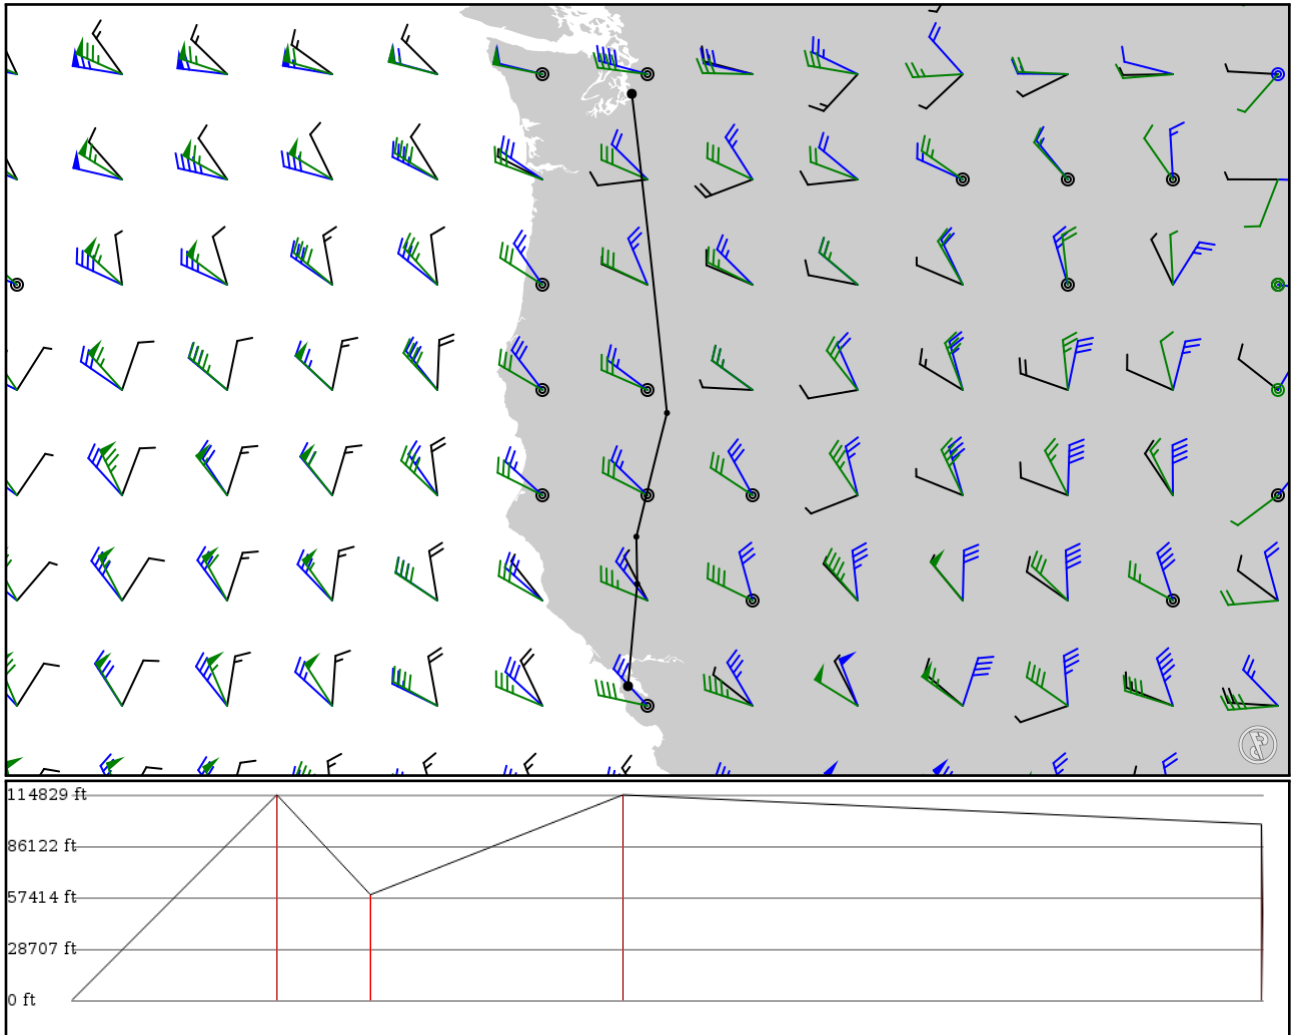

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSFO	-	37.61867	0 ft	-	San Francisco Intl
APT	-	-122.37501	0 m		
MXW	-	39.31758	35,000 ft	102	MAXWELL VORTAC
VOR	-	-122.22153	10,668 m		
RBL	V87	40.09891	18,000 ft	46	RED BLUFF VORTAC
DME	AWY-LO	-122.23635	5,486 m		
LMT	J65	42.15315	35,000 ft	125	KLAMATH FALLS VORTAC
DME	AWY-HI	-121.72752	10,668 m		
SEA	J65	47.43536	30,000 ft	318	SEATTLE VORTAC
VOR	AWY-HI	-122.30961	9,144 m		
KSEA	-	47.45019	0 ft	0	Seattle Tacoma Intl
APT	-	-122.31232	0 m		

KSFO

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 13 ft / 4 m
Location: 37.618500 -122.375000
Magnetic Var: 12.837 E

METAR

KSFO 040056Z 29017G26KT 2 1/2SM FEW003 BKN005 BKN007 14/12 A3000 RMK A02 PK WND 29027/0039 SFC VIS 8 SLP158 T01390

TAF

TAF AMD KSFO 040036Z 0401/0506 28015G22KT P6SM BKN007 BKN012 FM040600 29006KT P6SM SCT250 FM041800 30012KT P6SM S

Frequencies

REC - 113.70 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS
CLD - 118.20 MHz -
SAN FRANCISCO CLEARANCE DELIVERY
TWR - 120.50 MHz - SAN FRANCISCO TOWER
APP - 128.32 MHz - NORCAL APPROACH
APP - 133.95 MHz - NORCAL APPROACH
DEP - 135.10 MHz - NORCAL DEPARTURE

REC - 115.80 MHz - D-ATIS
COM - 122.95 MHz - UNICOM
GND - 121.80 MHz - SAN FRANCISCO GROUND
APP - 134.50 MHz - NORCAL APPROACH
APP - 128.57 MHz - NORCAL APPROACH
DEP - 120.90 MHz - NORCAL DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.06		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.06		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.08		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.88		0 m	136 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m

KSEA

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 432 ft / 132 m
Location: 47.450200 -122.312000
Magnetic Var: 14.765 E

METAR

KSEA 040053Z 20013G20KT 10SM FEW025 SCT045 BKN140 12/07 A2992 RMK A02 PK WND 23029/2354 SLP139 T01170067

TAF

KSEA 032322Z 0400/0506 22015G25KT P6SM -SHRA SCT025 OVC040 FM040500 19012G20KT P6SM -SHRA OVC025 FM040900 18022G30

Frequencies

REC - 118.00 MHz - SEATTLE ATIS	CLD - 128.00 MHz - SEATTLE CLEARANCE
GND - 121.70 MHz - SEATTLE GROUND	TWR - 119.90 MHz - SEATTLE TOWER
TWR - 120.95 MHz - SEATTLE TOWER	APP - 133.65 MHz - SEATTLE APPROACH
DEP - 120.10 MHz - SEATTLE DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	11,904 ft	180.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	165.58		0 m	122 m
34R	151 ft	11,904 ft	0.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	345.58		0 m	122 m
16C	151 ft	9,428 ft	180.34	CONCRETE	0 ft	400 ft
	46 m	2,874 m	165.58		0 m	122 m
34C	151 ft	9,428 ft	0.34	CONCRETE	0 ft	397 ft
	46 m	2,874 m	345.58		0 m	121 m
16R	151 ft	8,502 ft	180.34	CONCRETE	0 ft	200 ft
	46 m	2,591 m	165.57		0 m	61 m
34L	151 ft	8,502 ft	0.34	CONCRETE	0 ft	197 ft
	46 m	2,591 m	345.57		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	ISZI	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
16L	DME	ISNQ	110.30 MHz	18 nm	-	-	369 ft
				33 km	-		369 m
16R	DME	ICJL	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34C	DME	ITUC	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
34L	DME	IB EJ	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34R	DME	ISEA	110.30 MHz	18 nm	-	-	469 ft
				33 km	-		469 m
16C	LOC-ILS	ISZI	111.70 MHz	18 nm	180.34	-	355 ft
				33 km	165.57		355 m
16L	LOC-ILS	ISNQ	110.30 MHz	18 nm	180.34	-	338 ft
				33 km	165.58		338 m
16R	LOC-ILS	ICJL	110.75 MHz	18 nm	180.34	-	410 ft
				33 km	165.57		410 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34C	LOC-ILS	ITUC	111.70 MHz	18 nm	0.34	-	422 ft
				33 km	345.57		422 m
34L	LOC-ILS	IBEJ	110.75 MHz	18 nm	0.34	-	433 ft
				33 km	345.57		433 m
34R	LOC-ILS	ISEA	110.30 MHz	18 nm	0.34	-	428 ft
				33 km	345.58		428 m
16C	GS	ISZI	111.70 MHz	10 nm	180.67	3.00	418 ft
				19 km	165.91		418 m
16L	GS	ISNQ	110.30 MHz	10 nm	180.69	3.00	425 ft
				19 km	165.92		425 m
16R	GS	ICJL	110.75 MHz	10 nm	180.67	3.00	410 ft
				19 km	165.91		410 m
34C	GS	ITUC	111.70 MHz	10 nm	0.67	3.00	367 ft
				19 km	345.91		367 m
34L	GS	IBEJ	110.75 MHz	10 nm	0.67	3.00	360 ft
				19 km	345.91		360 m
34R	GS	ISEA	110.30 MHz	10 nm	0.69	2.75	355 ft
				19 km	345.92		355 m