

UHMM

Magadan Sokol Regl


PANC

Ted Stevens Anchorage Airport

2024/05/09 0645Z

UHMM GINAN W317 LUNAD G212 VALDA H222 MCG J111 FFITZ PANC

1700.47 nm / 3149.27 km

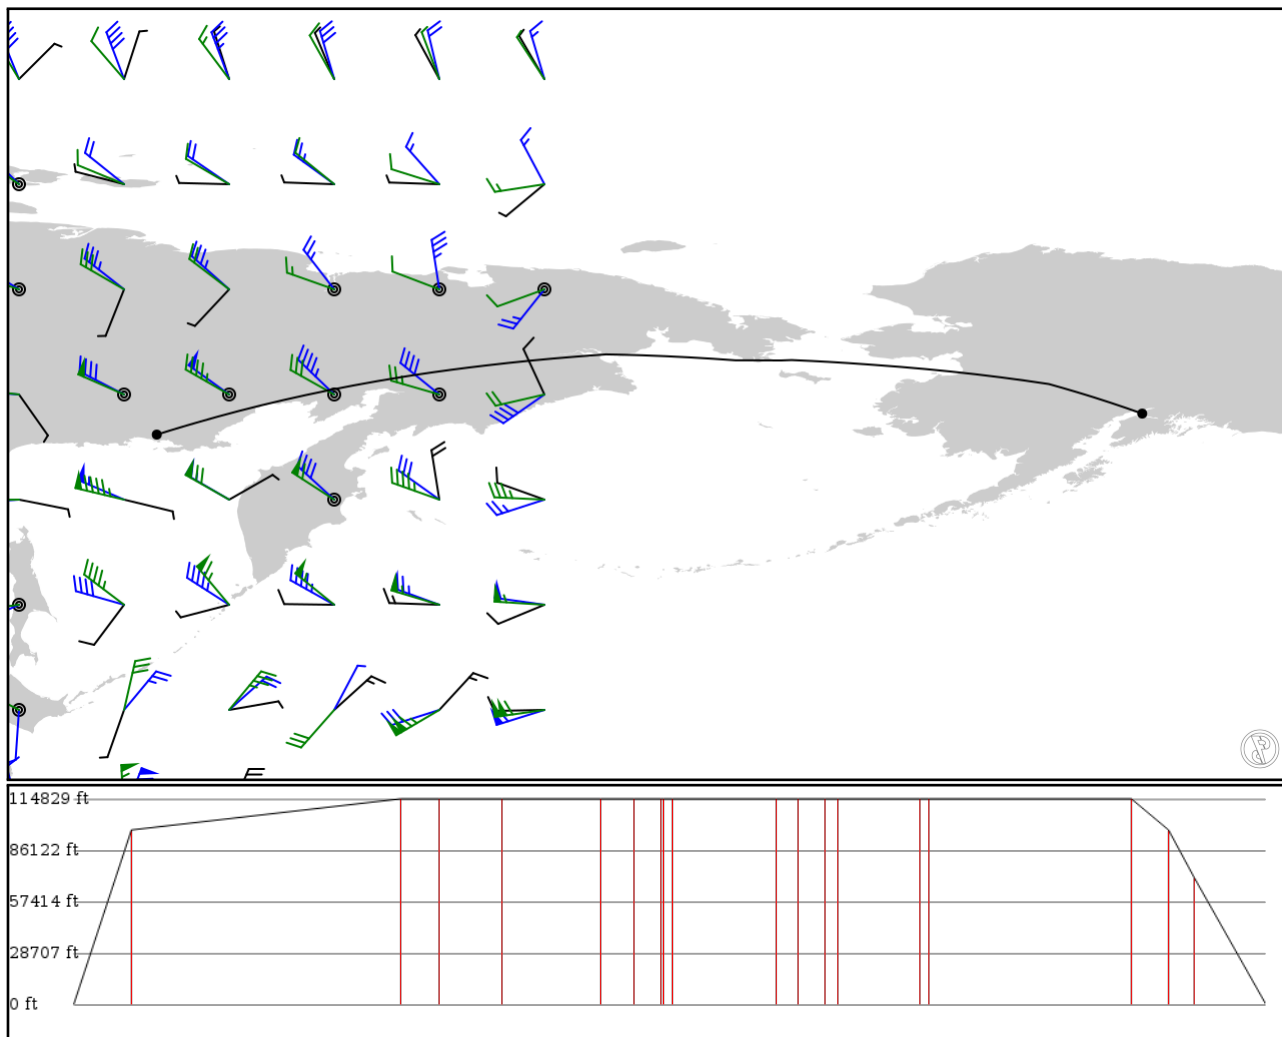

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
UHMM	-	59.91090	0 ft	-	Magadan Sokol Regl
APT	-	150.72000	0 m		
GINAN	-	60.63080	29,700 ft	83	-
FIX	-	153.11100	9,053 m		
SESIN	W317	63.37170	35,000 ft	384	-
FIX	AWY-HI	165.45100	10,668 m		
LUMIR	W317	63.66500	35,000 ft	54	-
FIX	AWY-HI	167.37900	10,668 m		
PELAK	W317	64.07830	35,000 ft	88	-
FIX	AWY-HI	170.60900	10,668 m		
DANUB	W317	64.59500	35,000 ft	140	-
FIX	AWY-HI	175.88600	10,668 m		
LUNAD	W317	64.73500	35,000 ft	48	-
FIX	AWY-HI	177.74100	10,668 m		
GETKA	G212	64.70170	35,000 ft	37	-
FIX	AWY-HI	179.20600	10,668 m		
NALEK	G212	64.69610	35,000 ft	5	-
FIX	AWY-HI	179.40800	10,668 m		
BUMUL	G212	64.68170	35,000 ft	12	-
FIX	AWY-HI	179.89300	10,668 m		
GIRLO	G212	64.37640	35,000 ft	147	-
FIX	AWY-HI	-174.43700	10,668 m		
BC	G212	64.37690	35,000 ft	31	PROVIDENIYA BAY
NDB	AWY-HI	-173.24200	10,668 m		
ABINA	G212	64.36810	35,000 ft	38	-
FIX	AWY-HI	-171.76300	10,668 m		
VALDA	G212	64.39330	35,000 ft	17	-
FIX	AWY-HI	-171.08800	10,668 m		
ICEEE	H222	64.13520	35,000 ft	118	-
FIX	AWY-HI	-166.57800	10,668 m		
SLEDD	H222	64.10120	35,000 ft	12	-
FIX	AWY-HI	-166.11000	10,668 m		
MCG	H222	62.95100	35,000 ft	289	MCGRATH
VOR	AWY-HI	-155.61100	10,668 m		
WINOR	J111	62.49170	29,700 ft	51	-
FIX	AWY-HI	-154.01700	9,053 m		
FFITZ	J111	62.14770	21,600 ft	37	-
FIX	AWY-HI	-152.89200	6,584 m		
PANC	-	61.17440	0 ft	101	Ted Stevens Anchorage Airport
APT	-	-149.99800	0 m		

UHMM

Region: RUSSIA
Timezone: ASIA/MAGADAN
Runways: 1

Elevation: 573 ft / 175 m
Location: 59.910900 150.720000
Magnetic Var: 11.072 W

METAR

UHMM 090630Z 21006MPS 9999 BKN040 04/M01 Q1005 R10/70D NOSIG RMK QFE739 R28/25005MPS

TAF

TAF UHMM 090448Z 0906/1012 27003G10MPS 9999 SCT011 OVC026 TEMPO 0912/0924 0500 FZFG VV005

Frequencies

TWR - 120.80 MHz - MAGADAN TOWER
COM - 119.30 MHz - MAGADAN RADAR

REC - 127.40 MHz - MAGADAN ATIS
GND - 118.90 MHz - MAGADAN GROUND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	194 ft	11,336 ft	92.98	ASPHALT	0 ft	226 ft
	59 m	3,455 m	104.05		0 m	69 m
28	194 ft	11,336 ft	273.03	ASPHALT	0 ft	256 ft
	59 m	3,455 m	284.10		0 m	78 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	LOC-ILS	IFK	110.30 MHz	18 nm	93.00	-	573 ft
				33 km	104.07		573 m
10	GS	IFK	110.30 MHz	10 nm	93.00	3.00	573 ft
				19 km	104.07		573 m

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.026 E

METAR

PANC 090634Z 22008KT 2SM -SN BR BKN007 OVC026 02/M01 A2993

TAF

TAF PANC 090526Z 0906/1012 22014G25KT 5SM -RASN BR BKN007 BKN015 TEMPO 0906/0910 3SM -SN FM091000 19011G20KT 6SM -

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.82		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.88		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.85		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.90		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.86		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.88		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.87		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.84		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.87		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.87		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.84		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.87		151 m