


2024/05/04 1412Z

LFMT PPG LFMP

69.66 nm / 129.02 km

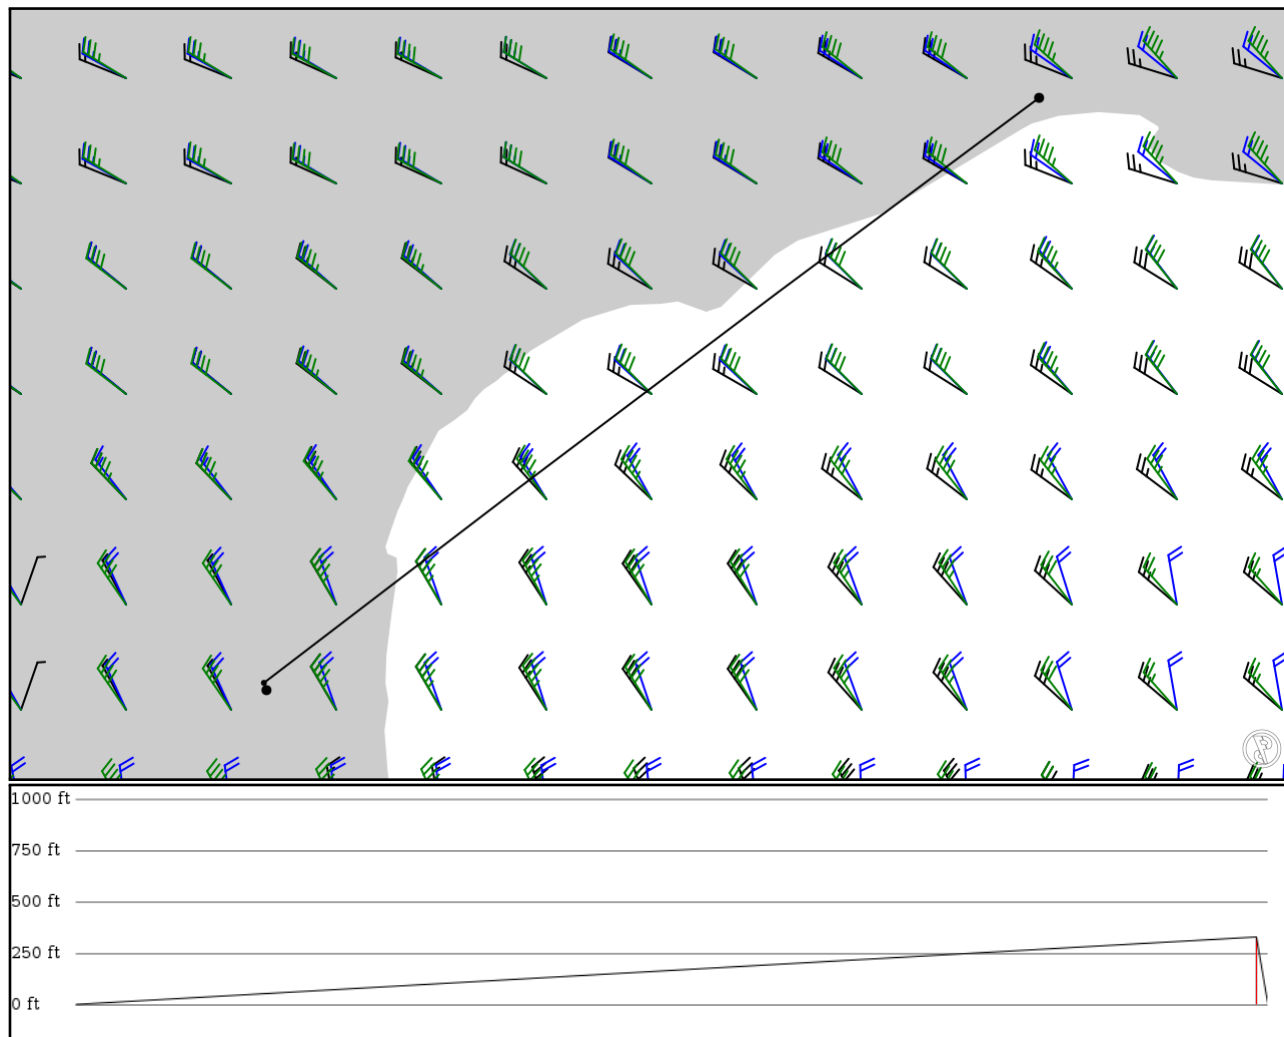

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFMT	-	43.57620	0 ft	-	Montpellier/Mediterranee
APT	-	3.96325	0 m		
PPG	-	42.75050	100 ft	69	PERPIGNAN RIVESALTES
VOR	-	2.86714	30 m		
LFMP	-	42.74020	0 ft	0	Rivesaltes
APT	-	2.87079	0 m		

## LFMT

Region: FRANCE  
Timezone: EUROPE/PARIS  
Runways: 2

Elevation: 17 ft / 5 m  
Location: 43.576200 3.963250  
Magnetic Var: 1.987 E

## METAR

LFMT 041400Z AUTO 14007KT CAVOK 18/10 Q1016 NOSIG

## TAF

TAF LFMT 040800Z 0409/0509 18008KT CAVOK PROB40 TEMPO 0423/0503 VRB15G25KT SHRA FEW040CB BKN060

## Frequencies

REC - 124.12 MHz - MONTPELLIER ATIS	GND - 121.95 MHz - MONTPELLIER GND
TWR - 118.20 MHz - MONTPELLIER TWR	TWR - 118.77 MHz - MONTPELLIER TWR
APP - 120.37 MHz - MONTPELLIER APP	APP - 130.85 MHz - MONTPELLIER APP
APP - 133.77 MHz - MONTPELLIER APP	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12L	164 ft	8,539 ft	124.83	ASPHALT	0 ft	0 ft
	50 m	2,603 m	122.85		0 m	0 m
30R	164 ft	8,539 ft	304.85	ASPHALT	0 ft	0 ft
	50 m	2,603 m	302.86		0 m	0 m
12R	98 ft	3,612 ft	124.80	ASPHALT	328 ft	0 ft
	30 m	1,101 m	122.81		100 m	0 m
30L	98 ft	3,612 ft	304.81	ASPHALT	0 ft	0 ft
	30 m	1,101 m	302.82		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30R	LOC-ILS	FG	108.55 MHz	18 nm	304.75	-	16 ft
				33 km	302.76		16 m
30R	GS	FG	108.55 MHz	10 nm	305.50	3.00	16 ft
				19 km	303.51		16 m

## LFMP

Region: FRANCE  
Timezone: EUROPE/PARIS  
Runways: 2

Elevation: 143 ft / 44 m  
Location: 42.740200 2.870790  
Magnetic Var: 1.726 E

## METAR

LFMP 041400Z AUTO 06009KT 020V100 CAVOK 20/10 Q1014 NOSIG

## TAF

TAF LFMP 040800Z 0409/0509 05010KT 9999 SCT070 BKN180 BECMG 0418/0420 VRB03KT BECMG 0500/0503 BKN010

## Frequencies

REC - 127.87 MHz - LFMP ATIS  
APP - 120.75 MHz - PERPIGNAN APP

TWR - 118.30 MHz - PERPIGNAN TWR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	148 ft	8,296 ft	148.79	ASPHALT	0 ft	230 ft
	45 m	2,529 m	147.06		0 m	70 m
33	148 ft	8,296 ft	328.80	ASPHALT	558 ft	230 ft
	45 m	2,529 m	327.07		170 m	70 m
13	66 ft	3,635 ft	129.20	ASPHALT	0 ft	528 ft
	20 m	1,108 m	127.47		0 m	161 m
31	66 ft	3,635 ft	309.21	ASPHALT	0 ft	0 ft
	20 m	1,108 m	307.48		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
33	DME	PL	111.75 MHz	18 nm	-	-	183 ft
				33 km	-		183 m
33	LOC-ILS	PL	111.75 MHz	18 nm	328.30	-	124 ft
				33 km	326.57		124 m
33	GS	PL	111.75 MHz	10 nm	328.77	3.00	124 ft
				19 km	327.04		124 m