

KBOS

Boston Logan Intl


KDCA

Washington National

2024/05/15 0522Z

KBOS SORRY V3 CMK J75 MXE KDCA

348.21 nm / 644.89 km

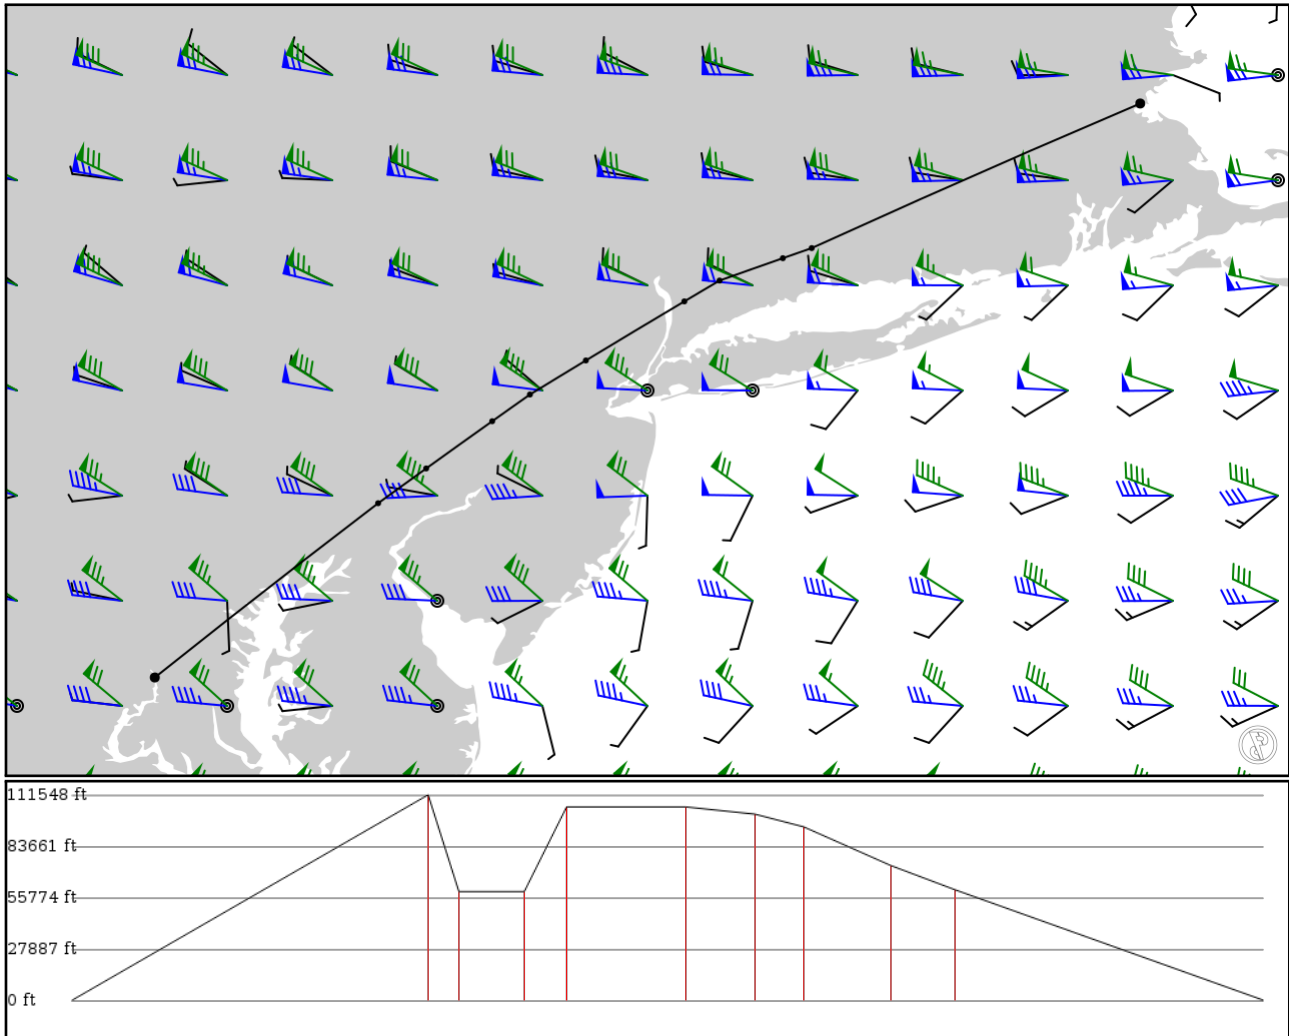

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KBOS	-	42.36306	0 ft	-	Boston Logan Intl
APT	-	-71.00696	0 m	-	
SORRY	-	41.47864	34,000 ft	104	-
FIX	-	-73.01741	10,363 m	-	-
RACEY	V3	41.41693	18,000 ft	8	-
FIX	AWY-LO	-73.19392	5,486 m	-	-
CMK	V3	41.28008	18,000 ft	19	CARMEL VOR-DME
VOR	AWY-LO	-73.58133	5,486 m	-	
DUEYS	J75	41.15263	32,000 ft	12	-
FIX	AWY-HI	-73.79681	9,754 m	-	-
JERSY	J75	40.79139	32,000 ft	34	-
FIX	AWY-HI	-74.39944	9,754 m	-	-
SBJ	J75	40.58306	30,800 ft	19	SOLBERG VOR-DME
VOR	AWY-HI	-74.74181	9,388 m	-	
BIGGY	J75	40.41966	28,700 ft	14	-
FIX	AWY-HI	-74.97266	8,748 m	-	-
COPEs	J75	40.13071	22,300 ft	25	-
FIX	AWY-HI	-75.37677	6,797 m	-	-
MXE	J75	39.91806	18,300 ft	18	MODENA VORTAC
VOR	AWY-HI	-75.67081	5,578 m	-	
KDCA	-	38.85205	0 ft	90	Washington National
APT	-	-77.03770	0 m	-	

KBOS

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 6

Elevation: 19 ft / 6 m
Location: 42.363000 -71.006800
Magnetic Var: 14.286 W

METAR

KBOS 150454Z 21012KT 10SM BKN130 OVC250 16/12 A2992 RMK A02 SLP130 T01610122 402500106

TAF

TAF KBOS 142325Z 1500/1606 20012G19KT P6SM SCT250 FM150200 21010KT P6SM SCT100 BKN150 FM151800 12010KT P6SM BKN060

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 121.65 MHz - CLEARANCE DELIVERY	GND - 121.75 MHz - BOSTON GROUND
GND - 121.90 MHz - BOSTON GROUND	TWR - 128.80 MHz - BOSTON TOWER
TWR - 124.72 MHz - BOSTON TOWER	TWR - 132.22 MHz - BOSTON TOWER
APP - 118.25 MHz - BOSTON APPROACH	APP - 120.60 MHz - BOSTON APPROACH
APP - 127.20 MHz - BOSTON APPROACH	DEP - 133.00 MHz - BOSTON DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	148 ft	10,092 ft	135.27	ASPHALT	883 ft	197 ft
	45 m	3,076 m	149.56		269 m	60 m
33L	148 ft	10,092 ft	315.29	ASPHALT	0 ft	167 ft
	45 m	3,076 m	329.57		0 m	51 m
04R	148 ft	10,012 ft	19.69	ASPHALT	1,155 ft	420 ft
	45 m	3,052 m	33.97		352 m	128 m
22L	148 ft	10,012 ft	199.69	ASPHALT	1,201 ft	200 ft
	45 m	3,052 m	213.98		366 m	61 m
04L	148 ft	7,871 ft	19.66	ASPHALT	0 ft	1,250 ft
	45 m	2,399 m	33.94		0 m	381 m
22R	148 ft	7,871 ft	199.66	ASPHALT	820 ft	200 ft
	45 m	2,399 m	213.95		250 m	61 m
09	148 ft	7,008 ft	76.51	ASPHALT	0 ft	932 ft
	45 m	2,136 m	90.80		0 m	284 m
27	148 ft	7,008 ft	256.53	ASPHALT	0 ft	161 ft
	45 m	2,136 m	270.81		0 m	49 m
14	98 ft	5,005 ft	125.76	ASPHALT	0 ft	0 ft
	30 m	1,526 m	140.05		0 m	0 m
32	98 ft	5,005 ft	305.77	ASPHALT	0 ft	801 ft
	30 m	1,526 m	320.06		0 m	244 m
15L	98 ft	2,558 ft	135.31	ASPHALT	0 ft	305 ft
	30 m	780 m	149.59		0 m	93 m
33R	98 ft	2,558 ft	315.31	ASPHALT	0 ft	59 ft
	30 m	780 m	329.60		0 m	18 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IBOS	110.30 MHz	18 nm	-	-	35 ft
				33 km	-		35 m
15R	DME	IMDC	110.70 MHz	18 nm	-	-	27 ft
				33 km	-		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	DME	ILQN	110.30 MHz	18 nm 33 km	- -	-	35 ft 35 m
27	DME	IDGU	111.30 MHz	18 nm 33 km	- -	-	28 ft 28 m
33L	DME	ILIP	110.70 MHz	18 nm 33 km	- -	-	19 ft 19 m
04R	LOC-ILS	IBOS	110.30 MHz	18 nm 33 km	19.68 33.97	-	20 ft 20 m
15R	LOC-ILS	IMDC	110.70 MHz	18 nm 33 km	135.28 149.57	-	20 ft 20 m
22L	LOC-ILS	ILQN	110.30 MHz	18 nm 33 km	199.68 213.97	-	20 ft 20 m
27	LOC-ILS	IDGU	111.30 MHz	18 nm 33 km	256.52 270.81	-	20 ft 20 m
33L	LOC-ILS	ILIP	110.70 MHz	18 nm 33 km	315.28 329.57	-	20 ft 20 m
04R	GS	IBOS	110.30 MHz	10 nm 19 km	19.68 33.97	3.00	20 ft 20 m
15R	GS	IMDC	110.70 MHz	10 nm 19 km	135.28 149.57	3.00	20 ft 20 m
22L	GS	ILQN	110.30 MHz	10 nm 19 km	199.68 213.97	3.00	20 ft 20 m
27	GS	IDGU	111.30 MHz	10 nm 19 km	256.52 270.81	3.00	20 ft 20 m
33L	GS	ILIP	110.70 MHz	10 nm 19 km	315.28 329.57	3.00	20 ft 20 m

KDCA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 15 ft / 5 m
Location: 38.851400 -77.037700
Magnetic Var: 10.880 W

METAR

KDCA 150452Z 12006KT 10SM -RA BKN016 BKN020 OVC110 17/14 A2982 RMK AO2 SLP096 P0000 T01720144 402060167

TAF

KDCA 150257Z 1503/1606 15006KT P6SM -RA OVC015 FM150500 14005KT 5SM -SHRA BR OVC008 FM150800 11005KT 4SM SHRA BR O

Frequencies

REC - 132.65 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.25 MHz - CLEARANCE DELIVERY	GND - 121.70 MHz - WASHINGTON GROUND
TWR - 119.10 MHz - WASHINGTON TOWER	TWR - 134.35 MHz - WASHINGTON TOWER
APP - 119.85 MHz - POTOMAC APPROACH	APP - 124.20 MHz - POTOMAC APPROACH
APP - 124.70 MHz - POTOMAC APPROACH	DEP - 118.95 MHz - POTOMAC DEPARTURE
DEP - 125.65 MHz - POTOMAC DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01	151 ft	7,183 ft	355.53	ASPHALT	0 ft	200 ft
	46 m	2,190 m	6.41		0 m	61 m
19	151 ft	7,183 ft	175.53	ASPHALT	0 ft	197 ft
	46 m	2,190 m	186.41		0 m	60 m
15	151 ft	5,205 ft	142.76	ASPHALT	0 ft	413 ft
	46 m	1,587 m	153.64		0 m	126 m
33	151 ft	5,205 ft	322.77	ASPHALT	0 ft	180 ft
	46 m	1,587 m	333.65		0 m	55 m
04	151 ft	5,009 ft	25.45	ASPHALT	203 ft	0 ft
	46 m	1,527 m	36.33		62 m	0 m
22	151 ft	5,009 ft	205.46	ASPHALT	0 ft	381 ft
	46 m	1,527 m	216.34		0 m	116 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	DME	IDCA	109.90 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
19	DME	IVWH	108.50 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
01	LOC-ILS	IDCA	109.90 MHz	18 nm	355.51	-	15 ft
				33 km	6.39		15 m
01	GS	IDCA	109.90 MHz	10 nm	355.51	3.00	15 ft
				19 km	6.39		15 m