

# LIML

Milano-Linate "Enrico Forlanini"


# LIRP

Pisa-San Giusto "Galileo Galilei"

2024/06/07 0756Z

LIML MIVKI LIRP

116.52 nm / 215.79 km

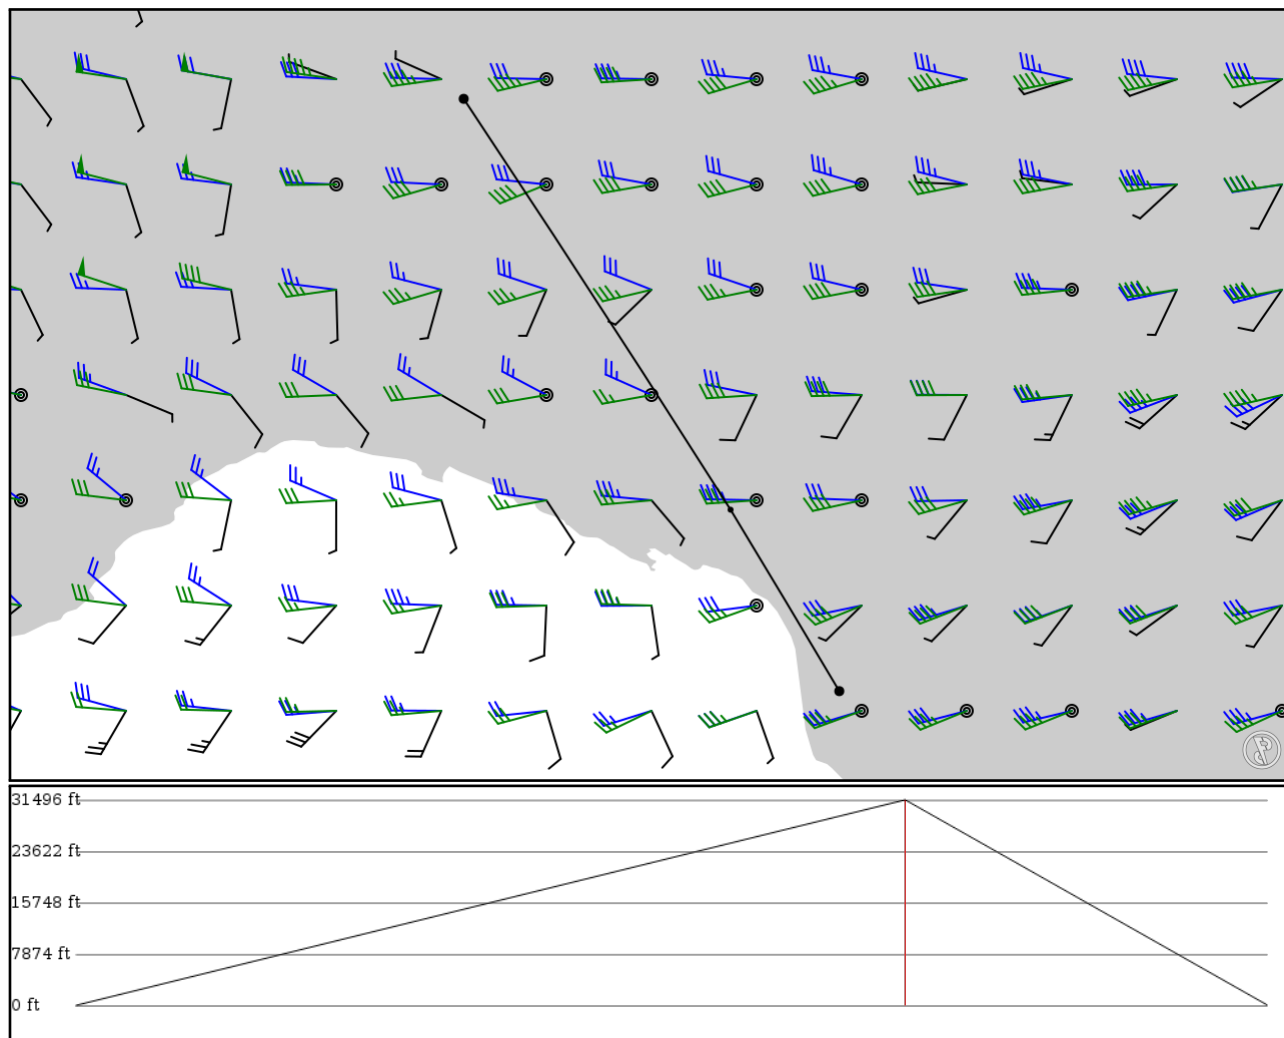

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 15000ft
- Cruise Speed: 330kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
LIML	-	45.45030	0 ft	-	Milano-Linate	"Enrico Forlanini"
APT	-	9.27281	0 m			
MIVKI	-	44.22420	9,600 ft	81	-	
FIX	-	10.07060	2,926 m			
LIRP	-	43.68280	0 ft	35	Pisa-San Giusto	"Galileo Galilei"
APT	-	10.39560	0 m			

## LIML

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 354 ft / 108 m  
Location: 45.450300 9.272810  
Magnetic Var: 3.248 E

## METAR

LIML 070720Z 25005KT 190V280 9999 BKN090 21/18 Q1018 NOSIG

## TAF

TAF LIML 070500Z 0706/0806 VRB05KT 9999 SCT050

## Frequencies

REC - 136.37 MHz - ATIS	GND - 121.80 MHz - LINATE GROUND
TWR - 118.40 MHz - LINATE TOWER	TWR - 118.10 MHz - LINATE TOWER
APP - 134.17 MHz - MILANO RADAR	APP - 126.75 MHz - MILANO RADAR
APP - 126.30 MHz - MILANO RADAR	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	197 ft	8,019 ft	175.67	ASPHALT	0 ft	200 ft
	60 m	2,444 m	172.42		0 m	61 m
36	197 ft	8,019 ft	355.67	ASPHALT	0 ft	413 ft
	60 m	2,444 m	352.42		0 m	126 m
17	72 ft	1,974 ft	175.66	ASPHALT	0 ft	0 ft
	22 m	602 m	172.42		0 m	0 m
35	72 ft	1,974 ft	355.66	ASPHALT	0 ft	0 ft
	22 m	602 m	352.42		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36	DME	ILNT	109.55 MHz	25 nm	-	-	352 ft
				46 km	-		352 m
36	LOC-ILS	ILNT	109.55 MHz	18 nm	355.69	-	353 ft
				33 km	352.44		353 m
36	GS	ILNT	109.55 MHz	10 nm	355.68	3.00	352 ft
				19 km	352.43		352 m

## LIRP

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 4 ft / 1 m  
Location: 43.682800 10.395600  
Magnetic Var: 3.417 E

## METAR

LIRP 070715Z 16003KT 080V230 9999 SCT020 21/19 Q1019 NOSIG

## TAF

TAF LIRP 070500Z 0706/0806 VRB05KT 9999 SCT020 BECMG 0710/0712 26008KT FEW050 BECMG 0722/0724 10006KT

## Frequencies

GND - 121.60 MHz - PISA GROUND  
TWR - 119.10 MHz - PISA TOWER  
APP - 122.10 MHz - PISA APPROACH

TWR - 122.10 MHz - PISA TOWER  
APP - 124.27 MHz - PISA APPROACH  
APP - 126.07 MHz - PISA APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	148 ft	9,825 ft	36.73	ASPHALT	463 ft	0 ft
	45 m	2,995 m	33.31		141 m	0 m
22L	148 ft	9,825 ft	216.74	ASPHALT	833 ft	190 ft
	45 m	2,995 m	213.32		254 m	58 m
04L	148 ft	8,984 ft	36.71	ASPHALT	791 ft	0 ft
	45 m	2,738 m	33.30		241 m	0 m
22R	148 ft	8,984 ft	216.73	ASPHALT	0 ft	190 ft
	45 m	2,738 m	213.31		0 m	58 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	LOC-ILS	IPI	109.70 MHz	18 nm	36.76	-	7 ft
				33 km	33.35		7 m
04R	GS	IPI	109.70 MHz	10 nm	37.45	3.00	3 ft
				19 km	34.03		3 m