

KFLL

Fort Lauderdale Hollywood Intl


MYNN

Nassau Intl

2024/05/12 0140Z

KFLL DEKAL **BR22V** WIERS **BR57V** ZBV **A555** HINZY MYNN

158.30 nm / 293.16 km

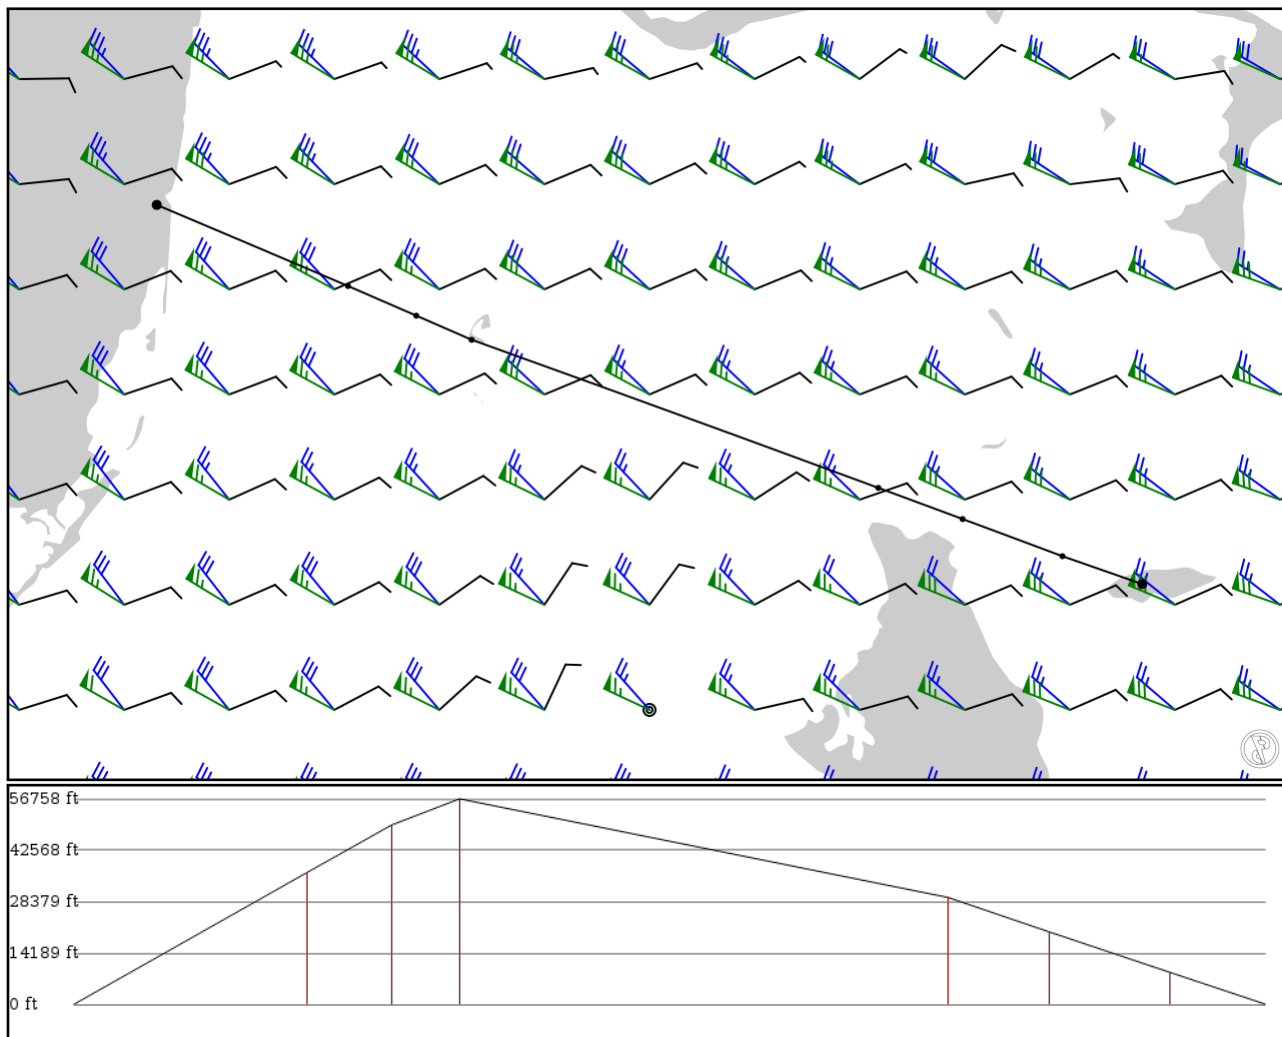

Notes

Basic altitude profile:

- Ascent Rate: 1200ft/min
- Ascent Speed: 132kts
- Cruise Altitude: 1000ft
- Cruise Speed: 200kts
- Descent Rate: 1000ft/min
- Descent Speed: 152kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KFLL APT	- -	26.07164 -80.15269	0 ft 0 m	-	Fort Lauderdale Hollywood Intl
DEKAL FIX	- -	25.85056 -79.63136	11,100 ft 3,383 m	31 -	
WIERS FIX	BR22V AWY-LO	25.76988 -79.44536	15,100 ft 4,602 m	11 -	
ZBV VOR	BR57V AWY-LO	25.70417 -79.29444	17,300 ft 5,273 m	9	BIMINI VORTAC
RAJAY FIX	A555 AWY-LO	25.30077 -78.18597	9,000 ft 2,743 m	64 -	
PRUNE FIX	A555 AWY-LO	25.21577 -77.95617	6,100 ft 1,859 m	13 -	
HINZY FIX	A555 AWY-LO	25.11452 -77.68411	2,700 ft 823 m	15 -	
MYNN APT	- -	25.03860 -77.46662	0 ft 0 m	12	Nassau Intl

KFLL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 65 ft / 20 m
Location: 26.071300 -80.149500
Magnetic Var: 7.390 W

METAR

KFLL 120053Z 26018G24KT 10SM FEW055 31/24 A2984 RMK A02 PK WND 25026/0018 SLP102 T03110239

TAF

TAF KFLL 112337Z 1200/1306 28012G20KT P6SM FEW035 SCT060 FM120600 32008KT P6SM SCT030 BKN060 FM121100 04009KT P6S

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m

MYNN

Region: BAHAMAS
Timezone: AMERICA/NASSAU
Runways: 2

Elevation: 16 ft / 5 m
Location: 25.038700 -77.466800
Magnetic Var: 8.781 W

METAR

MYNN 120100Z VRB02KT CAVOK 27/23 A2989

TAF

TAF MYNN 112334Z 1200/1224 VRB02KT CAVOK BECMG 1213/1215 01008KT 9999 FEW030

Frequencies

REC - 118.70 MHz - ATIS	CLD - 118.30 MHz - NASSAU CLEARANCE
GND - 121.70 MHz - NASSAU GROUND	TWR - 119.50 MHz - NASSAU TOWER
APP - 121.00 MHz - NASSAU APPROACH	APP - 125.30 MHz - NASSAU APPROACH
DEP - 121.00 MHz - NASSAU DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14	151 ft	11,136 ft	134.80	CONCRETE	210 ft	0 ft
	46 m	3,394 m	143.58		64 m	0 m
32	151 ft	11,136 ft	314.81	CONCRETE	0 ft	0 ft
	46 m	3,394 m	323.59		0 m	0 m
10	151 ft	8,282 ft	89.67	CONCRETE	0 ft	0 ft
	46 m	2,524 m	98.45		0 m	0 m
28	151 ft	8,282 ft	269.68	CONCRETE	0 ft	0 ft
	46 m	2,524 m	278.46		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
14	LOC-ILS	IZQA	110.10 MHz	18 nm	134.83	-	7 ft
				33 km	143.61		7 m
14	GS	IZQA	110.10 MHz	10 nm	135.66	3.00	8 ft
				19 km	144.44		8 m