

RJTT

Tokyo Haneda Intl


RJCC

NEW CHITOSE

2024/05/07 0237Z

RJTT NZE Y11 MWE30 RJCC

443.02 nm / 820.48 km

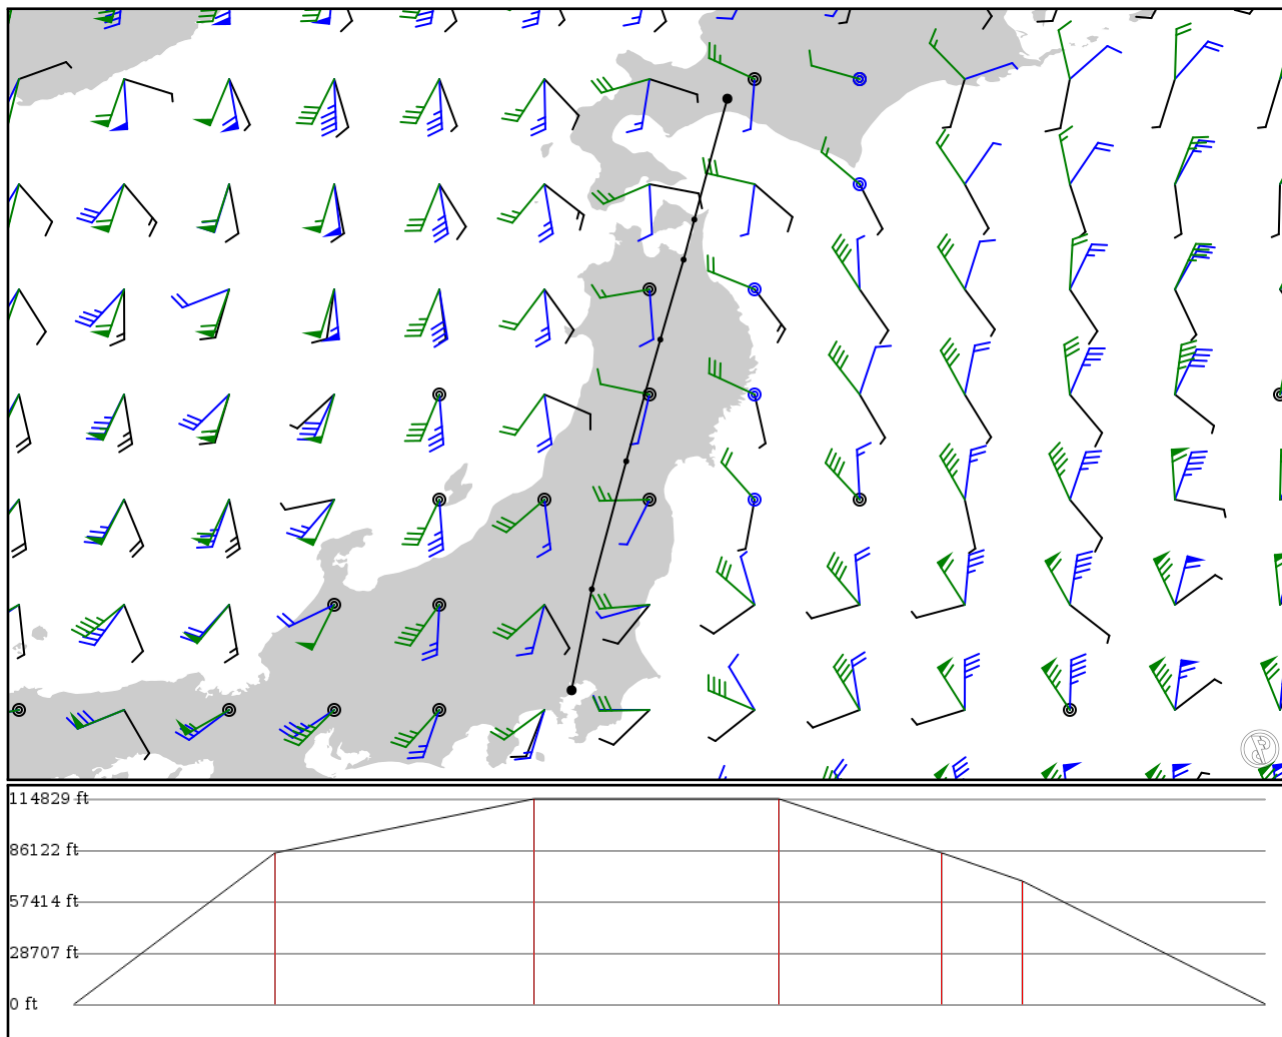

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJTT APT	-	35.54825 139.78855	0 ft 0 m	-	Tokyo Haneda Intl
NZE VOR	-	36.78267 140.03580	25,800 ft 7,864 m	75	NASU VOR-DME
KAEDE FIX	Y11 AWY-HI	38.34573 140.45605	35,000 ft 10,668 m	95	-
PEONY FIX	Y11 AWY-HI	39.83271 140.87292	35,000 ft 10,668 m	91	-
MWE VOR	Y11 AWY-HI	40.80891 141.15736	25,800 ft 7,864 m	60	TOHOKU VOR-DME
MWE30 FIX	Y11 AWY-HI	41.29925 141.28855	21,000 ft 6,401 m	30	-
RJCC APT	-	42.77521 141.69228	0 ft 0 m	90	NEW CHITOSE

RJTT

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 4

Elevation: 20 ft / 6 m
Location: 35.547900 139.789000
Magnetic Var: 7.805 W

METAR

RJTT 070200Z 18011KT 9999 -SHRA FEW010 SCT015 BKN050 21/18 Q1010 TEMPO 20020G30KT RMK 1CU010 4CU015 7SC050 A2984

TAF

TAF RJTT 062306Z 0700/0806 19024KT 8000 -SHRA FEW008 BKN015 TEMPO 0701/0710 19026G36KT TEMPO 0710/0715 FEW005 BKN

Frequencies

REC - 128.80 MHz - TOKYO ATIS	CLD - 121.87 MHz - TOKYO DELIVERY
CLD - 121.82 MHz - TOKYO DELIVERY	GND - 118.22 MHz - TOKYO GROUND
GND - 121.62 MHz - TOKYO GROUND	GND - 121.70 MHz - TOKYO GROUND
GND - 121.97 MHz - TOKYO GROUND	GND - 122.07 MHz - TOKYO GROUND
TWR - 118.10 MHz - TOKYO TOWER	TWR - 118.57 MHz - TOKYO TOWER
TWR - 118.72 MHz - TOKYO TOWER	TWR - 124.35 MHz - TOKYO TOWER
TWR - 118.80 MHz - TOKYO TOWER	TWR - 116.20 MHz - TOKYO TOWER
APP - 119.10 MHz - TOKYO APPROACH	APP - 119.40 MHz - TOKYO APPROACH
APP - 119.65 MHz - TOKYO APPROACH	APP - 119.70 MHz - TOKYO APPROACH
APP - 125.40 MHz - TOKYO APPROACH	APP - 121.27 MHz - TOKYO APPROACH
APP - 124.40 MHz - TOKYO APPROACH	APP - 125.20 MHz - TOKYO APPROACH
APP - 125.80 MHz - TOKYO APPROACH	APP - 127.70 MHz - TOKYO APPROACH
DEP - 126.00 MHz - TOKYO DEPARTURE	DEP - 120.80 MHz - TOKYO DEPARTURE
DEP - 127.50 MHz - TOKYO DEPARTURE	DEP - 127.60 MHz - TOKYO DEPARTURE
DEP - 124.20 MHz - TOKYO DEPARTURE	DEP - 119.60 MHz - TOKYO DEPARTURE
DEP - 120.60 MHz - TOKYO DEPARTURE	DEP - 125.52 MHz - TOKYO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	197 ft	11,039 ft	150.01	ASPHALT	0 ft	190 ft
	60 m	3,365 m	157.82		0 m	58 m
34R	197 ft	11,039 ft	330.02	ASPHALT	1,181 ft	194 ft
	60 m	3,365 m	337.83		360 m	59 m
04	197 ft	8,211 ft	34.92	ASPHALT	0 ft	194 ft
	60 m	2,503 m	42.73		0 m	59 m
22	197 ft	8,211 ft	214.93	ASPHALT	0 ft	190 ft
	60 m	2,503 m	222.74		0 m	58 m
16R	197 ft	9,855 ft	149.98	ASPHALT	0 ft	0 ft
	60 m	3,004 m	157.79		0 m	0 m
34L	197 ft	9,855 ft	329.99	ASPHALT	0 ft	190 ft
	60 m	3,004 m	337.80		0 m	58 m
05	197 ft	8,206 ft	42.44	ASPHALT	0 ft	190 ft
	60 m	2,501 m	50.25		0 m	58 m
23	197 ft	8,206 ft	222.45	ASPHALT	0 ft	194 ft
	60 m	2,501 m	230.26		0 m	59 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	DME	IAD	108.10 MHz	18 nm	-	-	46 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	-		46 m
23	DME	ITD	110.50 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
34L	DME	IHA	111.70 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
34R	DME	ITC	108.90 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
16L	LOC-ILS	IOC	111.95 MHz	18 nm	150.02	-	20 ft
				33 km	157.83		20 m
16R	LOC-ILS	ITA	111.55 MHz	18 nm	149.99	-	20 ft
				33 km	157.80		20 m
22	LOC-ILS	IAD	108.10 MHz	18 nm	214.93	-	20 ft
				33 km	222.74		20 m
23	LOC-ILS	ITD	110.50 MHz	18 nm	222.45	-	20 ft
				33 km	230.26		20 m
34L	LOC-ILS	IHA	111.70 MHz	18 nm	329.99	-	20 ft
				33 km	337.80		20 m
34R	LOC-ILS	ITC	108.90 MHz	18 nm	330.02	-	20 ft
				33 km	337.83		20 m
16L	GS	IOC	111.95 MHz	10 nm	150.02	3.00	20 ft
				19 km	157.83		20 m
16R	GS	ITA	111.55 MHz	10 nm	149.99	3.00	20 ft
				19 km	157.80		20 m
22	GS	IAD	108.10 MHz	10 nm	214.93	3.00	20 ft
				19 km	222.74		20 m
23	GS	ITD	110.50 MHz	10 nm	222.45	3.00	20 ft
				19 km	230.26		20 m
34L	GS	IHA	111.70 MHz	10 nm	329.99	3.00	20 ft
				19 km	337.80		20 m
34R	GS	ITC	108.90 MHz	10 nm	330.02	3.00	20 ft
				19 km	337.83		20 m

RJCC

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 82 ft / 25 m
Location: 42.775300 141.693000
Magnetic Var: 9.648 W

METAR

RJCC 070200Z 15013KT 6000 -SHRA FEW001 BKN003 BKN004 14/13 Q1003 RMK 1ST001 5ST003 7ST004 A2963

TAF

TAF RJCC 062305Z 0700/0806 16010KT 9999 -SHRA FEW003 BKN015 TEMPO 0700/0706 1500 SHRA BR FEW001 BKN003 BECMG 0705/

Frequencies

APP - 120.10 MHz - CHITOSE APPROACH	APP - 124.70 MHz - CHITOSE APPROACH
DEP - 124.70 MHz - CHITOSE DEPARTURE	APP - 127.70 MHz - TCA
TWR - 118.80 MHz - TOWER	TWR - 126.20 MHz - TOWER
GND - 121.60 MHz - GROUND	GND - 121.70 MHz - GROUND
GND - 121.95 MHz - GROUND	CLD - 121.90 MHz - CHITOSE DELIVERY
REC - 128.60 MHz - NEW CHITOSE AIRPORT	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	200 ft	9,852 ft	352.63	ASPHALT	0 ft	190 ft
	61 m	3,003 m	2.28		0 m	58 m
19R	200 ft	9,852 ft	172.63	ASPHALT	0 ft	190 ft
	61 m	3,003 m	182.28		0 m	58 m
01R	200 ft	9,854 ft	352.64	ASPHALT	0 ft	194 ft
	61 m	3,004 m	2.29		0 m	59 m
19L	200 ft	9,854 ft	172.64	ASPHALT	0 ft	190 ft
	61 m	3,004 m	182.28		0 m	58 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICN	110.90 MHz	18 nm	-	-	81 ft
				33 km	-		81 m
01R	DME	ICH	110.75 MHz	18 nm	-	-	83 ft
				33 km	-		83 m
19R	DME	ICS	111.50 MHz	18 nm	-	-	82 ft
				33 km	-		82 m
01L	LOC-ILS	ICN	110.90 MHz	18 nm	352.63	-	82 ft
				33 km	2.28		82 m
01R	LOC-ILS	ICH	110.75 MHz	18 nm	352.64	-	82 ft
				33 km	2.29		82 m
19L	LOC-ILS	ICM	109.35 MHz	18 nm	172.64	-	82 ft
				33 km	182.29		82 m
19R	LOC-ILS	ICS	111.50 MHz	18 nm	172.63	-	82 ft
				33 km	182.28		82 m
01L	GS	ICN	110.90 MHz	10 nm	352.63	3.00	82 ft
				19 km	2.28		82 m
01R	GS	ICH	110.75 MHz	10 nm	352.64	3.00	82 ft
				19 km	2.29		82 m
19L	GS	ICM	109.35 MHz	10 nm	172.64	3.00	82 ft
				19 km	182.29		82 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19R	GS	ICS	111.50 MHz	10 nm	172.63	3.00	82 ft
				19 km	182.28		82 m