


2024/05/06 2127Z

RJAA KOGEN Y28 KOMAK RJ00

250.01 nm / 463.02 km

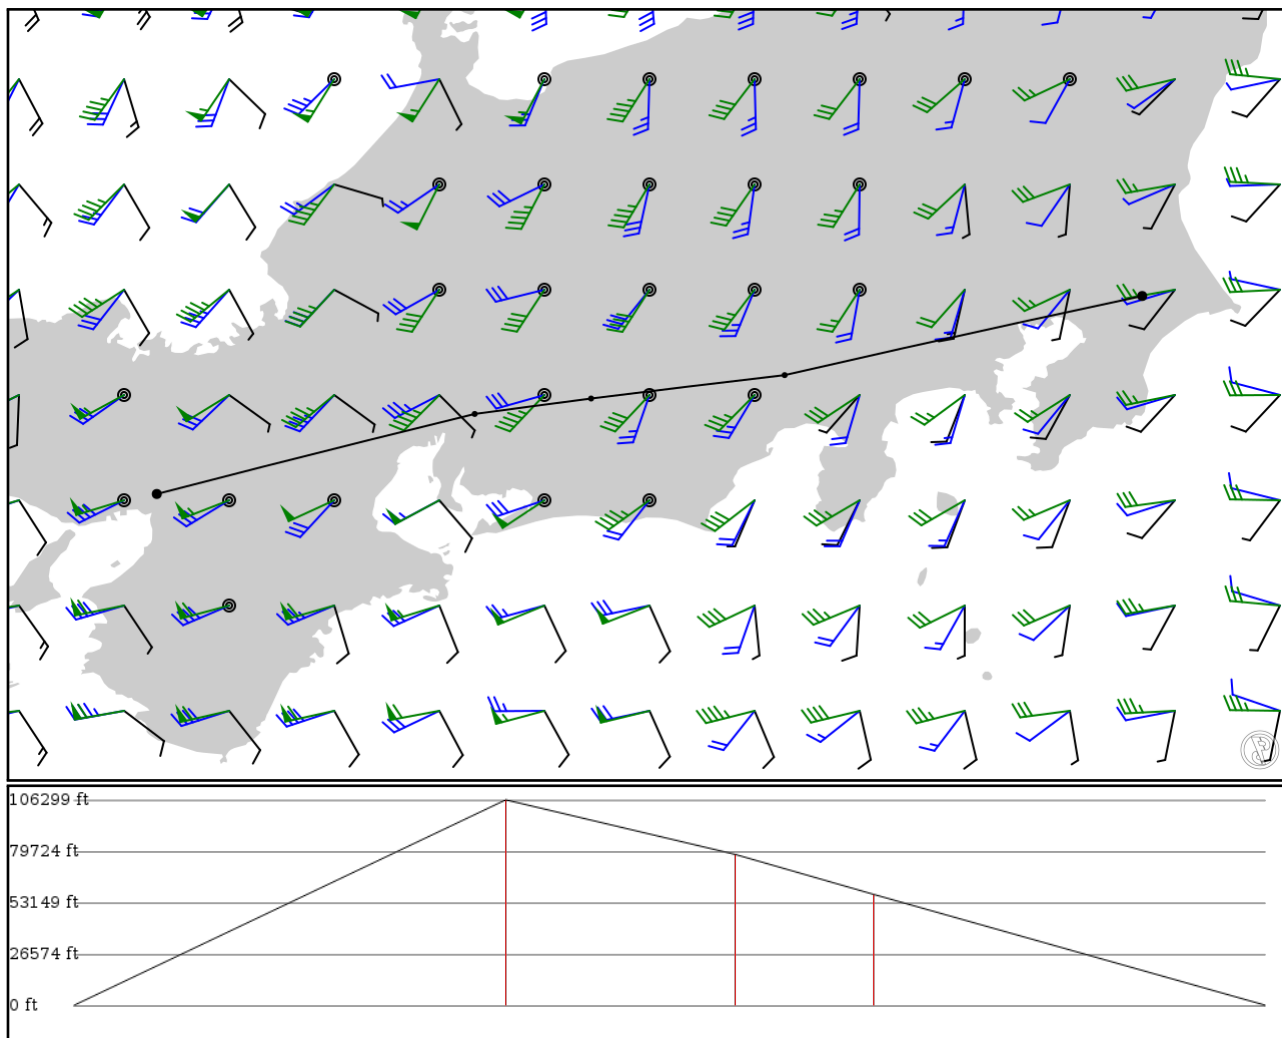

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJAA	-	35.77710	0 ft	-	Narita Intl
APT	-	140.38200	0 m	-	
KOGEN	-	35.38090	32,400 ft	90	-
FIX	-	138.58800	9,876 m	-	
ENNAR	Y28	35.26370	23,800 ft	48	-
FIX	AWY-HI	137.61700	7,254 m	-	
KOMAK	Y28	35.18640	17,500 ft	29	-
FIX	AWY-HI	137.03300	5,334 m	-	
RJ00	-	34.78560	0 ft	82	Osaka Intl
APT	-	135.43800	0 m	-	

RJAA

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 135 ft / 41 m
Location: 35.777200 140.382000
Magnetic Var: 7.777 W

METAR

RJAA 062100Z 18008KT 9999 -SHRA FEW015 SCT030 BKN130 20/17 Q1013 NOSIG RMK 1CU015 3CU030 7AC130 A2992

TAF

TAF RJAA 061705Z 0618/0800 18012KT 9999 FEW010 BKN020 TEMPO 0700/0709 17018G28KT TEMPO 0709/0715 4000 SHRA BR FEW010

Frequencies

REC - 128.25 MHz - ATIS	TWR - 122.70 MHz - NARITA TOWER
TWR - 126.20 MHz - NARITA TOWER	TWR - 118.35 MHz - NARITA TOWER
TWR - 118.20 MHz - NARITA TOWER	GND - 121.85 MHz - NARITA GROUND
GND - 121.95 MHz - NARITA GROUND	GND - 121.60 MHz - NARITA GROUND
GND - 121.75 MHz - NARITA GROUND	APP - 125.20 MHz - NARITA APPROACH
APP - 124.40 MHz - NARITA APPROACH	APP - 121.27 MHz - NARITA APPROACH
APP - 125.80 MHz - NARITA APPROACH	APP - 127.70 MHz - NARITA APPROACH
DEP - 120.60 MHz - NARITA DEPARTURE	DEP - 127.50 MHz - NARITA DEPARTURE
DEP - 119.60 MHz - NARITA DEPARTURE	DEP - 125.52 MHz - NARITA DEPARTURE
DEP - 124.20 MHz - NARITA DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16R	197 ft	13,146 ft	149.63	ASPHALT	0 ft	407 ft
	60 m	4,007 m	157.41		0 m	124 m
34L	197 ft	13,146 ft	329.64	ASPHALT	0 ft	404 ft
	60 m	4,007 m	337.42		0 m	123 m
16L	197 ft	8,210 ft	149.61	ASPHALT	0 ft	197 ft
	60 m	2,503 m	157.39		0 m	60 m
34R	197 ft	8,210 ft	329.62	ASPHALT	0 ft	0 ft
	60 m	2,503 m	337.40		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	DME	ITM	110.70 MHz	18 nm	-	-	145 ft
				33 km	-		145 m
16R	DME	IKF	111.50 MHz	18 nm	-	-	145 ft
				33 km	-		145 m
34L	DME	IYQ	111.90 MHz	18 nm	-	-	153 ft
				33 km	-		153 m
34R	DME	ITJ	110.90 MHz	18 nm	-	-	148 ft
				33 km	-		148 m
16L	LOC-ILS	ITM	110.70 MHz	18 nm	149.64	-	135 ft
				33 km	157.42		135 m
16R	LOC-ILS	IKF	111.50 MHz	18 nm	149.62	-	135 ft
				33 km	157.40		135 m
34L	LOC-ILS	IYQ	111.90 MHz	18 nm	329.62	-	135 ft
				33 km	337.40		135 m
34R	LOC-ILS	ITJ	110.90 MHz	18 nm	329.64	-	135 ft
				33 km	337.42		135 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	GS	ITM	110.70 MHz	10 nm	149.64	3.00	135 ft
				19 km	157.42		135 m
16R	GS	IKF	111.50 MHz	10 nm	149.62	3.00	135 ft
				19 km	157.40		135 m
34L	GS	IYQ	111.90 MHz	10 nm	329.62	3.00	135 ft
				19 km	337.40		135 m
34R	GS	ITJ	110.90 MHz	10 nm	329.64	3.00	135 ft
				19 km	337.42		135 m

RJ00

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 39 ft / 12 m
Location: 34.785600 135.438000
Magnetic Var: 8.110 W

METAR

RJ00 062115Z AUTO 06003KT 020V100 4800 -RA BR FEW010 SCT019 BKN050 18/17 Q1008 RMK A2979

TAF

TAF RJ00 061706Z 0618/0800 07006KT 7000 -SHRA FEW008 SCT015 BKN020 TEMPO 0618/0623 3000 SHRA BR FEW003 BKN008 BKN0

Frequencies

CLD - 118.80 MHz - OSAKA DELIVERY
TWR - 118.10 MHz - OSAKA TOWER
APP - 120.45 MHz - KANSAI APPROACH
GND - 121.70 MHz - OSAKA GROUND
DEP - 119.50 MHz - KANSAI DEPARTURE
REC - 128.60 MHz - OSAKA ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14R	200 ft	9,846 ft	135.14	ASPHALT	128 ft	213 ft
	61 m	3,001 m	143.25		39 m	65 m
32L	200 ft	9,846 ft	315.15	ASPHALT	125 ft	249 ft
	61 m	3,001 m	323.26		38 m	76 m
14L	143 ft	5,995 ft	135.18	ASPHALT	128 ft	679 ft
	44 m	1,827 m	143.28		39 m	207 m
32R	143 ft	5,995 ft	315.18	ASPHALT	118 ft	571 ft
	44 m	1,827 m	323.29		36 m	174 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
32L	LOC-ILS	ISK	110.10 MHz	18 nm	315.13	-	50 ft
				33 km	323.24		50 m
32L	GS	ISK	110.10 MHz	10 nm	315.28	3.00	54 ft
				19 km	323.39		54 m