


2024/05/21 0014Z

RCTP LUCAS RCNN

139.67 nm / 258.66 km

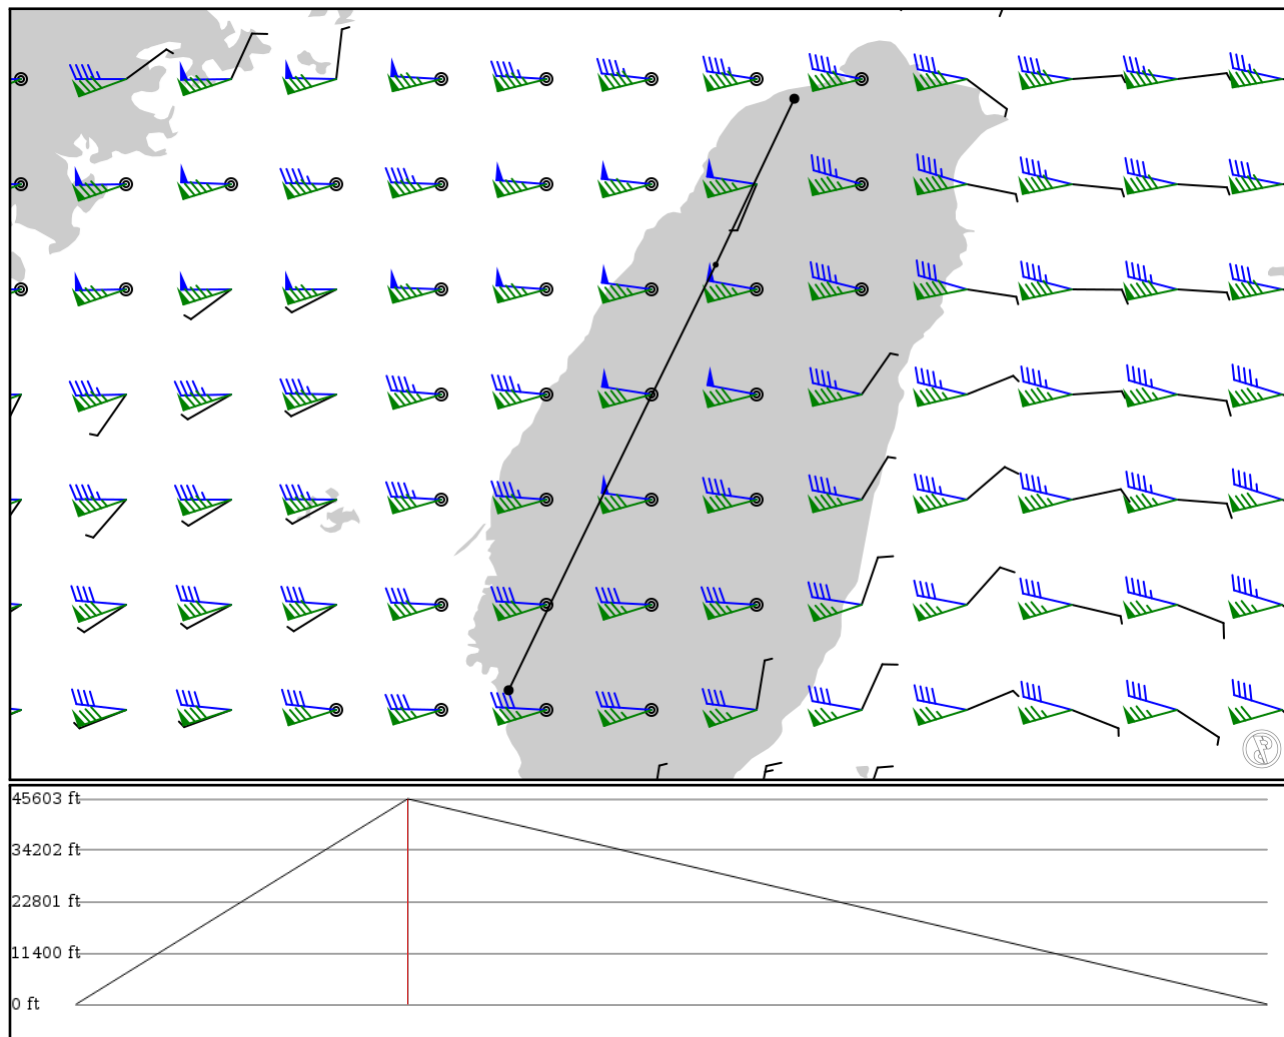

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RCTP	-	25.07790	0 ft	-	Taiwan Taoyuan Intl
APT	-	121.23400	0 m		
LUCAS	-	24.48080	13,900 ft	39	-
FIX	-	120.95100	4,237 m		
RCNN	-	22.95040	0 ft	100	Tainan
APT	-	120.20600	0 m		

RCTP

Region: REPUBLIC OF CHINA (TAIWAN)
Timezone: ASIA/TAIPEI
Runways: 2

Elevation: 108 ft / 33 m
Location: 25.077900 121.234000
Magnetic Var: 4.993 W

METAR

RCTP 210000Z 36004KT 320V020 9999 -RA FEW008 BKN012 BKN016 26/26 Q1011 NOSIG RMK A2986 RA AMT 0.4MM

TAF

TAF RCTP 202300Z 2100/2206 03010KT 9999 FEW015 BKN032 TEMPO 2100/2106 33005KT 4000 SHRA FEW010 BKN013 FEW015CB TEM

Frequencies

REC - 127.60 MHz - ATIS
TWR - 118.70 MHz - TAIPEI TOWER
GND - 121.60 MHz - TAIPEI GROUND
APP - 119.50 MHz - TAIPEI APPROACH
APP - 119.70 MHz - TAIPEI APPROACH
APP - 123.60 MHz - TAIPEI APPROACH
APP - 125.10 MHz - TAIPEI APPROACH
APP - 125.60 MHz - TAIPEI APPROACH

TWR - 129.30 MHz - TAIPEI TOWER
GND - 121.70 MHz - TAIPEI GROUND
CLD - 121.80 MHz - TAIPEI CLEARANCE DELIVERY
APP - 119.60 MHz - TAIPEI APPROACH
APP - 123.50 MHz - TAIPEI APPROACH
APP - 124.20 MHz - TAIPEI APPROACH
APP - 125.50 MHz - TAIPEI APPROACH
APP - 128.50 MHz - TAIPEI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05L	197 ft	12,020 ft	49.01	ASPHALT	0 ft	420 ft
	60 m	3,664 m	54.00		0 m	128 m
23R	197 ft	12,020 ft	229.02	ASPHALT	0 ft	390 ft
	60 m	3,664 m	234.02		0 m	119 m
05R	197 ft	12,478 ft	49.01	ASPHALT	328 ft	404 ft
	60 m	3,803 m	54.00		100 m	123 m
23L	197 ft	12,478 ft	229.02	ASPHALT	1,148 ft	394 ft
	60 m	3,803 m	234.01		350 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	ITIA	111.10 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05R	DME	ICKS	110.70 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23R	DME	ITYA	109.30 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23L	DME	ICJN	111.90 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05L	LOC-ILS	ITIA	111.10 MHz	18 nm	49.02	-	108 ft
				33 km	54.01		108 m
05R	LOC-ILS	ICKS	110.70 MHz	18 nm	49.02	-	108 ft
				33 km	54.01		108 m
23L	LOC-ILS	ICJN	111.90 MHz	18 nm	229.02	-	108 ft
				33 km	234.01		108 m
23R	LOC-ILS	ITYA	109.30 MHz	18 nm	229.02	-	108 ft
				33 km	234.01		108 m
05L	GS	ITIA	111.10 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.01		108 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	GS	ICKS	110.70 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.01		108 m
23L	GS	ICJN	111.90 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.01		108 m
23R	GS	ITYA	109.30 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.01		108 m

RCNN

Region: REPUBLIC OF CHINA (TAIWAN)
Timezone: ASIA/TAIPEI
Runways: 2

Elevation: 62 ft / 19 m
Location: 22.950400 120.206000
Magnetic Var: 4.396 W

METAR

RCNN 210000Z 08004KT 8000 -RA FEW010 BKN050 26/23 Q1010 NOSIG RMK A2985

TAF

TAF RCNN 202300Z 2100/2124 09004KT 5000 -RA BR FEW010 SCT021 BKN050 TX28/2105Z TN23/2121Z BECMG 2101/2104 24006KT

Frequencies

GND - 121.60 MHz - TAINAN GROUND	TWR - 118.40 MHz - TAINAN TOWER
APP - 124.70 MHz - KAOHSIUNG APPROACH	APP - 125.70 MHz - KAOHSIUNG APPROACH
APP - 120.60 MHz - KAOHSIUNG APPROACH	APP - 121.10 MHz - KAOHSIUNG APPROACH
APP - 128.10 MHz - KAOHSIUNG APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18L	148 ft	10,042 ft	178.72	CONCRETE	0 ft	902 ft
	45 m	3,061 m	183.11		0 m	275 m
36R	148 ft	10,042 ft	358.71	CONCRETE	0 ft	892 ft
	45 m	3,061 m	3.11		0 m	272 m
18R	148 ft	10,055 ft	178.73	CONCRETE	0 ft	489 ft
	45 m	3,065 m	183.12		0 m	149 m
36L	148 ft	10,055 ft	358.73	CONCRETE	0 ft	755 ft
	45 m	3,065 m	3.12		0 m	230 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36R	DME	ITNN	110.10 MHz	18 nm	-	-	63 ft
				33 km	-		63 m
36R	LOC-ILS	ITNN	110.10 MHz	18 nm	358.72	-	62 ft
				33 km	3.12		62 m
18L	LOC-ILS	ITNA	111.10 MHz	18 nm	178.72	-	62 ft
				33 km	183.12		62 m
36R	GS	ITNN	110.10 MHz	10 nm	358.72	3.00	62 ft
				19 km	3.12		62 m
18L	GS	ITNA	111.10 MHz	10 nm	178.72	3.00	62 ft
				19 km	183.12		62 m