

# KMIE

Delaware County Regional


# KLAX

Los Angeles Intl

2024/06/01 0810Z

KMIE DNV **Q42** IRK **J96** SLN **J102** ALS **J110** RSK **J64** TBC **J128** PGS **J64** HEC **V442** APLES KLAX

1621.61 nm / 3003.23 km

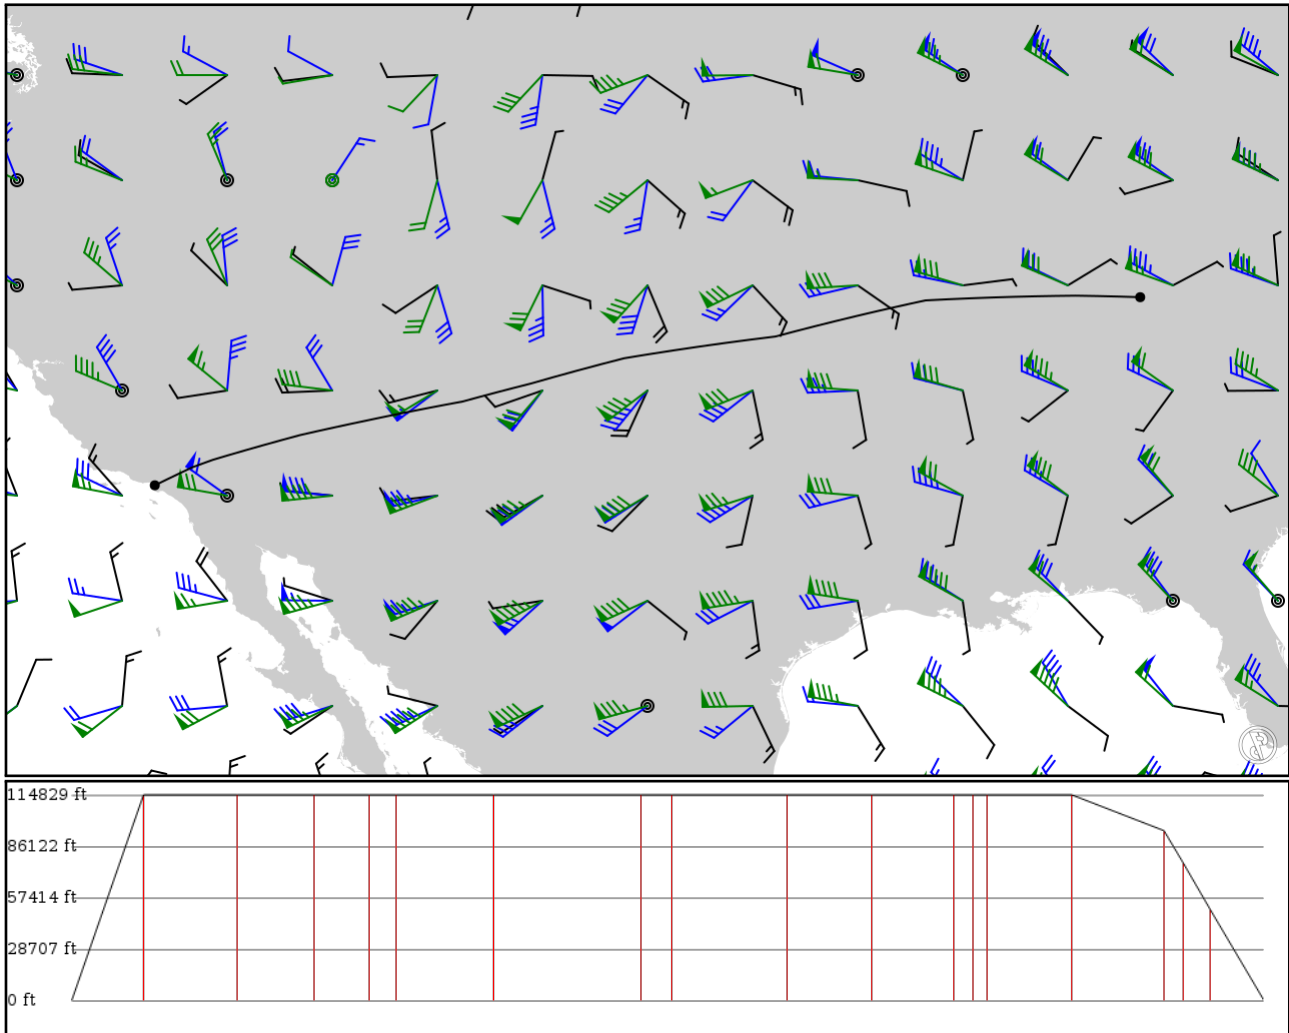

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMIE APT	-	40.24250 -85.39550	0 ft 0 m	-	Delaware County Regional
DNV VOR	-	40.29380 -87.55730	35,000 ft 10,668 m	99	DANVILLE
STRUK FIX	Q42 AWY-HI	40.23430 -90.30600	35,000 ft 10,668 m	126	-
IRK VOR	Q42 AWY-HI	40.13500 -92.59170	35,000 ft 10,668 m	105	KIRKSVILLE
KIDER FIX	J96 AWY-HI	39.78170 -94.17830	35,000 ft 10,668 m	76	-
AGENT FIX	J96 AWY-HI	39.61080 -94.90570	35,000 ft 10,668 m	35	-
SLN VOR	J96 AWY-HI	38.92510 -97.62130	35,000 ft 10,668 m	132	SALINA
RYLIE FIX	J102 AWY-HI	38.33730 -101.82700	35,000 ft 10,668 m	200	-
LAA VOR	J102 AWY-HI	38.19710 -102.68800	35,000 ft 10,668 m	41	LAMAR
ALS VOR	J102 AWY-HI	37.34920 -105.81600	35,000 ft 10,668 m	156	ALAMOSA
RSK VOR	J110 AWY-HI	36.74840 -108.09900	35,000 ft 10,668 m	115	RATTLESNAKE (FARMINGTON)
COCAN FIX	J64 AWY-HI	36.31250 -110.35200	35,000 ft 10,668 m	111	-
RHYSS FIX	J64 AWY-HI	36.20530 -110.87100	35,000 ft 10,668 m	25	-
TBC VOR	J64 AWY-HI	36.12130 -111.27000	35,000 ft 10,668 m	19	TUBA CITY
PGS VOR	J128 AWY-HI	35.62470 -113.54400	35,000 ft 10,668 m	114	PEACH SPRINGS
GLACO FIX	J64 AWY-HI	34.94450 -115.96800	28,900 ft 8,809 m	125	-
HEC VOR	J64 AWY-HI	34.79700 -116.46300	23,400 ft 7,132 m	25	HECTOR
APLES FIX	V442 AWY-LO	34.54850 -117.14900	15,500 ft 4,724 m	37	-
KLAX APT	-	33.94310 -118.40900	0 ft 0 m	72	Los Angeles Intl

## KMIE

Region: UNITED STATES  
Timezone: AMERICA/INDIANA/INDIANAPOLIS  
Runways: 2

Elevation: 937 ft / 286 m  
Location: 40.242500 -85.395500  
Magnetic Var: 5.747 W

## METAR

KMIE 010753Z AUTO 14003KT 10SM CLR 15/07 A3015 RMK A02 SLP201 T01500067

## TAF

UNKNOWN

## Frequencies

REC - 133.25 MHz - ATIS  
COM - 122.95 MHz - UNICOM  
TWR - 120.10 MHz - MUNCIE TWR

COM - 120.10 MHz - CTAF  
GND - 121.90 MHz - MUNCIE GND

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14	150 ft	6,498 ft	136.22	ASPHALT	0 ft	0 ft
	46 m	1,981 m	141.97		0 m	0 m
32	150 ft	6,498 ft	316.23	ASPHALT	0 ft	194 ft
	46 m	1,981 m	321.98		0 m	59 m
03	100 ft	5,203 ft	21.75	ASPHALT	0 ft	0 ft
	30 m	1,586 m	27.49		0 m	0 m
21	100 ft	5,203 ft	201.75	ASPHALT	0 ft	203 ft
	30 m	1,586 m	207.50		0 m	62 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
32	LOC-ILS	IJNK	109.10 MHz	18 nm	316.22	-	937 ft
				33 km	321.97		937 m
32	GS	IJNK	109.10 MHz	10 nm	316.22	3.00	937 ft
				19 km	321.97		937 m

## KLAX

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 4

Elevation: 125 ft / 38 m  
Location: 33.943100 -118.409000  
Magnetic Var: 11.436 E

## METAR

KLAX 010753Z 30005KT 9SM FEW008 OVC011 16/13 A2991 RMK AO2 SLP125 T01560128 401940144

## TAF

KLAX 010551Z 0106/0212 24006KT P6SM OVC012 FM011700 25008KT P6SM OVC015 FM012000 26012KT P6SM FEW015 FM020100 270

## Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.52		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.53		0 m	87 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m