


2024/05/02 2233Z

KJSO ROMER **V569** BPT SBI **A766** KEHLI **UA766** ITLOM **UM782** ALSEG MMUN

796.50 nm / 1475.12 km

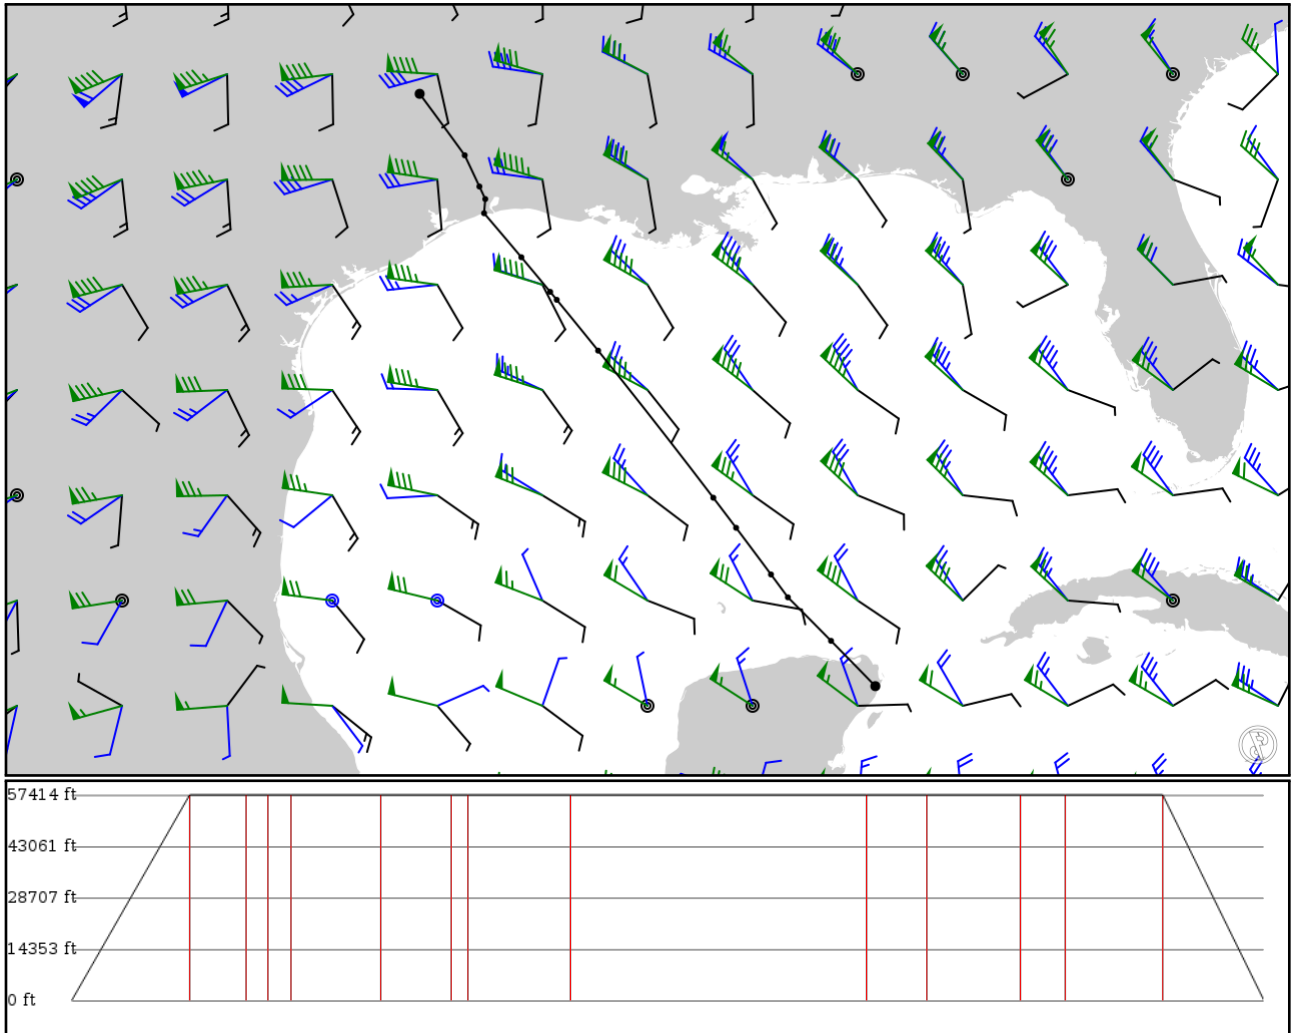

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 130kts
- Cruise Altitude: 17500ft
- Cruise Speed: 200kts
- Descent Rate: 2000ft/min
- Descent Speed: 150kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KJSO APT	-	31.86930 -95.21740	0 ft 0 m	-	CHEROKEE CO
ROMER FIX	-	30.74650 -94.39250	17,500 ft 5,334 m	79	-
SILBE FIX	V569 AWY-LO	30.17540 -94.12340	17,500 ft 5,334 m	37	-
BPT VOR	V569 AWY-LO	29.94610 -94.01620	17,500 ft 5,334 m	14	BEAUMONT
SBI VOR	-	29.68670 -94.03800	17,500 ft 5,334 m	15	SABINE PASS
LAURL FIX	A766 AWY-HI	28.88250 -93.35520	17,500 ft 5,334 m	60	-
KLAMS FIX	A766 AWY-HI	28.25000 -92.82760	17,500 ft 5,334 m	47	-
KENGs FIX	A766 AWY-HI	28.10430 -92.70720	17,500 ft 5,334 m	10	-
KELPP FIX	A766 AWY-HI	27.17560 -91.94930	17,500 ft 5,334 m	68	-
KEHLI FIX	A766 AWY-HI	24.48610 -89.84030	17,500 ft 5,334 m	197	-
SUVUM FIX	UA766 AWY-HI	23.93610 -89.42280	17,500 ft 5,334 m	40	-
LEVAT FIX	UA766 AWY-HI	23.08360 -88.78390	17,500 ft 5,334 m	62	-
ITLOM FIX	UA766 AWY-HI	22.66610 -88.47470	17,500 ft 5,334 m	30	-
ALSEG FIX	UM782 AWY-HI	21.87000 -87.68420	17,500 ft 5,334 m	64	-
MMUN APT	-	21.04210 -86.87350	0 ft 0 m	67	Cancun Intl

MMUN

Region: MEXICO
Timezone: AMERICA/CANCUN
Runways: 2

Elevation: 22 ft / 7 m
Location: 21.042100 -86.873500
Magnetic Var: 2.717 W

METAR

MMUN 022141Z 14014KT 7SM FEW015 30/22 A2980 RMK 8/100 FU W

TAF

TAF MMUN 021710Z 0218/0318 14018KT P6SM SCT015 TX31/0218Z TN24/0310Z FM030300 00000KT P6SM SKC FM031500 12015KT P

Frequencies

REC - 127.70 MHz - ATIS	REC - 122.30 MHz - CANCUN INFO
GND - 121.00 MHz - CANCUN GROUND	GND - 121.70 MHz - CANCUN GROUND
TWR - 118.10 MHz - CANCUN TOWER	TWR - 118.60 MHz - CANCUN TOWER
CLD - 122.10 MHz - CLEARANCE DELIVERY	APP - 124.70 MHz - CANCUN APPROACH
APP - 123.20 MHz - CANCUN ARRIVAL	DEP - 124.20 MHz - CANCUN DEPARTURE
DEP - 123.50 MHz - CANCUN DEPARTURE	GND - 130.50 MHz - GENERAL AVIATION RAMP CONTROL
APP - 125.20 MHz - MERIDA CONTROL	APP - 125.80 MHz - MERIDA CONTROL
APP - 128.00 MHz - MERIDA CONTROL	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	190 ft	11,550 ft	123.85	ASPHALT	0 ft	476 ft
	58 m	3,520 m	126.56		0 m	145 m
30L	190 ft	11,550 ft	303.86	ASPHALT	0 ft	443 ft
	58 m	3,520 m	306.57		0 m	135 m
12L	148 ft	9,189 ft	123.84	ASPHALT	0 ft	72 ft
	45 m	2,801 m	126.55		0 m	22 m
30R	148 ft	9,189 ft	303.84	ASPHALT	0 ft	98 ft
	45 m	2,801 m	306.56		0 m	30 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	INCP	110.70 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
12R	DME	ICUN	111.10 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
12L	LOC-ILS	INCP	110.70 MHz	18 nm	123.84	-	21 ft
				33 km	126.56		21 m
12R	LOC-ILS	ICUN	111.10 MHz	18 nm	123.85	-	21 ft
				33 km	126.57		21 m
12L	GS	INCP	110.70 MHz	10 nm	123.84	3.00	21 ft
				19 km	126.56		21 m
12R	GS	ICUN	111.10 MHz	10 nm	123.85	3.00	21 ft
				19 km	126.57		21 m