


2024/05/16 0549Z

RJTY HORAI **Y50** KOZUN RJBB

218.51 nm / 404.68 km

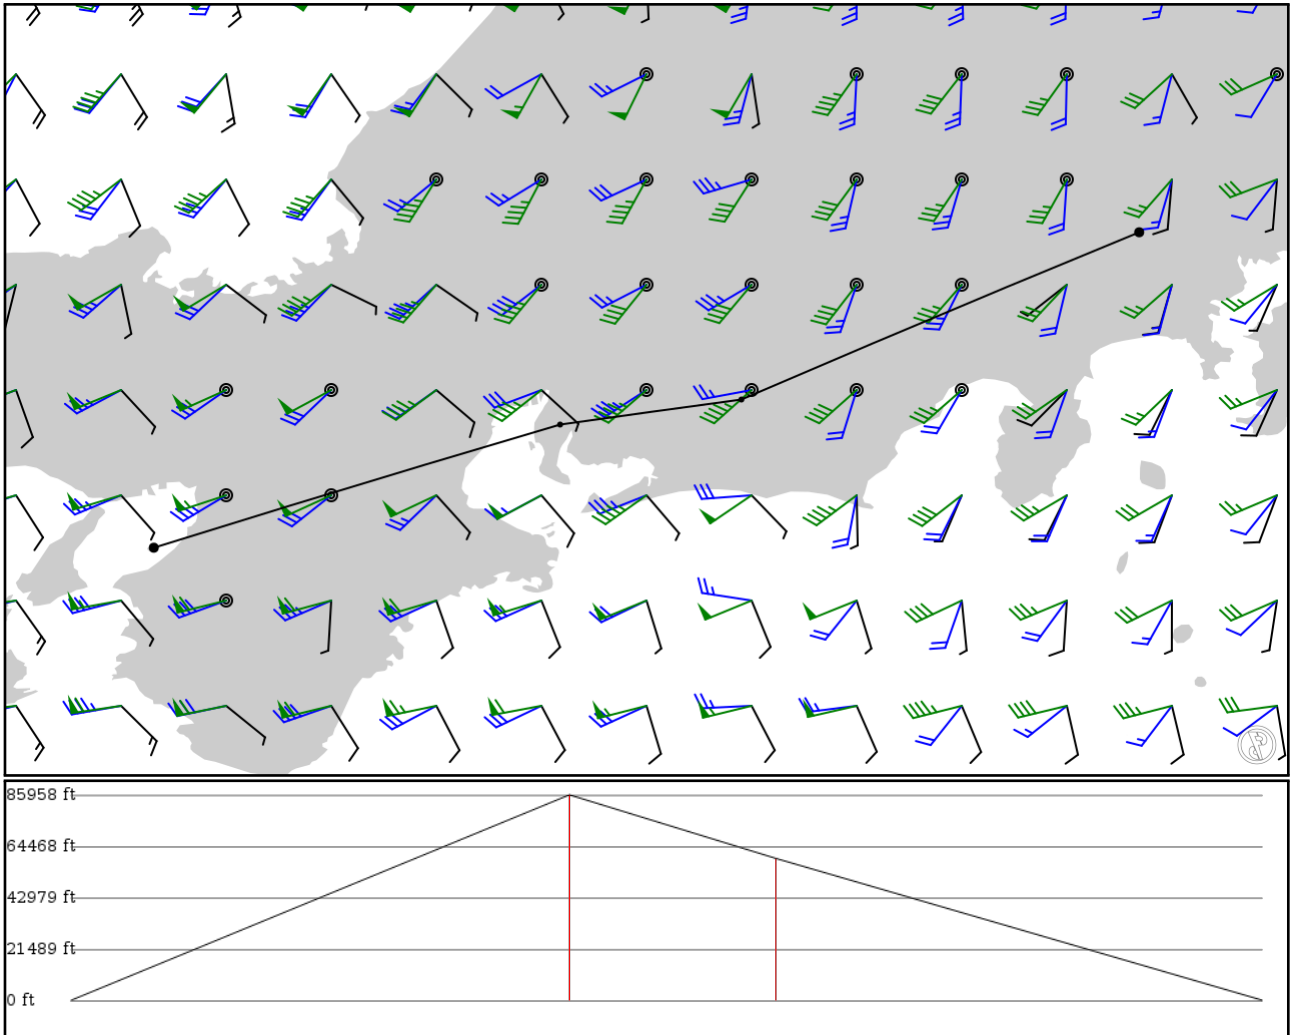

Notes

Basic altitude profile:

- Ascent Rate: 1200ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 37000ft
- Cruise Speed: 420kts
- Descent Rate: 1200ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJTY	-	35.74849	0 ft	-	YOKOTA AB
APT	-	139.34848	0 m		
HORAI	-	35.05129	26,200 ft	91	-
FIX	-	137.68721	7,986 m		
KOZUN	Y50	34.94699	18,100 ft	37	-
FIX	AWY-LO	136.93033	5,517 m		
RJBB	-	34.43362	0 ft	89	KANSAI INTL
APT	-	135.23360	0 m		

RJTY

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 1

Elevation: 459 ft / 140 m
Location: 35.748500 139.348000
Magnetic Var: 7.939 W

METAR

RJTY 160455Z 19019G23KT 10SM FEW020 SCT250 24/17 A2961 RMK A02A SLP028 T02390167 \$

TAF

TAF AMD RJTY 152235Z 1522/1703 35007KT 4800 BR BKN006 OVC012 QNH2969INS TEMPO 1523/1602 8000 BR SCT006 BKN012 OVC0

Frequencies

REC - 128.40 MHz - ATIS
TWR - 134.30 MHz -
DEP - 122.10 MHz -
GND - 133.20 MHz -
APP - 118.30 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	200 ft	11,028 ft	170.34	CONCRETE	0 ft	1,001 ft
	61 m	3,361 m	178.28		0 m	305 m
36	200 ft	11,028 ft	350.34	CONCRETE	0 ft	1,001 ft
	61 m	3,361 m	358.28		0 m	305 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18	LOC-ILS	YAS	108.70 MHz	18 nm	170.33	-	408 ft
				33 km	178.27		408 m
36	LOC-ILS	IYOK	109.70 MHz	18 nm	350.33	-	462 ft
				33 km	358.27		462 m
18	GS	YAS	108.70 MHz	10 nm	170.67	3.00	452 ft
				19 km	178.61		452 m
36	GS	IYOK	109.70 MHz	10 nm	350.67	2.50	421 ft
				19 km	358.61		421 m

RJBB

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 17 ft / 5 m
Location: 34.433600 135.234000
Magnetic Var: 8.020 W

METAR

RJBB 160530Z 27022KT 9999 FEW020 18/11 Q1006 TEMPO 26023G34KT

TAF

TAF RJBB 152307Z 1600/1706 26022KT 9999 FEW015 BKN040 TEMPO 1600/1609 26025G36KT BECMG 1618/1621 24010KT

Frequencies

APP - 120.25 MHz - KANSAI APPROACH	APP - 120.45 MHz - KANSAI APPROACH
APP - 125.50 MHz - KANSAI APPROACH	APP - 124.70 MHz - KANSAI APPROACH
APP - 121.15 MHz - KANSAI APPROACH	APP - 120.85 MHz - KANSAI APPROACH
APP - 125.00 MHz - KANSAI APPROACH	APP - 124.80 MHz - KANSAI APPROACH
APP - 121.20 MHz - KANSAI APPROACH	APP - 120.40 MHz - KANSAI APPROACH
DEP - 119.20 MHz - KANSAI DEPARTURE	DEP - 120.65 MHz - KANSAI DEPARTURE
DEP - 119.50 MHz - KANSAI DEPARTURE	DEP - 119.75 MHz - KANSAI DEPARTURE
TWR - 118.20 MHz - KANSAI TOWER	TWR - 118.05 MHz - KANSAI TOWER
TWR - 126.20 MHz - KANSAI TOWER	GND - 121.60 MHz - KANSAI GROUND
GND - 121.65 MHz - KANSAI GROUND	CLD - 121.90 MHz - KANSAI DELIVERY
REC - 127.85 MHz - ATIS	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	13,135 ft	50.85	ASPHALT	0 ft	187 ft
	60 m	4,004 m	58.87		0 m	57 m
24R	197 ft	13,135 ft	230.87	ASPHALT	0 ft	184 ft
	60 m	4,004 m	238.89		0 m	56 m
06R	197 ft	11,493 ft	50.87	ASPHALT	0 ft	187 ft
	60 m	3,503 m	58.89		0 m	57 m
24L	197 ft	11,493 ft	230.88	ASPHALT	0 ft	180 ft
	60 m	3,503 m	238.90		0 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	DME	IKD	108.10 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
24L	DME	IKN	110.70 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
06L	LOC-ILS	IKJ	108.70 MHz	18 nm	50.86	-	17 ft
				33 km	58.88		17 m
06R	LOC-ILS	IKD	108.10 MHz	18 nm	50.88	-	17 ft
				33 km	58.90		17 m
24L	LOC-ILS	IKN	110.70 MHz	18 nm	230.88	-	17 ft
				33 km	238.90		17 m
24R	LOC-ILS	IKW	108.50 MHz	18 nm	230.86	-	17 ft
				33 km	238.88		17 m
06L	GS	IKJ	108.70 MHz	10 nm	50.86	3.00	17 ft
				19 km	58.88		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	GS	IKD	108.10 MHz	10 nm	50.88	3.00	17 ft
				19 km	58.90		17 m
24L	GS	IKN	110.70 MHz	10 nm	230.88	3.00	17 ft
				19 km	238.90		17 m
24R	GS	IKW	108.50 MHz	10 nm	230.86	3.00	17 ft
				19 km	238.88		17 m