

# RCTP

Taiwan Taoyuan Intl


# VHHH

Hong Kong Intl

2024/05/04 1754Z

RCTP OBKEL **M503** LAPUG **R200** OVGOT VHHH

456.79 nm / 845.98 km

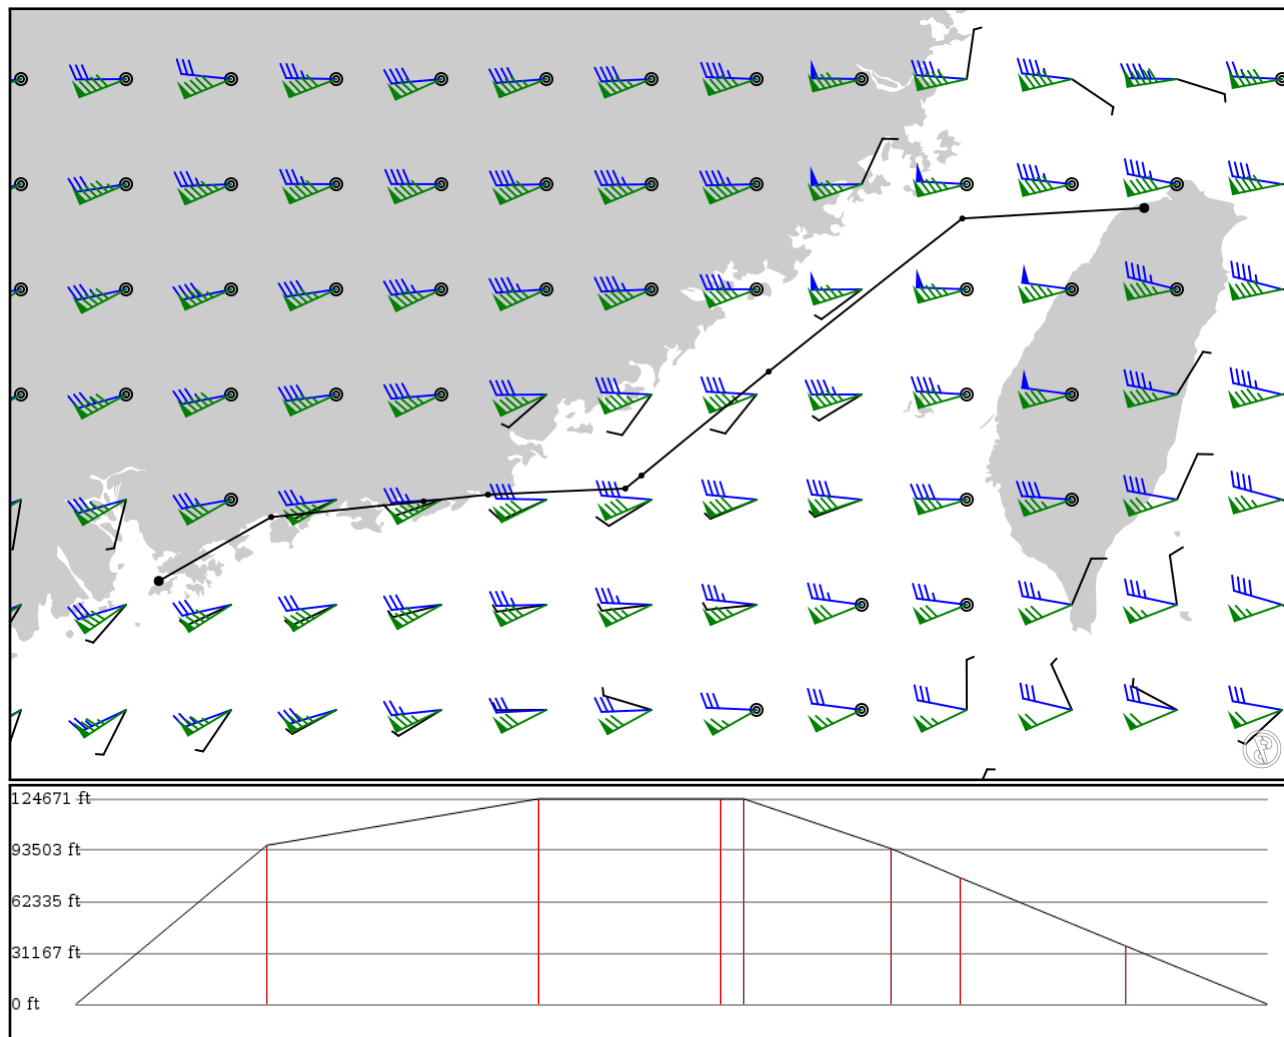

## Notes

Basic altitude profile:

- Ascent Rate: 3000ft/min
- Ascent Speed: 230kts
- Cruise Altitude: 38000ft
- Cruise Speed: 450kts
- Descent Rate: 1500ft/min
- Descent Speed: 240kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RCTP	-	25.07790	0 ft	-	Taiwan Taoyuan Intl
APT	-	121.23400	0 m	-	
OBKEL	-	25.00000	29,400 ft	73	-
FIX	-	119.88300	8,961 m	-	-
APAKA	M503	23.86330	38,000 ft	104	-
FIX	AWY-HI	118.44500	11,582 m	-	-
TOLAK	M503	23.09170	38,000 ft	69	-
FIX	AWY-HI	117.50000	11,582 m	-	-
LAPUG	M503	22.99500	38,000 ft	8	-
FIX	AWY-HI	117.38000	11,582 m	-	-
BEBEM	R200	22.95000	28,800 ft	56	-
FIX	AWY-HI	116.36000	8,778 m	-	-
SUMDO	R200	22.90000	23,400 ft	26	-
FIX	AWY-HI	115.88200	7,132 m	-	-
OVGOT	R200	22.78330	10,800 ft	63	-
FIX	AWY-HI	114.75000	3,292 m	-	-
VHHH	-	22.30890	0 ft	54	Hong Kong Intl
APT	-	113.91500	0 m	-	

## RCTP

Region: REPUBLIC OF CHINA (TAIWAN)  
Timezone: ASIA/TAIPEI  
Runways: 2

Elevation: 108 ft / 33 m  
Location: 25.077900 121.234000  
Magnetic Var: 4.989 W

## METAR

RCTP 041700Z VRB02KT 8000 FEW015 BKN080 24/24 Q1009 NOSIG RMK A2981

## TAF

TAF RCTP 041100Z 0412/0518 23005KT 9999 FEW006 BKN011 TEMPO 0414/0420 4000 BR FEW005 BKN008 TEMPO 0420/0502 2200 B

## Frequencies

REC - 127.60 MHz - ATIS	TWR - 129.30 MHz - TAIPEI TOWER
TWR - 118.70 MHz - TAIPEI TOWER	GND - 121.70 MHz - TAIPEI GROUND
GND - 121.60 MHz - TAIPEI GROUND	CLD - 121.80 MHz - TAIPEI CLEARANCE DELIVERY
APP - 119.50 MHz - TAIPEI APPROACH	APP - 119.60 MHz - TAIPEI APPROACH
APP - 119.70 MHz - TAIPEI APPROACH	APP - 123.50 MHz - TAIPEI APPROACH
APP - 123.60 MHz - TAIPEI APPROACH	APP - 124.20 MHz - TAIPEI APPROACH
APP - 125.10 MHz - TAIPEI APPROACH	APP - 125.50 MHz - TAIPEI APPROACH
APP - 125.60 MHz - TAIPEI APPROACH	APP - 128.50 MHz - TAIPEI APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05L	197 ft	12,020 ft	49.01	ASPHALT	0 ft	420 ft
	60 m	3,664 m	54.00		0 m	128 m
23R	197 ft	12,020 ft	229.02	ASPHALT	0 ft	390 ft
	60 m	3,664 m	234.01		0 m	119 m
05R	197 ft	12,478 ft	49.01	ASPHALT	328 ft	404 ft
	60 m	3,803 m	54.00		100 m	123 m
23L	197 ft	12,478 ft	229.02	ASPHALT	1,148 ft	394 ft
	60 m	3,803 m	234.01		350 m	120 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	ITIA	111.10 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05R	DME	ICKS	110.70 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23R	DME	ITYA	109.30 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23L	DME	ICJN	111.90 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05L	LOC-ILS	ITIA	111.10 MHz	18 nm	49.02	-	108 ft
				33 km	54.01		108 m
05R	LOC-ILS	ICKS	110.70 MHz	18 nm	49.02	-	108 ft
				33 km	54.01		108 m
23L	LOC-ILS	ICJN	111.90 MHz	18 nm	229.02	-	108 ft
				33 km	234.01		108 m
23R	LOC-ILS	ITYA	109.30 MHz	18 nm	229.02	-	108 ft
				33 km	234.01		108 m
05L	GS	ITIA	111.10 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.01		108 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	GS	ICKS	110.70 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.01		108 m
23L	GS	ICJN	111.90 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.01		108 m
23R	GS	ITYA	109.30 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.01		108 m

## VHHH

Region: HONG KONG  
Timezone: UNKNOWN  
Runways: 2

Elevation: 27 ft / 8 m  
Location: 22.308900 113.915000  
Magnetic Var: 3.236 W

## METAR

VHHH 041730Z 06004KT 9999 FEW010 24/21 Q1008 NOSIG

## TAF

TAF VHHH 041400Z 0415/0521 12010KT 9999 FEW008 SCT020 TX29/0506Z TN23/0422Z TEMPO 0420/0503 VRB05KT BECMG 0503/05

## Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.02		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.02		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m