


2024/05/16 0856Z

RJTY SWING RJ00

200.88 nm / 372.04 km

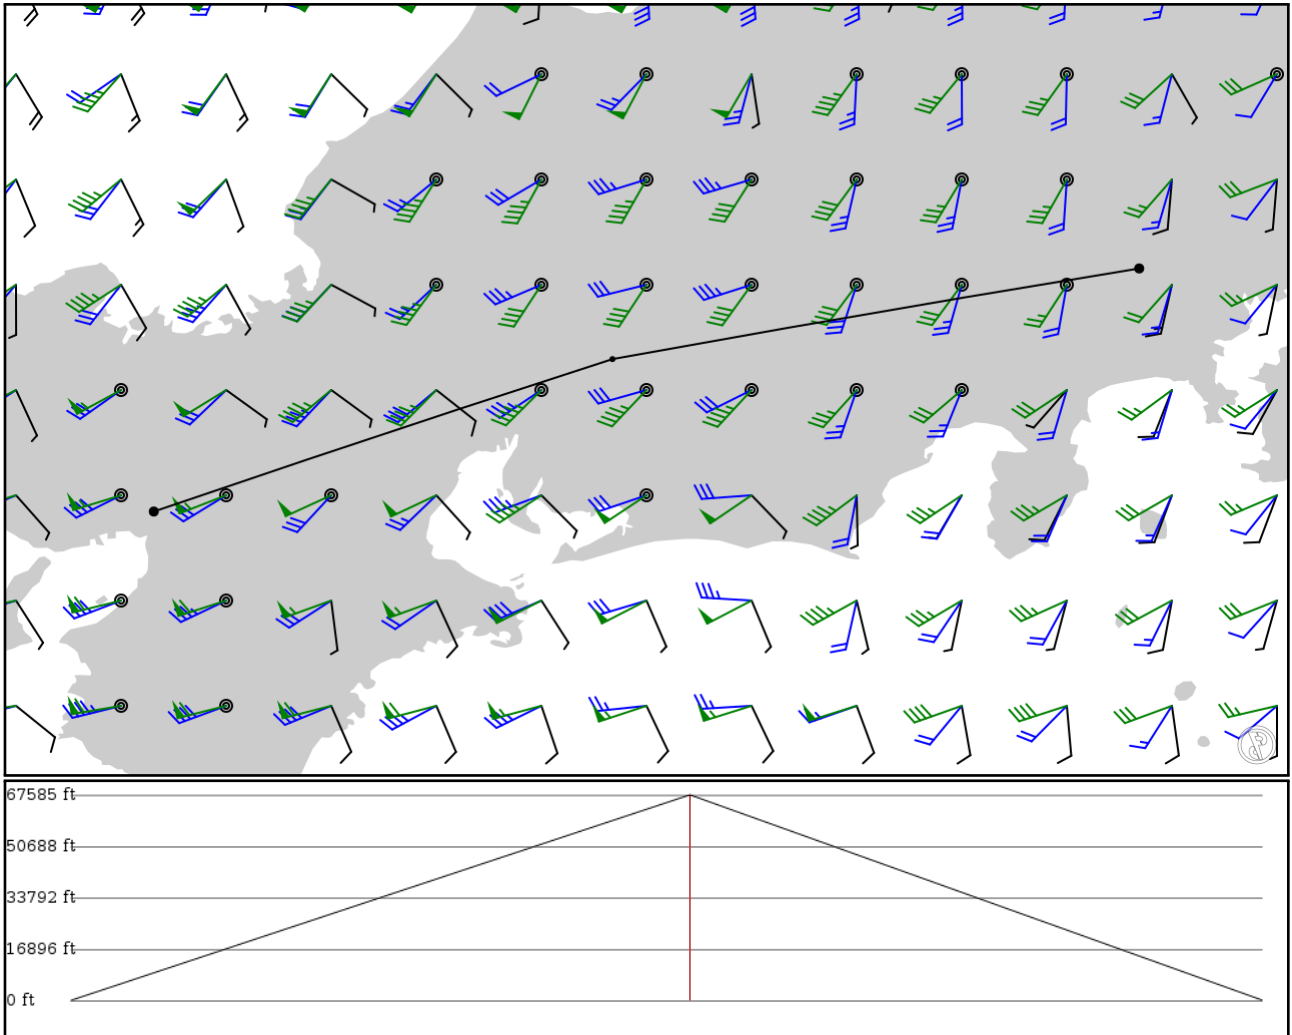

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJTY	-	35.74849	0 ft	-	YOKOTA AB
APT	-	139.34848	0 m		
SWING	-	35.38943	20,600 ft	104	-
FIX	-	137.25819	6,279 m		
RJ00	-	34.78560	0 ft	96	OSAKA INTL
APT	-	135.43802	0 m		

## RJTY

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 1

Elevation: 459 ft / 140 m  
Location: 35.748500 139.348000  
Magnetic Var: 7.939 W

## METAR

RJTY 160755Z 22021G27KT 10SM CLR 25/09 A2955 RMK A02A PK WND 23028/04 SLP008 T02500085 \$

## TAF

TAF TAF RJTY 160500Z 1605/1711 19015G25KT 9999 FEW02 SCT250 520109 QNH2955INS TEMPO 1607/1609 19025G35KT 530005 B

## Frequencies

REC - 128.40 MHz - ATIS  
TWR - 134.30 MHz -  
DEP - 122.10 MHz -  
GND - 133.20 MHz -  
APP - 118.30 MHz -

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	200 ft	11,028 ft	170.34	CONCRETE	0 ft	1,001 ft
	61 m	3,361 m	178.28		0 m	305 m
36	200 ft	11,028 ft	350.34	CONCRETE	0 ft	1,001 ft
	61 m	3,361 m	358.28		0 m	305 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18	LOC-ILS	YAS	108.70 MHz	18 nm	170.33	-	408 ft
				33 km	178.27		408 m
36	LOC-ILS	IYOK	109.70 MHz	18 nm	350.33	-	462 ft
				33 km	358.27		462 m
18	GS	YAS	108.70 MHz	10 nm	170.67	3.00	452 ft
				19 km	178.61		452 m
36	GS	IYOK	109.70 MHz	10 nm	350.67	2.50	421 ft
				19 km	358.61		421 m

## RJ00

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 2

Elevation: 39 ft / 12 m  
Location: 34.785600 135.438000  
Magnetic Var: 8.111 W

## METAR

RJ00 160800Z 26012KT 220V300 9999 FEW025 19/07 Q1007 RMK 1CU025 A2974

## TAF

TAF RJ00 160505Z 1606/1712 26012KT 9999 FEW030 TEMPO 1606/1607 26016G27KT BECMG 1700/1703 21009KT BECMG 1706/1709

## Frequencies

CLD - 118.80 MHz - OSAKA DELIVERY  
TWR - 118.10 MHz - OSAKA TOWER  
APP - 120.45 MHz - KANSAI APPROACH  
GND - 121.70 MHz - OSAKA GROUND  
DEP - 119.50 MHz - KANSAI DEPARTURE  
REC - 128.60 MHz - OSAKA ATIS

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14R	200 ft	9,846 ft	135.14	ASPHALT	128 ft	213 ft
	61 m	3,001 m	143.25		39 m	65 m
32L	200 ft	9,846 ft	315.15	ASPHALT	125 ft	249 ft
	61 m	3,001 m	323.26		38 m	76 m
14L	143 ft	5,995 ft	135.18	ASPHALT	128 ft	679 ft
	44 m	1,827 m	143.29		39 m	207 m
32R	143 ft	5,995 ft	315.18	ASPHALT	118 ft	571 ft
	44 m	1,827 m	323.29		36 m	174 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
32L	LOC-ILS	ISK	110.10 MHz	18 nm	315.13	-	50 ft
				33 km	323.24		50 m
32L	GS	ISK	110.10 MHz	10 nm	315.28	3.00	54 ft
				19 km	323.39		54 m