

LGIR

Iraklion - Nikos Kazantzakis


LTAI

Antalya Intl

2024/05/09 0239Z

LGIR TIPAS **UV57** RDS **UN136** DAL LTAI

291.14 nm / 539.19 km

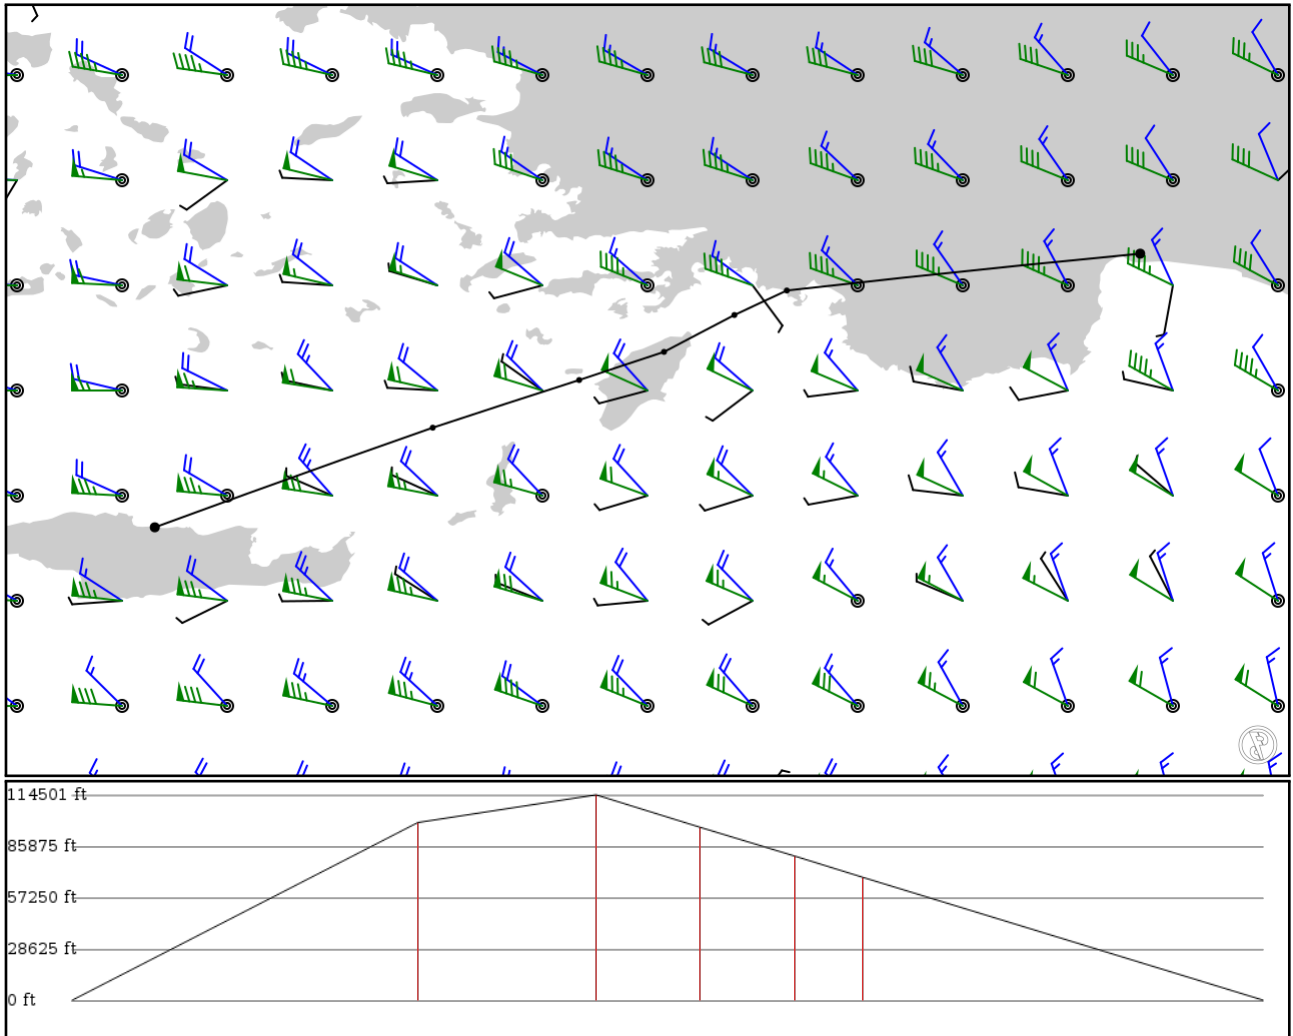

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LGIR APT	-	35.33990 25.17820	0 ft 0 m	-	Iraklion - Nikos Kazantzakis
TIPAS FIX	-	35.90780 26.76330	30,200 ft 9,205 m	84	-
LOKNA FIX	UV57 AWY-HI	36.17940 27.59830	34,900 ft 10,638 m	43	-
RDS VOR	UV57 AWY-HI	36.33990 28.08210	29,400 ft 8,961 m	25	RODOS
SOTIV FIX	UN136 AWY-HI	36.55000 28.48330	24,500 ft 7,468 m	23	-
DAL VOR	UN136 AWY-HI	36.68970 28.78230	20,900 ft 6,370 m	16	DALAMAN
LTAI APT	-	36.89960 30.79750	0 ft 0 m	97	Antalya Intl

LTAI

Region: TURKEY
Timezone: EUROPE/ISTANBUL
Runways: 3

Elevation: 175 ft / 53 m
Location: 36.899600 30.797500
Magnetic Var: 5.664 E

METAR

LTAI 090150Z 34006KT CAVOK 16/10 Q1013 NOSIG RMK RWY18C 33005KT RWY36R 35005KT RWY18L 35003KT

TAF

TAF LTAI 082240Z 0900/0924 34006KT CAVOK BECMG 0903/0906 FEW030 BKN160 BECMG 0906/0909 16010KT BECMG 0915/0918 34

Frequencies

CLD - 120.20 MHz - ANTALYA DELIVERY	TWR - 121.65 MHz - ANTALYA DELIVERY
REC - 136.12 MHz - ANTALYA ATIS	REC - 118.27 MHz - ANTALYA ATIS
APP - 119.02 MHz - ANTALYA APPROACH	APP - 124.35 MHz - ANTALYA APPROACH
APP - 124.42 MHz - ANTALYA APPROACH	TWR - 125.00 MHz - ANTALYA TOWER
TWR - 119.80 MHz - ANTALYA TOWER	TWR - 120.12 MHz - ANTALYA TOWER
TWR - 126.10 MHz - ANTALYA TOWER	GND - 119.85 MHz - ANTALYA GROUND
GND - 121.75 MHz - ANTALYA GROUND	GND - 121.70 MHz - ANTALYA GROUND
GND - 121.90 MHz - ANTALYA GROUND	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18L	148 ft	11,165 ft	186.29	CONCRETE	0 ft	197 ft
	45 m	3,403 m	180.63		0 m	60 m
36R	148 ft	11,165 ft	6.29	CONCRETE	0 ft	197 ft
	45 m	3,403 m	0.62		0 m	60 m
18C	148 ft	11,165 ft	186.25	CONCRETE	0 ft	197 ft
	45 m	3,403 m	180.58		0 m	60 m
36C	148 ft	11,165 ft	6.24	CONCRETE	0 ft	197 ft
	45 m	3,403 m	0.58		0 m	60 m
18R	148 ft	9,819 ft	186.25	CONCRETE	0 ft	295 ft
	45 m	2,993 m	180.59		0 m	90 m
36L	148 ft	9,819 ft	6.25	CONCRETE	0 ft	295 ft
	45 m	2,993 m	0.58		0 m	90 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36C	DME	IAYT	110.30 MHz	18 nm	-	-	54 ft
				33 km	-		54 m
18C	LOC-ILS	IATY	108.70 MHz	18 nm	186.24	-	175 ft
				33 km	180.58		175 m
36C	LOC-ILS	IAYT	110.30 MHz	18 nm	6.24	-	175 ft
				33 km	0.58		175 m
36R	LOC-ILS	IALY	108.10 MHz	18 nm	6.29	-	175 ft
				33 km	0.63		175 m
18L	LOC-LOC	ILRA	109.75 MHz	18 nm	186.29	-	175 ft
				33 km	180.63		175 m
18C	GS	IATY	108.70 MHz	10 nm	186.24	3.00	175 ft
				19 km	180.58		175 m
36C	GS	IAYT	110.30 MHz	10 nm	6.24	3.00	175 ft
				19 km	0.58		175 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36R	GS	IALY	108.10 MHz	10 nm	6.29	3.00	175 ft
				19 km	0.63		175 m