

WIII

Jakarta Soekarno-Hatta Int'l

CCA5021


2024/05/07 1445Z

WIMM

Kualanamu Int'l

WIII DOLTA **G579** PLB **A585** MDN WIMM

774.87 nm / 1435.06 km

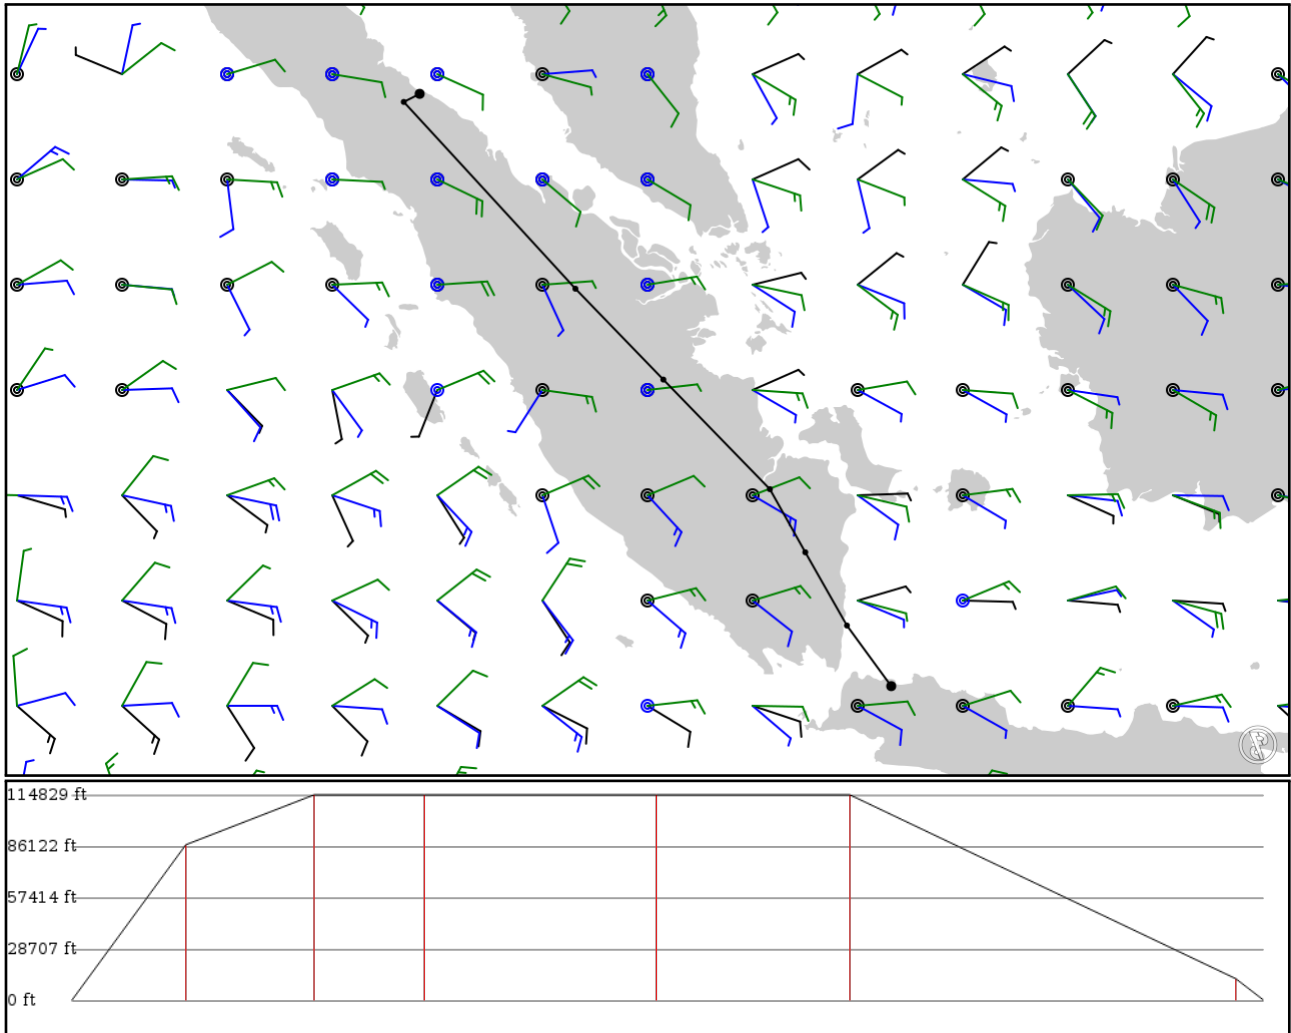

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
WIII APT	-	-6.12569 106.65700	0 ft 0 m	-	Jakarta Soekarno-Hatta Intl
DOLTA FIX	-	-5.12614 105.92500	26,500 ft 8,077 m	74	-
DOMIL FIX	G579 AWY-HI	-3.91892 105.23800	35,000 ft 10,668 m	83	-
PLB VOR	G579 AWY-HI	-2.87859 104.65300	35,000 ft 10,668 m	71	PALEMBANG
JATAM FIX	A585 AWY-HI	-1.07232 102.89400	35,000 ft 10,668 m	151	-
PKU VOR	A585 AWY-HI	0.42558 101.44200	35,000 ft 10,668 m	125	PEKANBARU
MDN VOR	A585 AWY-HI	3.50455 98.60770	3,700 ft 1,128 m	251	MEDAN
WIMM APT	-	3.63782 98.87060	0 ft 0 m	17	Kualanamu Int'l

WIII

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 3

Elevation: 34 ft / 10 m
Location: -6.119810 106.657000
Magnetic Var: 0.530 E

METAR

WIII 071430Z 08005KT 7000 FEW020 28/24 Q1010 NOSIG

TAF

TAF WIII 071100Z 0712/0818 20005KT 7000 FEW020 BECMG 0713/0715 5000 HZ BECMG 0802/0804 04010KT 8000 NSW BECMG 0810/0812 04010KT 8000 NSW

Frequencies

REC - 126.85 MHz - ATIS	CLD - 121.95 MHz -
CLD - 124.25 MHz -	SOEKARNO-HATTA CLEARANCE DELIVERY
SOEKARNO-HATTA CLEARANCE DELIVERY	CLD - 125.15 MHz -
GND - 121.60 MHz - SOEKARNO-HATTA GROUND	SOEKARNO-HATTA CLEARANCE DELIVERY
GND - 128.85 MHz - SOEKARNO-HATTA GROUND	GND - 121.00 MHz - SOEKARNO-HATTA GROUND
TWR - 118.20 MHz - SOEKARNO-HATTA TOWER	GND - 128.95 MHz - SOEKARNO-HATTA GROUND
TWR - 119.30 MHz - SOEKARNO-HATTA TOWER	TWR - 118.75 MHz - SOEKARNO-HATTA TOWER
APP - 124.20 MHz - JAKARTA ARRIVAL	TWR - 120.25 MHz - SOEKARNO-HATTA TOWER
APP - 119.75 MHz - JAKARTA DIRECTOR	APP - 125.45 MHz - JAKARTA ARRIVAL
APP - 124.55 MHz - JAKARTA DIRECTOR	APP - 123.75 MHz - JAKARTA DIRECTOR
APP - 125.05 MHz - JAKARTA DIRECTOR	APP - 124.95 MHz - JAKARTA DIRECTOR
APP - 124.15 MHz - JAKARTA RADAR	APP - 127.90 MHz - JAKARTA DIRECTOR
APP - 125.35 MHz - JAKARTA RADAR	APP - 124.35 MHz - JAKARTA RADAR
APP - 127.95 MHz - JAKARTA RADAR	APP - 126.45 MHz - JAKARTA RADAR
	APP - 130.10 MHz - JAKARTA RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	8,202 ft	68.13	ASPHALT	328 ft	846 ft
	46 m	2,500 m	67.61		100 m	258 m
24	150 ft	8,202 ft	248.13	ASPHALT	0 ft	0 ft
	46 m	2,500 m	247.60		0 m	0 m
07L	197 ft	11,820 ft	68.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	67.62		0 m	0 m
25R	197 ft	11,820 ft	248.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	247.62		0 m	0 m
07R	197 ft	12,015 ft	68.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	67.59		0 m	0 m
25L	197 ft	12,015 ft	248.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	247.59		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	ICHL	111.50 MHz	18 nm	68.13	-	21 ft
				33 km	67.60		21 m
07R	LOC-ILS	ICHR	110.50 MHz	18 nm	68.13	-	27 ft
				33 km	67.60		27 m
25L	LOC-ILS	ICGL	111.10 MHz	18 nm	248.12	-	34 ft
				33 km	247.59		34 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	LOC-ILS	ICGR	110.90 MHz	18 nm	248.13	-	29 ft
				33 km	247.60		29 m
07L	GS	ICHL	111.50 MHz	10 nm	68.25	3.00	29 ft
				19 km	67.72		29 m
07R	GS	ICHR	110.50 MHz	10 nm	68.24	3.00	34 ft
				19 km	67.71		34 m
25L	GS	ICGL	111.10 MHz	10 nm	248.24	3.00	27 ft
				19 km	247.71		27 m
25R	GS	ICGR	110.90 MHz	10 nm	248.25	3.00	21 ft
				19 km	247.72		21 m

WIMM

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 1

Elevation: 22 ft / 7 m
Location: 3.637820 98.870600
Magnetic Var: 0.144 W

METAR

WIMM 071400Z 26003KT 3000 BR SCT017 28/27 Q1010 NOSIG

TAF

TAF WIMM 071100Z 0712/0812 VRB04KT 8000 SCT018 BECMG 0713/0714 5000 HZ BECMG 0803/0805 01010KT 9999 NSW

Frequencies

REC - 126.30 MHz - MEDAN ATIS
GND - 130.30 MHz - KUALANAMU GROUND

TWR - 118.60 MHz - KUALANAMU TOWER
APP - 119.70 MHz - MEDAN DIRECTOR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	197 ft	12,315 ft	44.84	ASPHALT	0 ft	197 ft
	60 m	3,754 m	44.99		0 m	60 m
23	197 ft	12,315 ft	224.84	ASPHALT	0 ft	197 ft
	60 m	3,754 m	224.99		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	LOC-ILS	IMDN	110.10 MHz	18 nm	47.68	-	90 ft
				33 km	47.82		90 m
05	LOC-ILS	IDES	109.30 MHz	18 nm	44.84	-	22 ft
				33 km	44.98		22 m
23	LOC-ILS	IDEL	110.90 MHz	18 nm	224.84	-	22 ft
				33 km	224.98		22 m
05	GS	IDES	109.30 MHz	10 nm	44.84	3.00	22 ft
				19 km	44.98		22 m
23	GS	IDEL	110.90 MHz	10 nm	224.84	3.00	22 ft
				19 km	224.98		22 m
05	GS	IMDN	110.10 MHz	10 nm	47.09	3.00	90 ft
				19 km	47.24		90 m