

LJLJ
Ljubljana


S5-APP

EGSS
London Stansted

2024/05/10 0823Z

LJLJ ERKIR ETAGO KRH TERLA BUB COA SUMUM LOGAN EGSS

659.98 nm / 1222.29 km

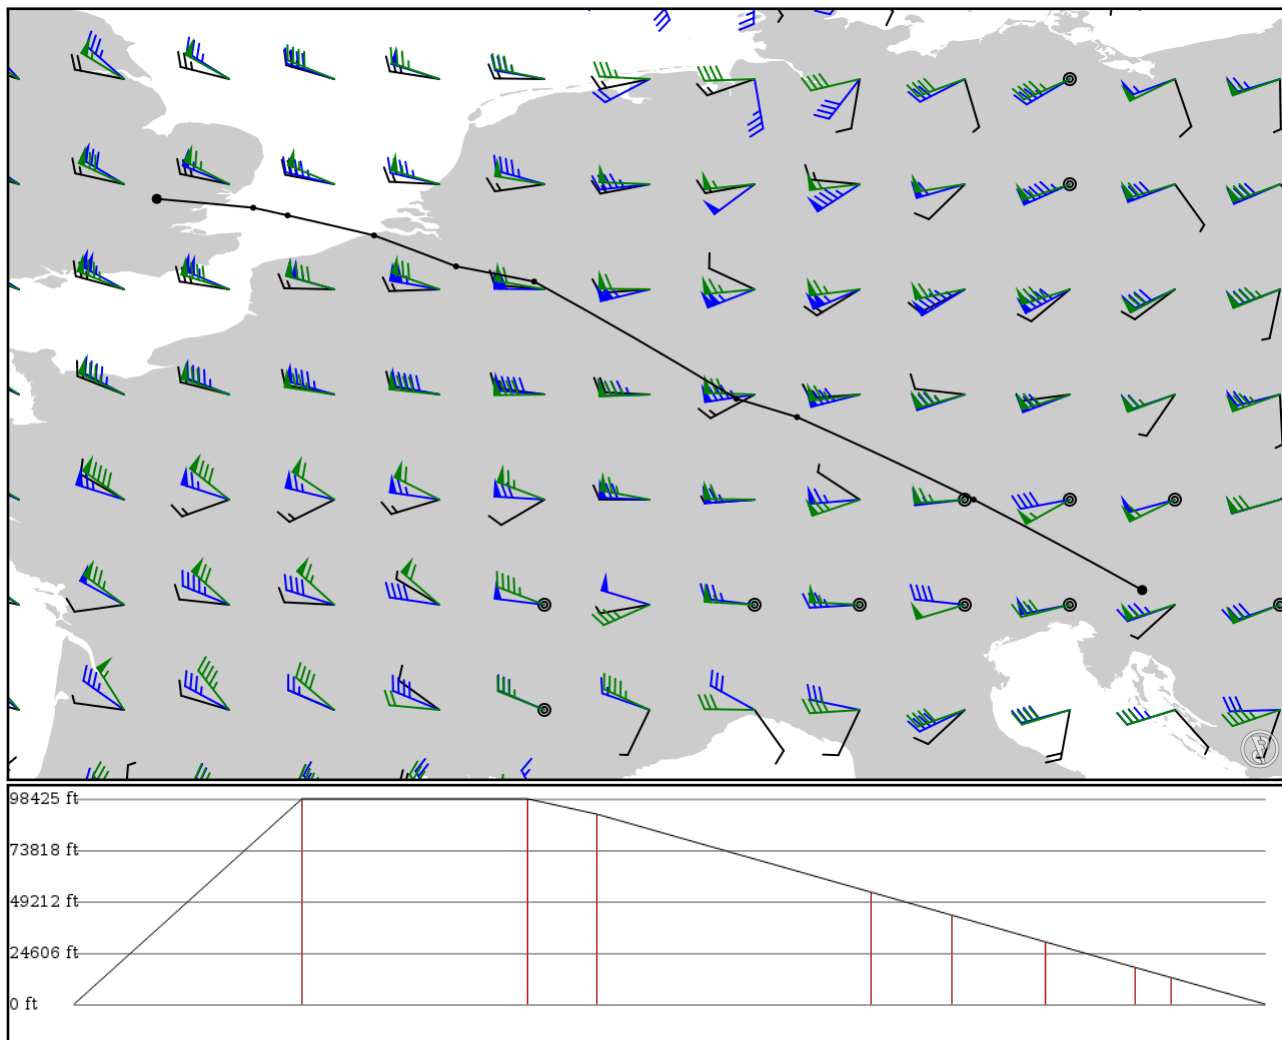

Notes

Decoded

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LJLJ	-	46.23249	0 ft	-	-
APT	-	14.44039	0 m		
ERKIR	-	47.53778	30,000 ft	126	-
FIX	-	12.00889	9,144 m		
ETAGO	-	48.72750	30,000 ft	124	-
FIX	-	9.46000	9,144 m		
KRH	-	48.99294	27,766 ft	38	KARLSRUHE VOR-DME
VOR	-	8.58424	8,463 m		
TERLA	-	50.68251	16,377 ft	151	-
FIX	-	5.66544	4,992 m		
BUB	-	50.90222	13,019 ft	44	BRUSSELS VOR-DME
VOR	-	4.53806	3,968 m		
COA	-	51.34806	9,120 ft	52	COSTA VOR-DME
VOR	-	3.35528	2,780 m		
SUMUM	-	51.63722	5,388 ft	49	-
FIX	-	2.10778	1,642 m		
LOGAN	-	51.74750	3,917 ft	19	-
FIX	-	1.61194	1,194 m		
EGSS	-	51.87508	0 ft	52	-
APT	-	0.21993	0 m		

LJLJ

Region: SLOVENIA
Timezone: EUROPE/LJUBLJANA
Runways: 1

Elevation: 1,271 ft / 387 m
Location: 46.223700 14.457600
Magnetic Var: 4.393 E

METAR

LJLJ 100800Z VRB01KT CAVOK 18/07 Q1021 NOSIG

TAF

TAF LJLJ 100500Z 1006/1106 30003KT CAVOK PROB30 TEMPO 1012/1017 12010KT

Frequencies

REC - 128.18 MHz - LJUBLJANA ATIS	GND - 121.62 MHz - LJUBLJANA GROUND
TWR - 118.00 MHz - LJUBLJANA TOWER	TWR - 118.75 MHz - LJUBLJANA TOWER
APP - 135.27 MHz - LJUBLJANA APP	APP - 136.00 MHz - LJUBLJANA APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	10,838 ft	126.47	ASPHALT	0 ft	0 ft
	45 m	3,303 m	122.08		0 m	0 m
30	148 ft	10,838 ft	306.50	ASPHALT	0 ft	0 ft
	45 m	3,303 m	302.11		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	LJB	110.50 MHz	18 nm	-	-	1,198 ft
				33 km	-		1,198 m
30	LOC-ILS	LJB	110.50 MHz	18 nm	306.49	-	1,271 ft
				33 km	302.10		1,271 m
30	GS	LJB	110.50 MHz	10 nm	306.49	3.00	1,271 ft
				19 km	302.10		1,271 m

EGSS

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 348 ft / 106 m
Location: 51.885100 0.234989
Magnetic Var: 0.578 E

METAR

EGSS 100750Z AUTO 17003KT 120V220 9999 NCD 17/12 Q1025

TAF

TAF EGSS 100457Z 1006/1112 15004KT 4000 BR FEW045 BECMG 1006/1009 9999 NSW TEMPO 1020/1106 7000 PROB30 TEMPO 1022/

Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.21		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.22		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.22		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.22		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.22		348 m