

LIPE

Bologna-Borgo Panigale "Guglielmo Marconi"


LIRN

Napoli-Capodichino "Ugo Niutta"

2024/06/05 0715Z

LIPE NIKMA **Z910** GENGI LIRN

258.41 nm / 478.57 km

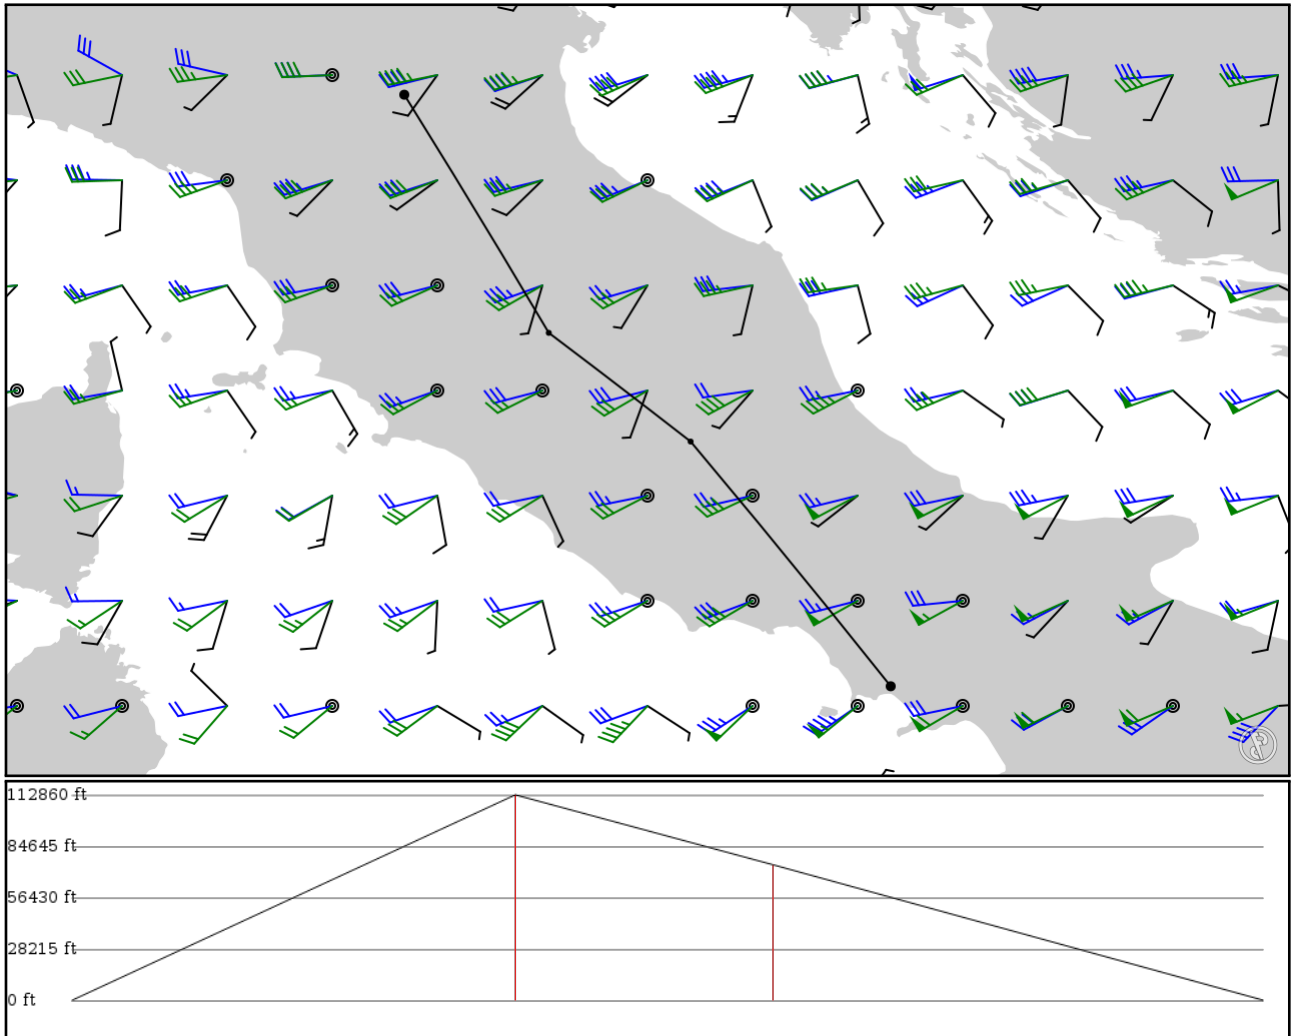

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
LIPE	-	44.53560	0 ft	-	Bologna-Borgo Panigale	"Guglielmo Marconi"
APT	-	11.28830	0 m			
NIKMA	-	43.06640	34,400 ft	96	-	
FIX	-	12.18030	10,485 m			
GENGI	Z910	42.39580	22,700 ft	55	-	
FIX	AWY-HI	13.05580	6,919 m			
LIRN	-	40.88600	0 ft	106	Napoli-Capodichino	"Ugo Niutta"
APT	-	14.29080	0 m			

LIPE

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 123 ft / 37 m
Location: 44.535600 11.288300
Magnetic Var: 3.640 E

METAR

LIPE 050650Z 26007KT CAVOK 21/14 Q1015

TAF

TAF LIPE 050500Z 0506/0606 VRB06KT 9999 FEW030

Frequencies

REC - 134.87 MHz - ATIS
TWR - 120.80 MHz - BOLOGNA TOWER
APP - 129.90 MHz - BOLOGNA APPROACH
GND - 129.92 MHz - BOLOGNA GROUND
APP - 120.10 MHz - BOLOGNA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	9,206 ft	116.79	ASPHALT	1,017 ft	243 ft
	45 m	2,806 m	113.15		310 m	74 m
30	148 ft	9,206 ft	296.81	ASPHALT	1,188 ft	180 ft
	45 m	2,806 m	293.17		362 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	DME	BLN	108.90 MHz	18 nm	-	-	131 ft
				33 km	-		131 m
30	DME	IBBP	109.75 MHz	18 nm	-	-	123 ft
				33 km	-		123 m
12	LOC-ILS	BLN	108.90 MHz	18 nm	116.81	-	123 ft
				33 km	113.17		123 m
30	LOC-ILS	IBBP	109.75 MHz	18 nm	296.66	-	123 ft
				33 km	293.02		123 m
12	GS	BLN	108.90 MHz	10 nm	117.59	3.00	120 ft
				19 km	113.95		120 m
30	GS	IBBP	109.75 MHz	10 nm	297.75	3.50	123 ft
				19 km	294.11		123 m

LIRN

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 292 ft / 89 m
Location: 40.886000 14.290800
Magnetic Var: 3.969 E

METAR

LIRN 050650Z VRB02KT CAVOK 23/16 Q1016 NOSIG

TAF

TAF LIRN 050500Z 0506/0606 VRB04KT 9999 FEW020 BECMG 0510/0512 27012KT BECMG 0516/0518 VRB05KT

Frequencies

APP - 124.35 MHz - NAPOLI APPROACH
TWR - 118.50 MHz - NAPOLI TOWER
REC - 135.97 MHz - ATIS
APP - 120.95 MHz - NAPOLI APPROACH
GND - 121.90 MHz - NAPOLI GROUND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	8,630 ft	58.04	ASPHALT	1,312 ft	217 ft
	45 m	2,630 m	54.07		400 m	66 m
24	148 ft	8,630 ft	238.05	ASPHALT	607 ft	230 ft
	45 m	2,630 m	234.09		185 m	70 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	NPC	110.15 MHz	25 nm	-	-	294 ft
				46 km	-		294 m
24	DME	INPL	109.50 MHz	25 nm	-	-	250 ft
				46 km	-		250 m
06	LOC-ILS	NPC	110.15 MHz	18 nm	58.08	-	292 ft
				33 km	54.11		292 m
24	LOC-ILS	INPL	109.50 MHz	18 nm	238.03	-	288 ft
				33 km	234.06		288 m
24	LOC-ILS	INP	109.50 MHz	18 nm	238.08	-	292 ft
				33 km	234.11		292 m
24	GS	INPL	109.50 MHz	10 nm	238.06	3.33	250 ft
				19 km	234.09		250 m
24	GS	INP	109.50 MHz	10 nm	238.08	3.33	292 ft
				19 km	234.11		292 m