

KATL

Hartsfield Jackson Atlanta Intl


RJAA

NARITA INTL

2024/05/06 1142Z

KATL ATL J45 BNA Q19 PLESS J45 STL J151 DSM J45 ABR V15 MOT J483 VLN J475 YWV NCA11 YESKA J133
ANC V462 AMOTT R580 OFORD R341 NATES R220 IXE RJAA

5982.45 nm / 11079.50 km

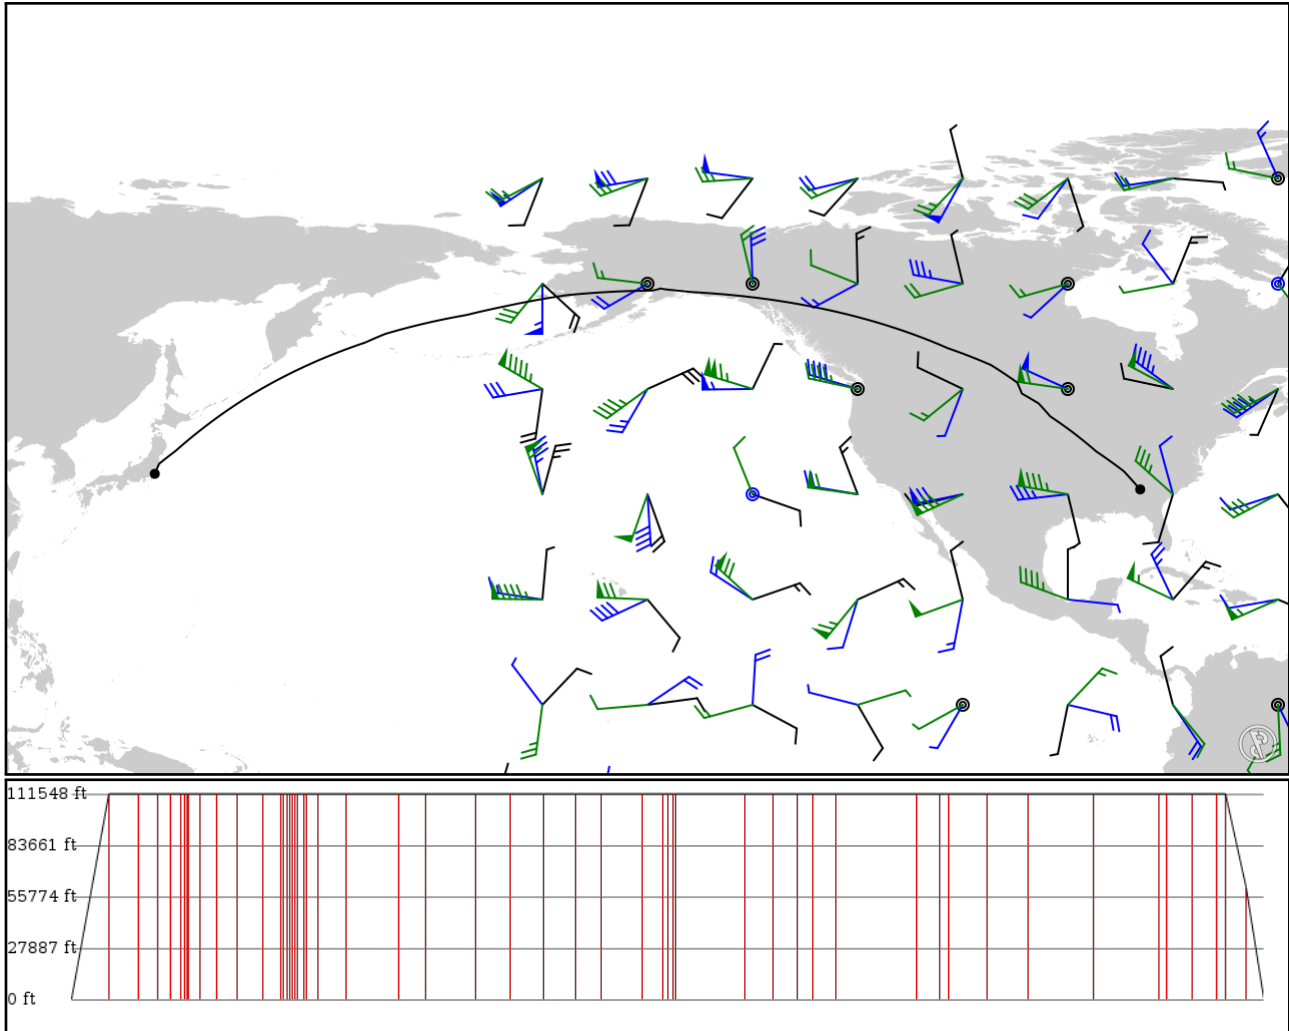

Notes

Basic altitude profile:

- Ascent Rate: 2600ft/min
- Ascent Speed: 420kts
- Cruise Altitude: 38000ft
- Cruise Speed: 420kts
- Descent Rate: 1600ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KATL APT	-	33.63662 -84.42821	0 ft 0 m	-	Hartsfield Jackson Atlanta Intl
ATL VOR	-	33.62908 -84.43508	200 ft 61 m	0	ATLANTA VORTAC
BNA VOR	J45 AWY-HI	36.13697 -86.68478	34,000 ft 10,363 m	186	NASHVILLE VORTAC
PLESS FIX	Q19 AWY-HI	37.80958 -88.96319	34,000 ft 10,363 m	148	-
STL DME	J45 AWY-HI	38.86069 -90.48237	34,000 ft 10,363 m	95	ST LOUIS VORTAC
TWAIN FIX	J151 AWY-HI	39.67237 -91.44309	34,000 ft 10,363 m	66	-
COLIE FIX	J151 AWY-HI	40.28059 -92.18387	34,000 ft 10,363 m	49	-
SKBOZ FIX	J151 AWY-HI	40.58117 -92.55726	34,000 ft 10,363 m	24	-
CHASY FIX	J151 AWY-HI	40.69396 -92.69864	34,000 ft 10,363 m	9	-
JAVAS FIX	J151 AWY-HI	40.76563 -92.78883	34,000 ft 10,363 m	5	-
DSM VOR	J151 AWY-HI	41.43761 -93.64856	34,000 ft 10,363 m	56	DES MOINES VORTAC
EYHUX FIX	J45 AWY-HI	42.43556 -95.01938	34,000 ft 10,363 m	85	-
FSD VOR	J45 AWY-HI	43.64950 -96.78114	34,000 ft 10,363 m	106	SIOUX FALLS VORTAC
ABR VOR	J45 AWY-HI	45.41736 -98.36872	34,000 ft 10,363 m	126	ABERDEEN VOR-DME
WISEK FIX	V15 AWY-LO	46.38037 -99.99416	34,000 ft 10,363 m	89	-
MOFIT FIX	V15 AWY-LO	46.55038 -100.29134	34,000 ft 10,363 m	15	-
BIS VOR	V15 AWY-LO	46.76175 -100.66542	34,000 ft 10,363 m	19	BISMARCK VOR-DME
HANCO FIX	V15 AWY-LO	46.92228 -100.73025	34,000 ft 10,363 m	10	-
WILTN FIX	V15 AWY-LO	47.08281 -100.79550	34,000 ft 10,363 m	10	-
WASHR FIX	V15 AWY-LO	47.30742 -100.88764	34,000 ft 10,363 m	14	-
TERTL FIX	V15 AWY-LO	47.57122 -100.99656	34,000 ft 10,363 m	16	-
HIDEL FIX	V15 AWY-LO	48.02918 -101.18872	34,000 ft 10,363 m	28	-
PABIC FIX	V15 AWY-LO	48.05208 -101.19842	34,000 ft 10,363 m	1	-
MOT VOR	V15 AWY-LO	48.26033 -101.28706	34,000 ft 10,363 m	13	MINOT VORTAC
MOT61 FIX	J483 AWY-HI	48.99905 -102.34071	34,000 ft 10,363 m	60	-
VLN VOR	J483 AWY-HI	50.66700 -104.89031	34,000 ft 10,363 m	140	LUMSDEN VORTAC
YWV	J475	52.98139	34,000 ft	260	WAINWRIGHT VOR-DME

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VOR	AWY-HI	-110.83333	10,363 m		
NUBEG	NCA11	54.28167	34,000 ft	136	-
FIX	AWY-HI	-113.98500	10,363 m		
LEPET	NCA11	56.42667	34,000 ft	250	-
FIX	AWY-HI	-120.27167	10,363 m		
BINGA	NCA11	57.70197	34,000 ft	172	-
FIX	AWY-HI	-125.00000	10,363 m		
OMLOK	NCA11	58.77933	34,000 ft	170	-
FIX	AWY-HI	-130.00000	10,363 m		
ARIUS	NCA11	59.61000	34,000 ft	161	-
FIX	AWY-HI	-135.00000	10,363 m		
COHIL	NCA11	60.10861	34,000 ft	124	-
FIX	AWY-HI	-139.00000	10,363 m		
REMBY	NCA11	60.66667	34,000 ft	210	-
FIX	AWY-HI	-146.00000	10,363 m		
YESKA	NCA11	61.00022	34,000 ft	99	-
FIX	AWY-HI	-149.33384	10,363 m		
ANC	J133	61.15081	34,000 ft	26	-
VOR	AWY-HI	-150.20656	10,363 m		
GASTO	V462	60.94399	34,000 ft	27	-
FIX	AWY-LO	-151.04532	10,363 m		
AMOTT	V462	60.87405	34,000 ft	10	-
FIX	AWY-LO	-151.37322	10,363 m		
ORCCA	R580	60.25000	34,000 ft	344	-
FIX	AWY-HI	-163.00000	10,363 m		
ORVIL	R580	59.51367	34,000 ft	143	-
FIX	AWY-HI	-167.54078	10,363 m		
ONEOX	R580	58.76681	34,000 ft	124	-
FIX	AWY-HI	-171.31683	10,363 m		
OGGOE	R580	58.28556	34,000 ft	76	-
FIX	AWY-HI	-173.58278	10,363 m		
OFORD	R580	57.53631	34,000 ft	112	-
FIX	AWY-HI	-176.80139	10,363 m		
NATES	R341	54.92769	34,000 ft	405	-
FIX	AWY-HI	171.98017	10,363 m		
NIKLL	R220	53.74642	34,000 ft	119	-
FIX	AWY-HI	169.23181	10,363 m		
NYMPH	R220	53.40878	34,000 ft	40	-
FIX	AWY-HI	168.23983	10,363 m		
NUZAN	R220	51.65764	34,000 ft	198	-
FIX	AWY-HI	163.64494	10,363 m		
NIPPI	R220	49.71067	34,000 ft	201	-
FIX	AWY-HI	159.34675	10,363 m		
NOGAL	R220	46.21667	34,000 ft	330	-
FIX	AWY-LO	153.00333	10,363 m		
NUBDA	R220	42.39106	34,000 ft	330	-
FIX	AWY-LO	147.47575	10,363 m		
NANNO	R220	41.91667	34,000 ft	39	-
FIX	AWY-LO	146.86000	10,363 m		
NODAN	R220	40.42000	34,000 ft	123	-
FIX	AWY-LO	144.99667	10,363 m		
NANAC	R220	38.90631	34,000 ft	122	-
FIX	AWY-LO	143.22799	10,363 m		
NIKON	R220	38.32538	34,000 ft	49	-
FIX	AWY-LO	142.46599	10,363 m		
IXE	R220	37.14886	18,600 ft	100	IWAKI VOR-DME

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VOR	AWY-LO	140.97569	5,669 m		
RJAA	-	35.77655	0 ft	87	NARITA INTL
APT	-	140.38277	0 m		

KATL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 5

Elevation: 1,026 ft / 313 m
Location: 33.636600 -84.428000
Magnetic Var: 5.629 W

METAR

KATL 061052Z 00000KT 10SM FEW110 SCT140 SCT180 BKN220 19/18 A3003 RMK A02 SLP161 T01940178

TAF

TAF AMD KATL 060931Z 0610/0712 14003KT P6SM FEW015 SCT050 BKN120 TEMPO 0610/0614 FEW008 BKN012 FM061400 22005KT P

Frequencies

REC - 119.65 MHz - D-ATIS	REC - 125.55 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 121.65 MHz - ATLANTA GROUND	GND - 121.75 MHz - ATLANTA GROUND
GND - 121.90 MHz - ATLANTA GROUND	TWR - 119.10 MHz - ATLANTA TOWER
TWR - 119.30 MHz - ATLANTA TOWER	TWR - 119.50 MHz - ATLANTA TOWER
TWR - 123.85 MHz - ATLANTA TOWER	TWR - 125.32 MHz - ATLANTA TOWER
APP - 127.90 MHz - ATLANTA APPROACH	APP - 128.00 MHz - ATLANTA APPROACH
DEP - 125.65 MHz - ATLANTA DEPARTURE	DEP - 125.70 MHz - ATLANTA DEPARTURE
DEP - 135.37 MHz - ATLANTA DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	151 ft	12,400 ft	89.99	CONCRETE	0 ft	0 ft
	46 m	3,780 m	95.62		0 m	0 m
27R	151 ft	12,400 ft	270.01	CONCRETE	518 ft	0 ft
	46 m	3,780 m	275.64		158 m	0 m
09R	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.60		0 m	0 m
27L	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08L	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
26R	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
10	151 ft	9,008 ft	89.97	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.60		0 m	0 m
28	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08R	151 ft	10,009 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	95.60		0 m	0 m
26L	151 ft	10,009 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	3,051 m	275.62		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IHFV	109.30 MHz	18 nm	-	-	993 ft
				33 km	-		993 m
08R	DME	IATL	109.90 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IHZK	110.50 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
09R	DME	IFUN	108.90 MHz	18 nm	-	-	987 ft
				33 km	-		987 m
10	DME	IOMO	111.55 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
26L	DME	IBRU	108.70 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m
26R	DME	IGXZ	110.10 MHz	18 nm	-	-	1,000 ft
				33 km	-		1,000 m
27L	DME	IFSQ	108.50 MHz	18 nm	-	-	1,020 ft
				33 km	-		1,020 m
27R	DME	IAFA	111.30 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
28	DME	IPKU	111.75 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
08L	LOC-ILS	IHFV	109.30 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
08R	LOC-ILS	IATL	109.90 MHz	18 nm	89.99	-	1,026 ft
				33 km	95.62		1,026 m
09L	LOC-ILS	IHZK	110.50 MHz	18 nm	90.01	-	968 ft
				33 km	95.64		968 m
09R	LOC-ILS	IFUN	108.90 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
10	LOC-ILS	IOMO	111.55 MHz	18 nm	89.98	-	970 ft
				33 km	95.61		970 m
26L	LOC-ILS	IBRU	108.70 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
26R	LOC-ILS	IGXZ	110.10 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27L	LOC-ILS	IFSQ	108.50 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27R	LOC-ILS	IAFA	111.30 MHz	18 nm	270.00	-	1,026 ft
				33 km	275.62		1,026 m
28	LOC-ILS	IPKU	111.75 MHz	18 nm	269.97	-	970 ft
				33 km	275.60		970 m
08L	GS	IHFV	109.30 MHz	10 nm	90.96	3.00	1,008 ft
				19 km	96.59		1,008 m
08R	GS	IATL	109.90 MHz	10 nm	90.96	3.00	1,012 ft
				19 km	96.59		1,012 m
09L	GS	IHZK	110.50 MHz	10 nm	90.02	3.00	1,017 ft
				19 km	95.65		1,017 m
09R	GS	IFUN	108.90 MHz	10 nm	90.96	3.00	1,021 ft
				19 km	96.59		1,021 m
10	GS	IOMO	111.55 MHz	10 nm	90.94	3.00	985 ft
				19 km	96.57		985 m
26L	GS	IBRU	108.70 MHz	10 nm	270.96	3.00	992 ft
				19 km	276.59		992 m
26R	GS	IGXZ	110.10 MHz	10 nm	270.96	3.00	984 ft
				19 km	276.59		984 m
27L	GS	IFSQ	108.50 MHz	10 nm	270.96	3.00	990 ft
				19 km	276.59		990 m
27R	GS	IAFA	111.30 MHz	10 nm	270.02	3.00	981 ft
				19 km	275.65		981 m
28	GS	IPKU	111.75 MHz	10 nm	270.94	3.00	990 ft
				19 km	276.57		990 m

RJAA

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 135 ft / 41 m
Location: 35.777200 140.382000
Magnetic Var: 7.777 W

METAR

RJAA 061130Z 19010KT 150V230 9999 FEW020 BKN140 20/16 Q1016 NOSIG

TAF

TAF TAF RJAA 060505Z 0606/0712 18012KT 9999 FEW020 TEMPO 0703/0706 17018G30KT TEMPO 0706/0712 4000 -SHRA BR FEW000

Frequencies

REC - 128.25 MHz - ATIS	TWR - 122.70 MHz - NARITA TOWER
TWR - 126.20 MHz - NARITA TOWER	TWR - 118.35 MHz - NARITA TOWER
TWR - 118.20 MHz - NARITA TOWER	GND - 121.85 MHz - NARITA GROUND
GND - 121.95 MHz - NARITA GROUND	GND - 121.60 MHz - NARITA GROUND
GND - 121.75 MHz - NARITA GROUND	APP - 125.20 MHz - NARITA APPROACH
APP - 124.40 MHz - NARITA APPROACH	APP - 121.27 MHz - NARITA APPROACH
APP - 125.80 MHz - NARITA APPROACH	APP - 127.70 MHz - NARITA APPROACH
DEP - 120.60 MHz - NARITA DEPARTURE	DEP - 127.50 MHz - NARITA DEPARTURE
DEP - 119.60 MHz - NARITA DEPARTURE	DEP - 125.52 MHz - NARITA DEPARTURE
DEP - 124.20 MHz - NARITA DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16R	197 ft	13,146 ft	149.63	ASPHALT	0 ft	407 ft
	60 m	4,007 m	157.41		0 m	124 m
34L	197 ft	13,146 ft	329.64	ASPHALT	0 ft	404 ft
	60 m	4,007 m	337.42		0 m	123 m
16L	197 ft	8,210 ft	149.61	ASPHALT	0 ft	197 ft
	60 m	2,503 m	157.39		0 m	60 m
34R	197 ft	8,210 ft	329.62	ASPHALT	0 ft	0 ft
	60 m	2,503 m	337.40		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	DME	ITM	110.70 MHz	18 nm	-	-	145 ft
				33 km	-		145 m
16R	DME	IKF	111.50 MHz	18 nm	-	-	145 ft
				33 km	-		145 m
34L	DME	IYQ	111.90 MHz	18 nm	-	-	153 ft
				33 km	-		153 m
34R	DME	ITJ	110.90 MHz	18 nm	-	-	148 ft
				33 km	-		148 m
16L	LOC-ILS	ITM	110.70 MHz	18 nm	149.64	-	135 ft
				33 km	157.42		135 m
16R	LOC-ILS	IKF	111.50 MHz	18 nm	149.62	-	135 ft
				33 km	157.40		135 m
34L	LOC-ILS	IYQ	111.90 MHz	18 nm	329.62	-	135 ft
				33 km	337.40		135 m
34R	LOC-ILS	ITJ	110.90 MHz	18 nm	329.64	-	135 ft
				33 km	337.42		135 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	GS	ITM	110.70 MHz	10 nm	149.64	3.00	135 ft
				19 km	157.42		135 m
16R	GS	IKF	111.50 MHz	10 nm	149.62	3.00	135 ft
				19 km	157.40		135 m
34L	GS	IYQ	111.90 MHz	10 nm	329.62	3.00	135 ft
				19 km	337.40		135 m
34R	GS	ITJ	110.90 MHz	10 nm	329.64	3.00	135 ft
				19 km	337.42		135 m