


2024/05/16 0326Z

GCFV KORAL **UG5** BARAM GMMN

441.54 nm / 817.73 km

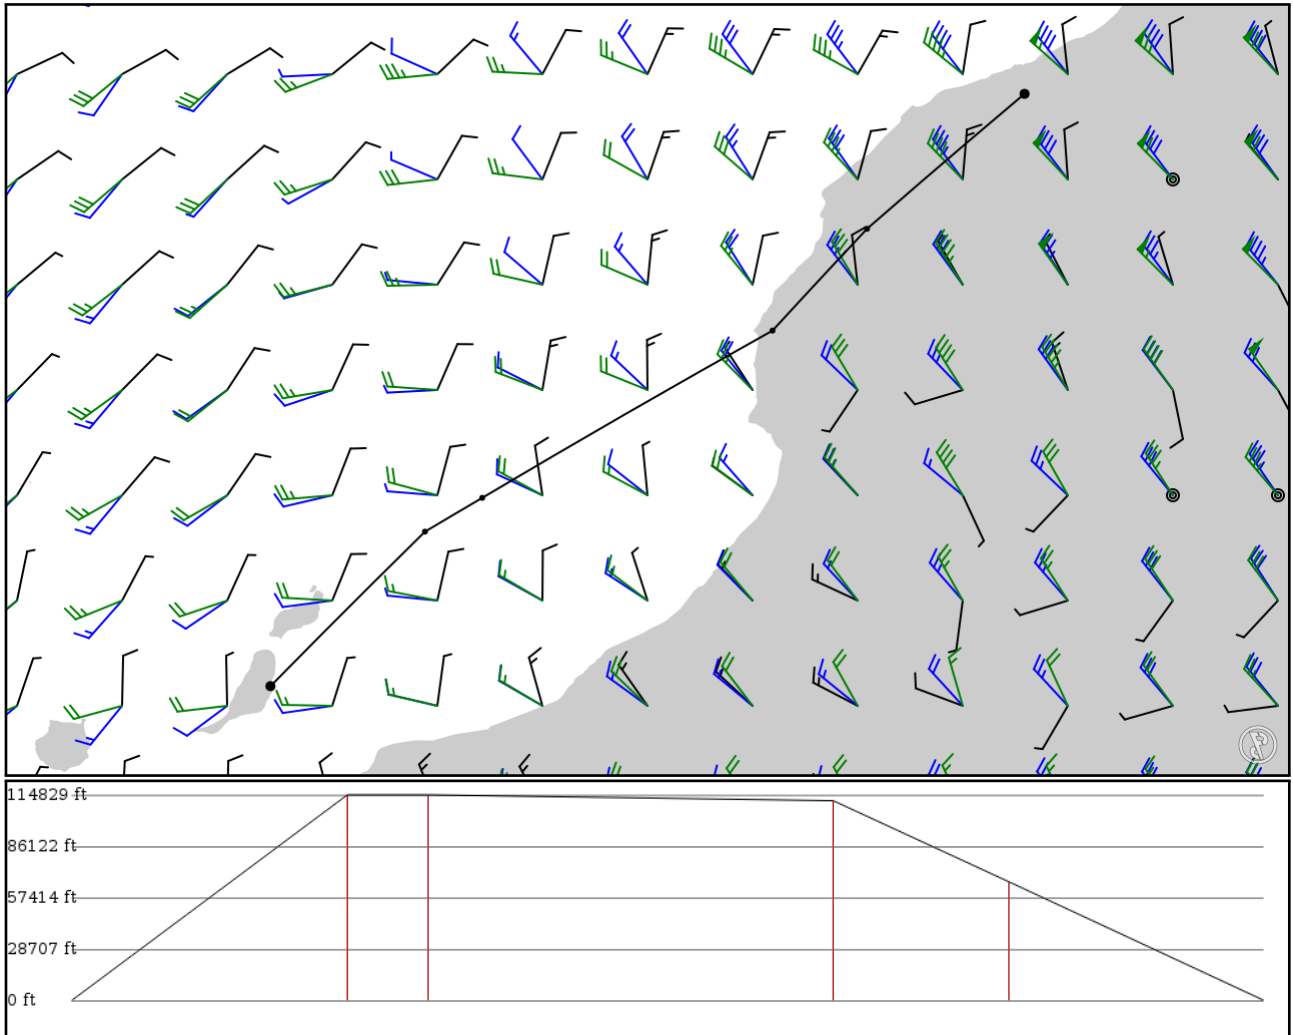

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
GCFV	-	28.44820	0 ft	-	Fuerteventura
APT	-	-13.86390	0 m	-	
KORAL	-	29.73140	35,000 ft	102	-
FIX	-	-12.57830	10,668 m	-	
SONSO	UG5	30.01220	35,000 ft	29	-
FIX	AWY-HI	-12.10190	10,668 m	-	
ESS	UG5	31.40130	34,000 ft	150	ESSAOUIRA
VOR	AWY-HI	-9.68692	10,363 m	-	
BARAM	UG5	32.24690	20,200 ft	64	-
FIX	AWY-HI	-8.90000	6,157 m	-	
GMMN	-	33.36740	0 ft	94	Casablanca Mohammed V Intl
APT	-	-7.58998	0 m	-	

GCFV

Region: CANARY ISLANDS
Timezone: ATLANTIC/CANARY
Runways: 1

Elevation: 83 ft / 25 m
Location: 28.448200 -13.863900
Magnetic Var: 3.369 W

METAR

GCFV 160300Z AUTO 01013KT 9999 OVC040 19/11 Q1014

TAF

TAF TAF GCFV 160200Z 1603/1703 02013KT 9999 BKN040 TX23/1614Z TN18/1606Z

Frequencies

REC - 118.65 MHz - ATIS
TWR - 119.20 MHz - FUERTEVENTURA TOWER
APP - 129.30 MHz - CANARIAS APPROACH
TWR - 118.47 MHz - FUERTEVENTURA TOWER
GND - 121.70 MHz - FUERTEVENTURA GROUND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01	148 ft	11,196 ft	1.67	ASPHALT	3,278 ft	0 ft
	45 m	3,413 m	5.03		999 m	0 m
19	148 ft	11,196 ft	181.67	ASPHALT	1,503 ft	0 ft
	45 m	3,413 m	185.04		458 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	LOC-ILS	IFV	109.50 MHz	18 nm	1.66	-	83 ft
				33 km	5.03		83 m
19	LOC-ILS	IFA	111.30 MHz	18 nm	181.66	-	83 ft
				33 km	185.03		83 m
01	GS	IFV	109.50 MHz	10 nm	1.66	3.00	83 ft
				19 km	5.03		83 m
19	GS	IFA	111.30 MHz	10 nm	181.66	3.45	83 ft
				19 km	185.03		83 m

GMMN

Region: MOROCCO
Timezone: AFRICA/CASABLANCA
Runways: 2

Elevation: 655 ft / 200 m
Location: 33.367400 -7.589980
Magnetic Var: 1.100 W

METAR

GMMN 160300Z 09006KT CAVOK 12/06 Q1013 NOSIG

TAF

TAF GMMN 152300Z 1600/1706 04006KT CAVOK BECMG 1608/1611 36012KT BECMG 1619/1622 VRB02KT

Frequencies

REC - 126.30 MHz - ATIS
APP - 121.30 MHz -
TWR - 118.50 MHz -
GND - 130.60 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17L	148 ft	12,231 ft	163.94	ASPHALT	0 ft	988 ft
	45 m	3,728 m	165.04		0 m	301 m
35R	148 ft	12,231 ft	343.95	ASPHALT	0 ft	1,004 ft
	45 m	3,728 m	345.05		0 m	306 m
17R	148 ft	12,188 ft	163.98	ASPHALT	0 ft	207 ft
	45 m	3,715 m	165.08		0 m	63 m
35L	148 ft	12,188 ft	343.98	ASPHALT	0 ft	223 ft
	45 m	3,715 m	345.08		0 m	68 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
35L	DME	INL	110.70 MHz	18 nm	-	-	656 ft
				33 km	-		656 m
17R	LOC-ILS	CAS	108.30 MHz	18 nm	163.98	-	655 ft
				33 km	165.08		655 m
35L	LOC-ILS	INL	110.70 MHz	18 nm	343.98	-	655 ft
				33 km	345.08		655 m
35R	LOC-ILS	INR	109.90 MHz	18 nm	343.95	-	655 ft
				33 km	345.05		655 m
17R	GS	CAS	108.30 MHz	10 nm	163.98	3.00	655 ft
				19 km	165.08		655 m
35L	GS	INL	110.70 MHz	10 nm	343.98	3.00	655 ft
				19 km	345.08		655 m
35R	GS	INR	109.90 MHz	10 nm	343.95	2.70	655 ft
				19 km	345.05		655 m