

KFXE

Fort Lauderdale Executive


KDAB

Daytona Beach Intl

2024/05/23 2119Z

KFXE TPSTR KDAB

185.23 nm / 343.05 km

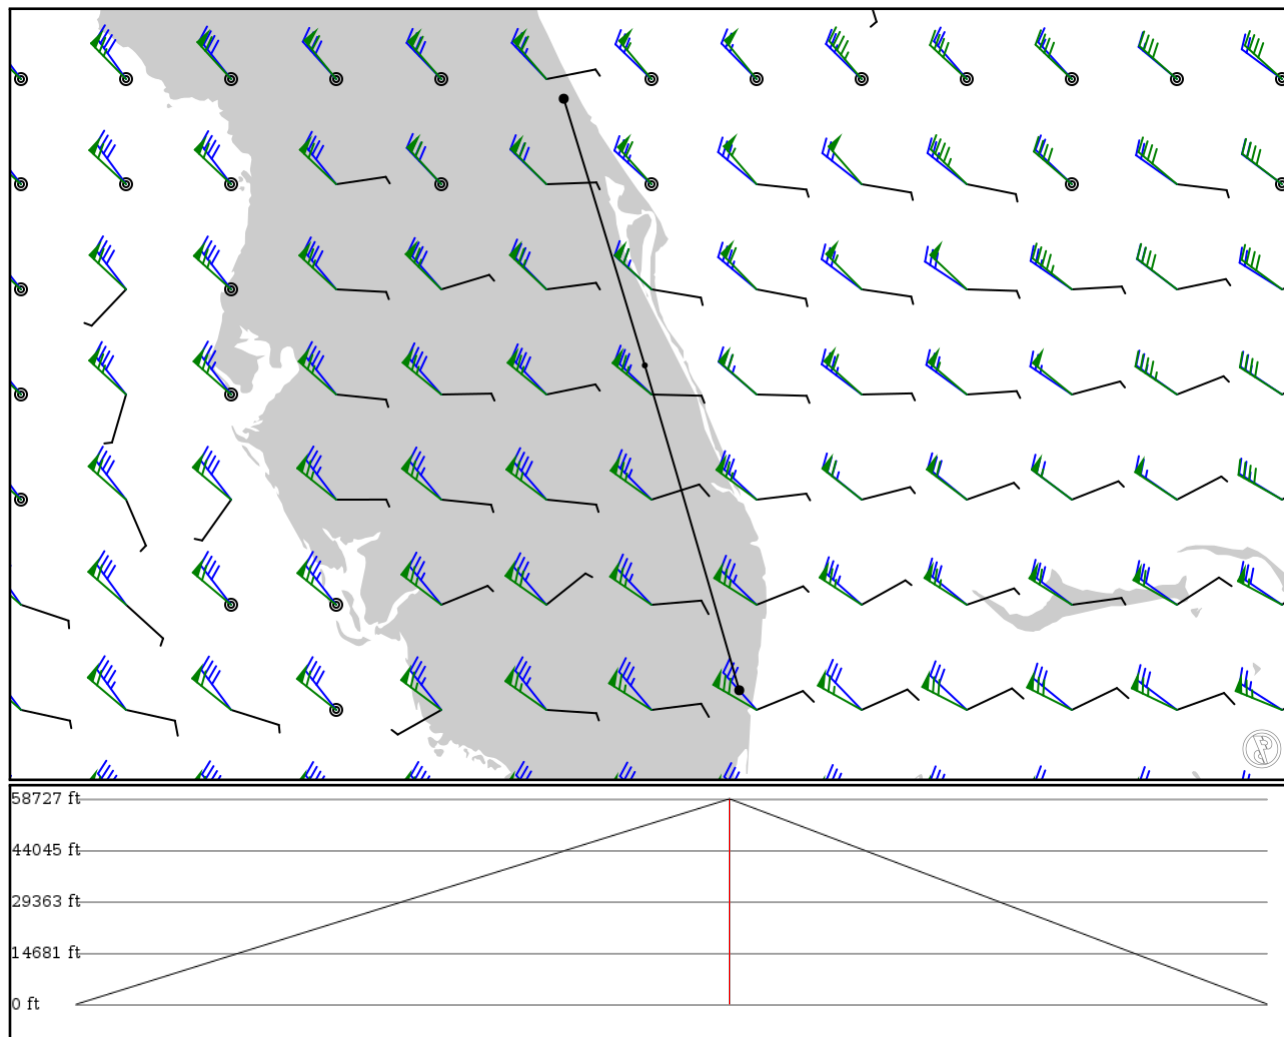

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KFXE APT	-	26.19700 -80.17040	0 ft 0 m	-	Fort Lauderdale Executive
TPSTR FIX	-	27.83530 -80.64690	17,900 ft 5,456 m	101	-
KDAB APT	-	29.17990 -81.05600	0 ft 0 m	83	Daytona Beach Intl

KFXE

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 13 ft / 4 m
Location: 26.197000 -80.170400
Magnetic Var: 7.397 W

METAR

KFXE 232053Z 07014G18KT 10SM CLR 31/21 A2993 RMK A02 SLP137 T03110211 58015

TAF

KFXE 232100Z 2321/2418 08011G20KT P6SM SCT030 SCT050 FM240400 VRB04KT P6SM FEW060 FM241700 10009KT P6SM FEW030

Frequencies

REC - 119.85 MHz - EXECUTIVE ATIS
CLD - 127.95 MHz - EXECUTIVE CLEARANCE DELIVERY
TWR - 120.90 MHz - EXECUTIVE TOWER
APP - 119.70 MHz - MIAMI APPROACH
COM - 122.95 MHz - EXECUTIVE UNICOM
GND - 121.75 MHz - EXECUTIVE GROUND
APP - 119.70 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	100 ft	5,998 ft	83.75	ASPHALT	0 ft	197 ft
	30 m	1,828 m	91.14		0 m	60 m
27	100 ft	5,998 ft	263.75	ASPHALT	0 ft	197 ft
	30 m	1,828 m	271.15		0 m	60 m
13	100 ft	4,004 ft	128.94	ASPHALT	0 ft	148 ft
	30 m	1,220 m	136.34		0 m	45 m
31	100 ft	4,004 ft	308.95	ASPHALT	0 ft	148 ft
	30 m	1,220 m	316.34		0 m	45 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09	LOC-ILS	IFXE	111.10 MHz	18 nm	83.76	-	13 ft
				33 km	91.16		13 m
09	GS	IFXE	111.10 MHz	10 nm	83.76	3.00	13 ft
				19 km	91.16		13 m

KDAB

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 34 ft / 10 m
Location: 29.179900 -81.056000
Magnetic Var: 7.240 W

METAR

KDAB 232053Z 07011KT 10SM FEW045 SCT130 SCT250 28/19 A3000 RMK A02 SLP157 T02830194 56004

TAF

TAF KDAB 231724Z 2318/2418 08010KT P6SM SCT060 SCT250 FM240200 VRB02KT P6SM FEW070 FEW250 FM241600 08008KT P6SM S

Frequencies

COM - 122.95 MHz - DAYTONA UNICOM
TWR - 120.70 MHz - DAYTONA TOWER
DEP - 123.90 MHz - DAYTONA DEPARTURE

GND - 121.90 MHz - DAYTONA GROUND
APP - 125.80 MHz - DAYTONA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	151 ft	10,511 ft	65.11	ASPHALT	709 ft	381 ft
	46 m	3,204 m	72.35		216 m	116 m
25R	151 ft	10,511 ft	245.12	ASPHALT	0 ft	200 ft
	46 m	3,204 m	252.36		0 m	61 m
16	151 ft	6,006 ft	157.27	ASPHALT	0 ft	207 ft
	46 m	1,831 m	164.51		0 m	63 m
34	151 ft	6,006 ft	337.27	ASPHALT	0 ft	203 ft
	46 m	1,831 m	344.51		0 m	62 m
07R	98 ft	3,199 ft	65.04	ASPHALT	0 ft	0 ft
	30 m	975 m	72.28		0 m	0 m
25L	98 ft	3,199 ft	245.04	ASPHALT	0 ft	0 ft
	30 m	975 m	252.28		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	DME	IDBF	109.70 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
07L	LOC-ILS	IDAB	109.70 MHz	18 nm	65.12	-	27 ft
				33 km	72.36		27 m
25R	LOC-ILS	IDBF	109.70 MHz	18 nm	245.11	-	34 ft
				33 km	252.35		34 m
07L	GS	IDAB	109.70 MHz	10 nm	65.22	3.00	26 ft
				19 km	72.46		26 m
25R	GS	IDBF	109.70 MHz	10 nm	245.22	3.00	34 ft
				19 km	252.46		34 m