


2024/05/13 0543Z

KEWR HOPMI HAGVI FANGU MUQXU 11194 KD69W 15173 DPG K054I ARTIE KSFO

2224.72 nm / 4120.18 km

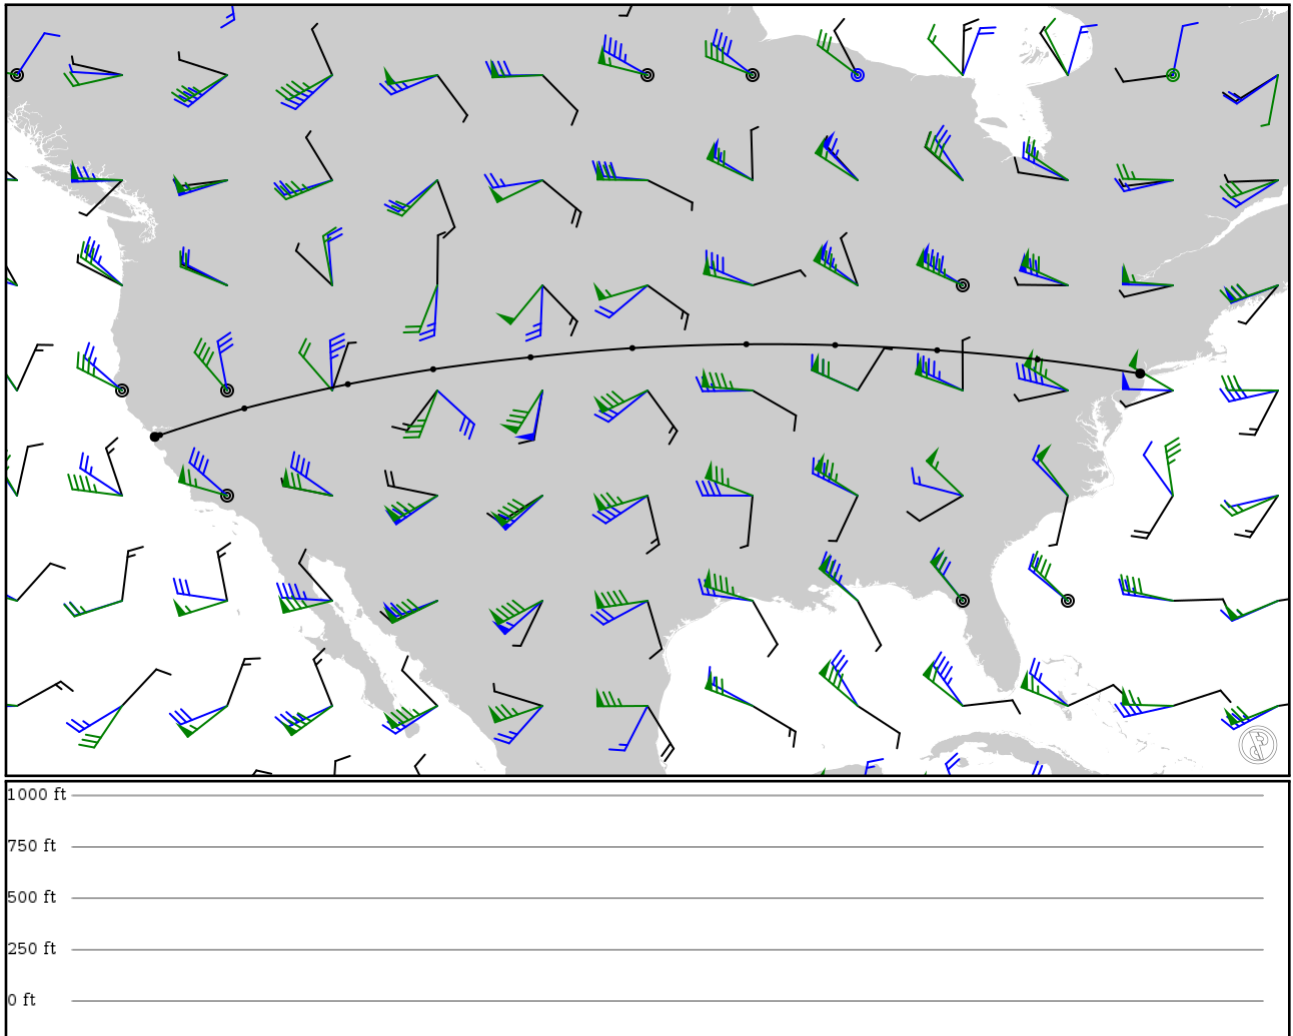

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KEWR	-	40.70281	0 ft	-	-
APT	-	-74.18071	0 m		
HOPMI	-	41.39469	0 ft	230	-
FIX	-	-79.19833	0 m		
HAGVI	-	41.84236	0 ft	222	-
FIX	-	-84.11256	0 m		
FANGU	-	42.09411	0 ft	223	-
FIX	-	-89.10286	0 m		
MUQXU	-	42.13672	0 ft	193	-
FIX	-	-93.44614	0 m		
11194	-	41.94936	0 ft	248	-
FIX	-	-99.02257	0 m		
KD69W	-	41.50000	0 ft	224	-
FIX	-	-104.00000	0 m		
15173	-	40.91474	0 ft	218	-
FIX	-	-108.76408	0 m		
DPG	-	40.18244	0 ft	195	-
NDB	-	-112.93747	0 m		
K054I	-	39.00000	0 ft	244	-
FIX	-	-118.00000	0 m		
ARTIE	-	37.69736	0 ft	209	-
FIX	-	-122.12492	0 m		
KSFO	-	37.60898	0 ft	13	-
APT	-	-122.38220	0 m		

KEWR

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 17 ft / 5 m
Location: 40.693600 -74.168600
Magnetic Var: 12.651 W

METAR

KEWR 130451Z 21005KT 10SM FEW020 FEW049 SCT250 09/07 A3002 RMK A02 SLP165 T00940072 401330089 \$

TAF

TAF AMD KEWR 130231Z 1303/1406 17005KT P6SM FEW025 SCT050 SCT250 FM130500 22004KT P6SM FEW050 SCT250 FM131400 2200

Frequencies

REC - 115.70 MHz - D-ATIS	REC - 134.82 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.85 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - NEWARK GROUND	GND - 126.15 MHz - NEWARK GROUND
GND - 132.45 MHz - RAMP CONTROL	TWR - 118.30 MHz - NEWARK TOWER
TWR - 134.05 MHz - NEWARK TOWER	APP - 127.60 MHz - NEW YORK APPROACH
APP - 128.55 MHz - NEW YORK APPROACH	APP - 132.70 MHz - NEW YORK APPROACH
APP - 132.80 MHz - NEW YORK APPROACH	DEP - 119.20 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	11,011 ft	25.75	ASPHALT	2,539 ft	610 ft
	46 m	3,356 m	38.40		774 m	186 m
22R	150 ft	11,011 ft	205.76	ASPHALT	1,440 ft	0 ft
	46 m	3,356 m	218.41		439 m	0 m
04R	150 ft	10,009 ft	25.74	ASPHALT	1,191 ft	299 ft
	46 m	3,051 m	38.39		363 m	91 m
22L	150 ft	10,009 ft	205.75	ASPHALT	1,791 ft	0 ft
	46 m	3,051 m	218.40		546 m	0 m
11	150 ft	6,732 ft	95.00	ASPHALT	0 ft	505 ft
	46 m	2,052 m	107.65		0 m	154 m
29	150 ft	6,732 ft	275.02	ASPHALT	223 ft	0 ft
	46 m	2,052 m	287.67		68 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IEWR	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04R	DME	IEZA	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22L	DME	ILSQ	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22R	DME	IJNN	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04L	LOC-ILS	IEWR	110.75 MHz	18 nm	25.76	-	17 ft
				33 km	38.41		17 m
04R	LOC-ILS	IEZA	108.70 MHz	18 nm	25.75	-	17 ft
				33 km	38.40		17 m
11	LOC-ILS	IGPR	109.15 MHz	18 nm	95.01	-	17 ft
				33 km	107.66		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	LOC-ILS	ILSQ	108.70 MHz	18 nm	205.75	-	17 ft
				33 km	218.40		17 m
22R	LOC-ILS	IJNN	110.75 MHz	18 nm	205.76	-	17 ft
				33 km	218.41		17 m
04L	GS	IEWR	110.75 MHz	10 nm	25.76	3.00	17 ft
				19 km	38.41		17 m
04R	GS	IEZA	108.70 MHz	10 nm	25.75	3.00	17 ft
				19 km	38.40		17 m
11	GS	IGPR	109.15 MHz	10 nm	95.01	3.00	17 ft
				19 km	107.66		17 m
22L	GS	ILSQ	108.70 MHz	10 nm	205.75	3.00	17 ft
				19 km	218.40		17 m
22R	GS	IJNN	110.75 MHz	10 nm	205.76	3.00	17 ft
				19 km	218.41		17 m

KSFO

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 13 ft / 4 m
Location: 37.618500 -122.375000
Magnetic Var: 12.843 E

METAR

KSFO 130456Z 30013KT 10SM FEW006 12/09 A2995 RMK AO2 SLP141 T01220094 \$

TAF

KSFO 130302Z 1303/1406 30014KT P6SM FEW003 FEW009 FM130400 28012KT P6SM FEW003 SCT006 FM130600 26008KT P6SM SCT00

Frequencies

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.05		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.05		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.08		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.88		0 m	136 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m