

# KEWR

Newark Liberty Intl


# KDEN

Denver Intl

2024/06/04 1147Z

KEWR SNOWY V6 SEG V30 PSB J60 JOT J146 LNK J60 HCT V8 ETUDE KDEN

1393.06 nm / 2579.95 km

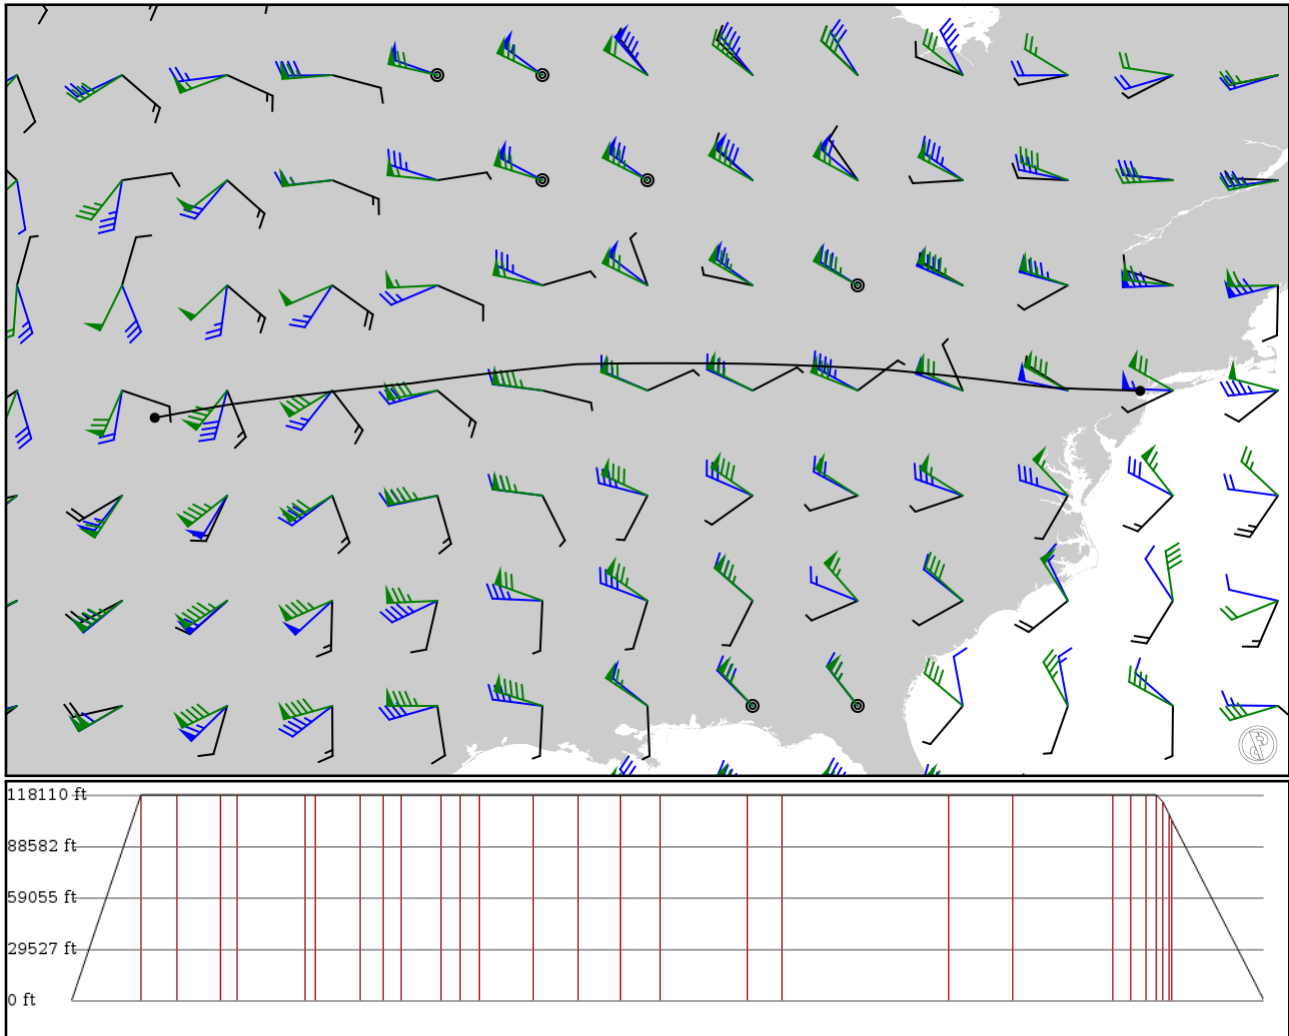

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 36000ft
- Cruise Speed: 305kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KEWR APT	-	40.69250 -74.16870	0 ft 0 m	-	Newark Liberty Intl
SNOWY FIX	-	40.75160 -75.96430	36,000 ft 10,973 m	81	-
SEG VOR	V6 AWY-LO	40.79090 -76.88400	36,000 ft 10,973 m	41	SELINSGROVE
PSB VOR	V30 AWY-LO	40.91630 -77.99270	36,000 ft 10,973 m	50	PHILIPSBURG
MIDST FIX	J60 AWY-HI	40.96970 -78.42760	36,000 ft 10,973 m	19	-
TYSUN FIX	J60 AWY-HI	41.16510 -80.15630	36,000 ft 10,973 m	79	-
HAGUD FIX	J60 AWY-HI	41.19220 -80.41610	36,000 ft 10,973 m	11	-
CANCR FIX	J60 AWY-HI	41.30560 -81.57760	36,000 ft 10,973 m	52	-
DJB VOR	J60 AWY-HI	41.35810 -82.16200	36,000 ft 10,973 m	26	DRYER
JERRI FIX	J60 AWY-HI	41.38380 -82.60340	36,000 ft 10,973 m	19	-
MAYZE FIX	J60 AWY-HI	41.43850 -83.66410	36,000 ft 10,973 m	47	-
NAPOL FIX	J60 AWY-HI	41.46040 -84.15210	36,000 ft 10,973 m	22	-
ASHEN FIX	J60 AWY-HI	41.48050 -84.64680	36,000 ft 10,973 m	22	-
GSH VOR	J60 AWY-HI	41.52520 -86.02800	36,000 ft 10,973 m	62	GOSHEN
HOBAR FIX	J60 AWY-HI	41.54180 -87.20860	36,000 ft 10,973 m	53	-
JOT VOR	J60 AWY-HI	41.54640 -88.31840	36,000 ft 10,973 m	49	JOLIET
VORIN FIX	J146 AWY-HI	41.54800 -89.33640	36,000 ft 10,973 m	45	-
IOW VOR	J146 AWY-HI	41.51900 -91.61330	36,000 ft 10,973 m	102	IOWA CITY
CNOTA FIX	J146 AWY-HI	41.43410 -92.49010	36,000 ft 10,973 m	39	-
LNK VOR	J146 AWY-HI	40.92380 -96.74200	36,000 ft 10,973 m	194	LINCOLN
DRABS FIX	J60 AWY-HI	40.75920 -98.37470	36,000 ft 10,973 m	74	-
HCT VOR	J60 AWY-HI	40.45410 -100.92400	36,000 ft 10,973 m	117	HAYES CENTER
SIJVI FIX	V8 AWY-LO	40.39700 -101.38300	36,000 ft 10,973 m	21	-
ATCAY FIX	V8 AWY-LO	40.35090 -101.74400	36,000 ft 10,973 m	16	-
ASHBY FIX	V8 AWY-LO	40.31720 -102.00200	36,000 ft 10,973 m	11	-
LINVE FIX	V8 AWY-LO	40.29510 -102.16900	34,800 ft 10,607 m	7	-
OGLIE	V8	40.27430	32,600 ft	7	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-LO	-102.32300	9,936 m		
ETUDE	V8	40.26370	31,600 ft	3	-
FIX	AWY-LO	-102.40200	9,632 m		
KDEN	-	39.86100	0 ft	107	Denver Intl
APT	-	-104.67200	0 m		

## KEWR

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 3

Elevation: 17 ft / 5 m  
Location: 40.693600 -74.168600  
Magnetic Var: 12.649 W

## METAR

KEWR 041051Z 08004KT 9SM FEW110 FEW250 24/17 A2998 RMK A02 SLP151 T02390167

## TAF

KEWR 040839Z 0409/0512 07004KT P6SM BKN120 BKN250 FM041300 11006KT P6SM SCT250 FM041800 14010KT P6SM SCT250 FM0500

## Frequencies

REC - 115.70 MHz - D-ATIS	REC - 134.82 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.85 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - NEWARK GROUND	GND - 126.15 MHz - NEWARK GROUND
GND - 132.45 MHz - RAMP CONTROL	TWR - 118.30 MHz - NEWARK TOWER
TWR - 134.05 MHz - NEWARK TOWER	APP - 127.60 MHz - NEW YORK APPROACH
APP - 128.55 MHz - NEW YORK APPROACH	APP - 132.70 MHz - NEW YORK APPROACH
APP - 132.80 MHz - NEW YORK APPROACH	DEP - 119.20 MHz - NEW YORK DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	11,011 ft	25.75	ASPHALT	2,539 ft	610 ft
	46 m	3,356 m	38.40		774 m	186 m
22R	150 ft	11,011 ft	205.76	ASPHALT	1,440 ft	0 ft
	46 m	3,356 m	218.41		439 m	0 m
04R	150 ft	10,009 ft	25.74	ASPHALT	1,191 ft	299 ft
	46 m	3,051 m	38.39		363 m	91 m
22L	150 ft	10,009 ft	205.75	ASPHALT	1,791 ft	0 ft
	46 m	3,051 m	218.40		546 m	0 m
11	150 ft	6,732 ft	95.00	ASPHALT	0 ft	505 ft
	46 m	2,052 m	107.65		0 m	154 m
29	150 ft	6,732 ft	275.02	ASPHALT	223 ft	0 ft
	46 m	2,052 m	287.67		68 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IEWR	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04R	DME	IEZA	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22L	DME	ILSQ	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22R	DME	IJNN	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04L	LOC-ILS	IEWR	110.75 MHz	18 nm	25.76	-	17 ft
				33 km	38.41		17 m
04R	LOC-ILS	IEZA	108.70 MHz	18 nm	25.75	-	17 ft
				33 km	38.40		17 m
11	LOC-ILS	IGPR	109.15 MHz	18 nm	95.01	-	17 ft
				33 km	107.66		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	LOC-ILS	ILSQ	108.70 MHz	18 nm	205.75	-	17 ft
				33 km	218.40		17 m
22R	LOC-ILS	IJNN	110.75 MHz	18 nm	205.76	-	17 ft
				33 km	218.41		17 m
04L	GS	IEWR	110.75 MHz	10 nm	25.76	3.00	17 ft
				19 km	38.41		17 m
04R	GS	IEZA	108.70 MHz	10 nm	25.75	3.00	17 ft
				19 km	38.40		17 m
11	GS	IGPR	109.15 MHz	10 nm	95.01	3.00	17 ft
				19 km	107.66		17 m
22L	GS	ILSQ	108.70 MHz	10 nm	205.75	3.00	17 ft
				19 km	218.40		17 m
22R	GS	IJNN	110.75 MHz	10 nm	205.76	3.00	17 ft
				19 km	218.41		17 m

## KDEN

Region: UNITED STATES  
Timezone: AMERICA/DENVER  
Runways: 6

Elevation: 5,429 ft / 1,655 m  
Location: 39.861000 -104.672000  
Magnetic Var: 7.387 E

## METAR

KDEN 041053Z 25011KT 10SM FEW100 SCT150 BKN220 19/04 A2981 RMK A02 SLP005 T01890044

## TAF

KDEN 041006Z 0410/0512 26012KT P6SM SCT080 BKN140 FM041130 25008KT P6SM FEW080 SCT140 SCT220 FM041600 28014G24KT

## Frequencies

REC - 134.02 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.75 MHz - CLEARANCE DELIVERY	GND - 121.85 MHz - DENVER GROUND
GND - 127.50 MHz - DENVER GROUND	TWR - 132.35 MHz - DENVER TOWER
TWR - 133.30 MHz - DENVER TOWER	TWR - 128.75 MHz - DENVER TOWER
TWR - 135.30 MHz - DENVER TOWER	APP - 119.30 MHz - DENVER APPROACH
APP - 120.35 MHz - DENVER APPROACH	DEP - 126.10 MHz - DENVER DEPARTURE
DEP - 127.05 MHz - DENVER DEPARTURE	DEP - 128.25 MHz - DENVER DEPARTURE
DEP - 128.45 MHz - DENVER DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16R	200 ft	16,016 ft	180.50	CONCRETE	0 ft	410 ft
	61 m	4,882 m	173.11		0 m	125 m
34L	200 ft	16,016 ft	0.50	CONCRETE	0 ft	410 ft
	61 m	4,882 m	353.11		0 m	125 m
16L	151 ft	12,013 ft	180.51	CONCRETE	0 ft	413 ft
	46 m	3,662 m	173.12		0 m	126 m
34R	151 ft	12,013 ft	0.51	CONCRETE	0 ft	394 ft
	46 m	3,662 m	353.12		0 m	120 m
17R	151 ft	12,013 ft	180.53	CONCRETE	0 ft	413 ft
	46 m	3,662 m	173.14		0 m	126 m
35L	151 ft	12,013 ft	0.53	CONCRETE	0 ft	400 ft
	46 m	3,662 m	353.14		0 m	122 m
17L	151 ft	12,013 ft	180.54	CONCRETE	0 ft	404 ft
	46 m	3,662 m	173.16		0 m	123 m
35R	151 ft	12,013 ft	0.54	CONCRETE	0 ft	400 ft
	46 m	3,662 m	353.16		0 m	122 m
07	151 ft	12,013 ft	90.50	CONCRETE	0 ft	377 ft
	46 m	3,662 m	83.11		0 m	115 m
25	151 ft	12,013 ft	270.52	CONCRETE	0 ft	374 ft
	46 m	3,662 m	263.14		0 m	114 m
08	151 ft	12,013 ft	90.54	CONCRETE	0 ft	367 ft
	46 m	3,662 m	83.15		0 m	112 m
26	151 ft	12,013 ft	270.56	CONCRETE	0 ft	400 ft
	46 m	3,662 m	263.18		0 m	122 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	DME	IDZG	111.55 MHz	18 nm	-	-	5,352 ft
				33 km	-		5,352 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	IFUI	108.90 MHz	18 nm 33 km	- -	-	5,345 ft 5,345 m
16L	DME	ILTT	111.10 MHz	18 nm 33 km	- -	-	5,347 ft 5,347 m
16R	DME	IDQQ	111.90 MHz	18 nm 33 km	- -	-	5,311 ft 5,311 m
17L	DME	IBXP	110.15 MHz	18 nm 33 km	- -	-	5,328 ft 5,328 m
17R	DME	IACX	108.50 MHz	18 nm 33 km	- -	-	5,390 ft 5,390 m
25	DME	IERP	111.55 MHz	18 nm 33 km	- -	-	5,352 ft 5,352 m
26	DME	IJOY	108.90 MHz	18 nm 33 km	- -	-	5,300 ft 5,300 m
34L	DME	IDXU	111.90 MHz	18 nm 33 km	- -	-	5,311 ft 5,311 m
34R	DME	IOUF	111.10 MHz	18 nm 33 km	- -	-	5,349 ft 5,349 m
35L	DME	IAQD	108.50 MHz	18 nm 33 km	- -	-	5,421 ft 5,421 m
35R	DME	IDPP	110.15 MHz	18 nm 33 km	- -	-	5,360 ft 5,360 m
07	LOC-ILS	IDZG	111.55 MHz	18 nm 33 km	90.51 83.12	-	5,431 ft 5,431 m
08	LOC-ILS	IFUI	108.90 MHz	18 nm 33 km	90.55 83.16	-	5,431 ft 5,431 m
16L	LOC-ILS	ILTT	111.10 MHz	18 nm 33 km	180.51 173.12	-	5,431 ft 5,431 m
16R	LOC-ILS	IDQQ	111.90 MHz	18 nm 33 km	180.50 173.11	-	5,431 ft 5,431 m
17L	LOC-ILS	IBXP	110.15 MHz	18 nm 33 km	180.53 173.14	-	5,431 ft 5,431 m
17R	LOC-ILS	IACX	108.50 MHz	18 nm 33 km	180.53 173.14	-	5,431 ft 5,431 m
25	LOC-ILS	IERP	111.55 MHz	18 nm 33 km	270.51 263.12	-	5,431 ft 5,431 m
26	LOC-ILS	IJOY	108.90 MHz	18 nm 33 km	270.55 263.16	-	5,431 ft 5,431 m
34L	LOC-ILS	IDXU	111.90 MHz	18 nm 33 km	0.50 353.11	-	5,431 ft 5,431 m
34R	LOC-ILS	IOUF	111.10 MHz	18 nm 33 km	0.51 353.12	-	5,431 ft 5,431 m
35L	LOC-ILS	IAQD	108.50 MHz	18 nm 33 km	0.53 353.14	-	5,431 ft 5,431 m
35R	LOC-ILS	IDPP	110.15 MHz	18 nm 33 km	0.53 353.14	-	5,431 ft 5,431 m
07	GS	IDZG	111.55 MHz	10 nm 19 km	90.51 83.12	3.00	5,431 ft 5,431 m
08	GS	IFUI	108.90 MHz	10 nm 19 km	90.55 83.16	3.00	5,431 ft 5,431 m
16L	GS	ILTT	111.10 MHz	10 nm 19 km	180.51 173.12	3.00	5,431 ft 5,431 m
16R	GS	IDQQ	111.90 MHz	10 nm 19 km	180.50 173.11	3.00	5,431 ft 5,431 m
17L	GS	IBXP	110.15 MHz	10 nm 19 km	180.53 173.14	3.00	5,431 ft 5,431 m
17R	GS	IACX	108.50 MHz	10 nm 19 km	180.53 173.14	3.00	5,431 ft 5,431 m
25	GS	IERP	111.55 MHz	10 nm 19 km	270.51 263.12	3.00	5,431 ft 5,431 m
26	GS	IJOY	108.90 MHz	10 nm	270.55	3.00	5,431 ft



Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	263.16		5,431 m
34L	GS	IDXU	111.90 MHz	10 nm	0.50	3.00	5,431 ft
				19 km	353.11		5,431 m
34R	GS	IOUF	111.10 MHz	10 nm	0.51	3.00	5,431 ft
				19 km	353.12		5,431 m
35L	GS	IAQD	108.50 MHz	10 nm	0.53	3.00	5,431 ft
				19 km	353.14		5,431 m
35R	GS	IDPP	110.15 MHz	10 nm	0.53	3.00	5,431 ft
				19 km	353.14		5,431 m