

KDAB

Daytona Beach Intl


KFLL

Fort Lauderdale-Hollywood Intl

2024/05/18 1736Z

KDAB OAKIE **V3** MLB **V437** TPSTR **V537** TRV KFLL

195.29 nm / 361.67 km

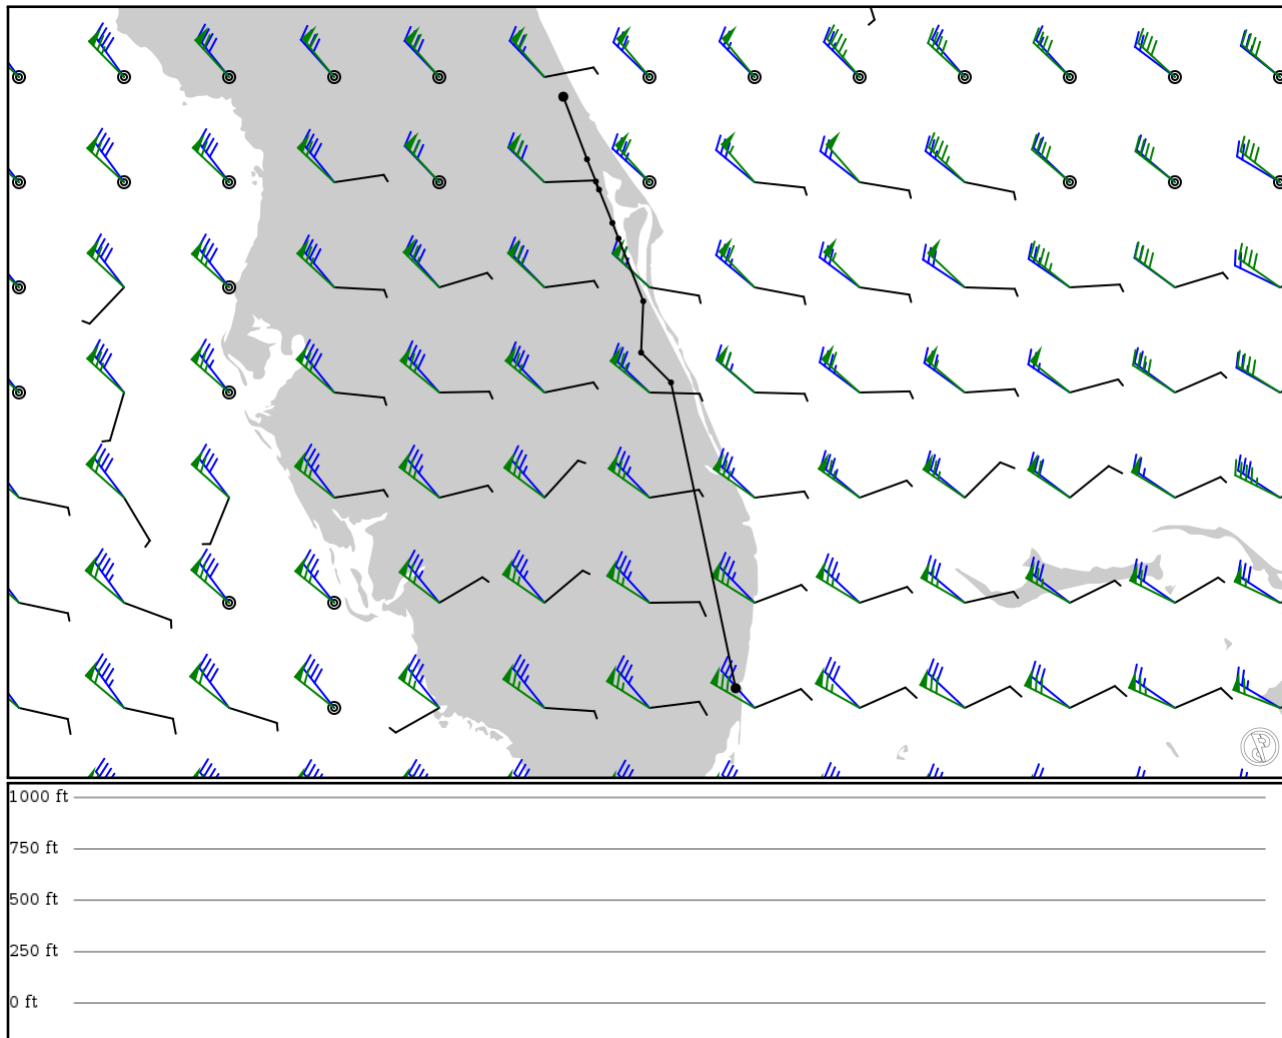

Notes

Requested: KDAB OAKIE V3 MLB V437 TPSTR V537 TRV V3 KFLL

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDAB	-	29.17990	0 ft	-	Daytona Beach Intl
APT	-	-81.05600	0 m	-	
OAKIE	-	28.85120	0 ft	20	-
FIX	-	-80.93120	0 m	-	
FORNI	V3	28.73460	0 ft	7	-
FIX	AWY-LO	-80.88460	0 m	-	
MALET	V3	28.69160	0 ft	2	-
FIX	AWY-LO	-80.86790	0 m	-	
TICCO	V3	28.51680	0 ft	11	-
FIX	AWY-LO	-80.79800	0 m	-	
INDIA	V3	28.43450	0 ft	5	-
FIX	AWY-LO	-80.76540	0 m	-	
MLB	V3	28.10530	0 ft	20	MELBOURNE
VOR	AWY-LO	-80.63530	0 m	-	
TPSTR	V437	27.83530	0 ft	16	-
FIX	AWY-LO	-80.64690	0 m	-	
TRV	V537	27.67840	0 ft	12	TREASURE (VERO BEACH)
VOR	AWY-LO	-80.48970	0 m	-	
KFLL	-	26.07130	0 ft	98	Fort Lauderdale-Hollywood Intl
APT	-	-80.14950	0 m	-	

KDAB

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 34 ft / 10 m
Location: 29.179900 -81.056000
Magnetic Var: 7.239 W

METAR

KDAB 181653Z 24014G21KT 10SM SCT046 SCT075 33/23 A2998 RMK A02 SLP152 T03330228

TAF

TAF KDAB 181130Z 1812/1912 20006KT P6SM FEW200 FM181500 24008KT P6SM SCT050 SCT150 FM181900 20011G19KT P6SM VCTS 9

Frequencies

COM - 122.95 MHz - DAYTONA UNICOM
TWR - 120.70 MHz - DAYTONA TOWER
DEP - 123.90 MHz - DAYTONA DEPARTURE

GND - 121.90 MHz - DAYTONA GROUND
APP - 125.80 MHz - DAYTONA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	151 ft	10,511 ft	65.11	ASPHALT	709 ft	381 ft
	46 m	3,204 m	72.34		216 m	116 m
25R	151 ft	10,511 ft	245.12	ASPHALT	0 ft	200 ft
	46 m	3,204 m	252.36		0 m	61 m
16	151 ft	6,006 ft	157.27	ASPHALT	0 ft	207 ft
	46 m	1,831 m	164.51		0 m	63 m
34	151 ft	6,006 ft	337.27	ASPHALT	0 ft	203 ft
	46 m	1,831 m	344.51		0 m	62 m
07R	98 ft	3,199 ft	65.04	ASPHALT	0 ft	0 ft
	30 m	975 m	72.28		0 m	0 m
25L	98 ft	3,199 ft	245.04	ASPHALT	0 ft	0 ft
	30 m	975 m	252.28		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	DME	IDBF	109.70 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
07L	LOC-ILS	IDAB	109.70 MHz	18 nm	65.12	-	27 ft
				33 km	72.36		27 m
25R	LOC-ILS	IDBF	109.70 MHz	18 nm	245.11	-	34 ft
				33 km	252.35		34 m
07L	GS	IDAB	109.70 MHz	10 nm	65.22	3.00	26 ft
				19 km	72.46		26 m
25R	GS	IDBF	109.70 MHz	10 nm	245.22	3.00	34 ft
				19 km	252.46		34 m

KFLL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 65 ft / 20 m
Location: 26.071300 -80.149500
Magnetic Var: 7.392 W

METAR

KFLL 181653Z 17009G19KT 10SM SCT040 SCT250 34/24 A2996 RMK A02 SLP145 T03440239

TAF

TAF AMD KFLL 181456Z 1815/1918 17011KT P6SM FEW030 SCT050 FM181800 15012G19KT P6SM VCTS SCT030CB BKN050 FM190000 1

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m