

KIAD

Washington Dulles Intl


KDTW

Detroit Metro International Airport

2024/05/16 0823Z

KIAD IHD **J518** SRPEN KDTW

333.30 nm / 617.27 km

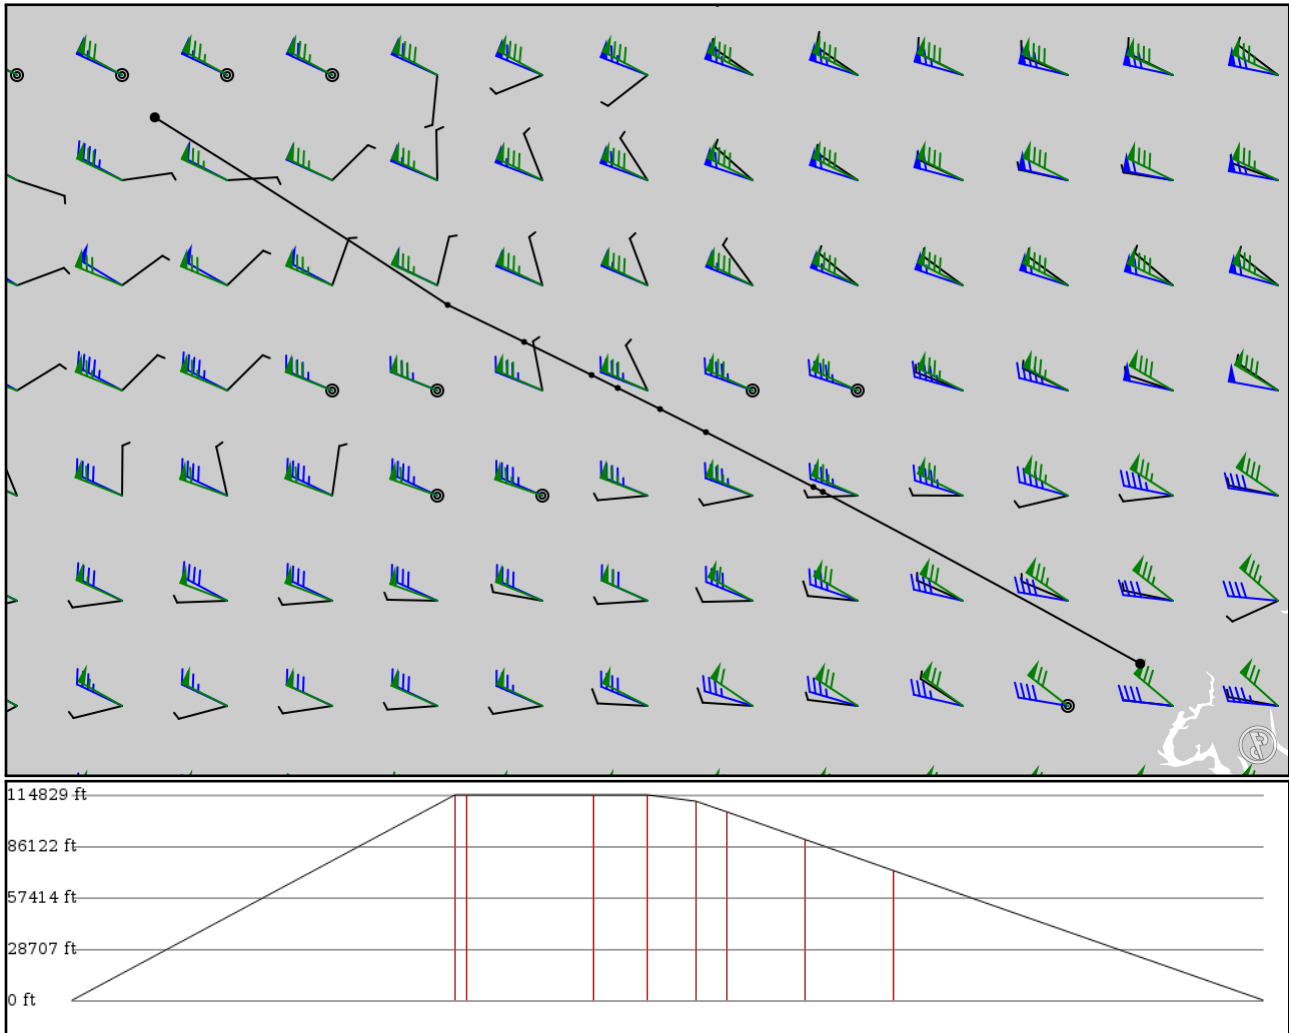

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KIAD	-	38.94770	0 ft	-		Washington Dulles Intl
APT	-	-77.46090	0 m			
IHD	-	39.97420	35,000 ft	107		INDIAN HEAD
VOR	-	-79.35840	10,668 m			
LEJOY	J518	40.00340	35,000 ft	3	-	
FIX	AWY-HI	-79.41490	10,668 m			
AVERE	J518	40.33100	35,000 ft	35	-	
FIX	AWY-HI	-80.05730	10,668 m			
KODIE	J518	40.46890	35,000 ft	15	-	
FIX	AWY-HI	-80.33150	10,668 m			
KOZAR	J518	40.59500	33,900 ft	13	-	
FIX	AWY-HI	-80.58470	10,333 m			
LIVER	J518	40.67230	32,100 ft	8	-	
FIX	AWY-HI	-80.74080	9,784 m			
LEPEW	J518	40.87030	27,400 ft	21	-	
FIX	AWY-HI	-81.14430	8,352 m			
SRPEN	J518	41.09140	22,100 ft	24	-	
FIX	AWY-HI	-81.60140	6,736 m			
KDTW	-	42.21220	0 ft	103		Detroit Metro International Airport
APT	-	-83.35260	0 m			

KIAD

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 312 ft / 95 m
Location: 38.947700 -77.460900
Magnetic Var: 10.664 W

METAR

KIAD 160752Z 00000KT 9SM CLR 14/13 A2973 RMK AO2 SLP068 T01390128

TAF

KIAD 160524Z 1606/1712 34003KT P6SM SCT250 FM160800 35005KT 5SM BR FEW050 SCT250 FM161300 34007KT P6SM SCT090 BKN

Frequencies

COM - 122.95 MHz - UNICOM	REC - 134.85 MHz - D-ATIS
CLD - 135.70 MHz - CLEARANCE DELIVERY	GND - 121.62 MHz - DULLES GROUND
GND - 121.90 MHz - DULLES GROUND	TWR - 120.10 MHz - DULLES TOWER
TWR - 120.25 MHz - DULLES TOWER	TWR - 134.42 MHz - DULLES TOWER
APP - 120.45 MHz - POTOMAC APPROACH	APP - 126.10 MHz - POTOMAC APPROACH
APP - 128.52 MHz - POTOMAC APPROACH	DEP - 126.65 MHz - POTOMAC DEPARTURE
DEP - 125.05 MHz - POTOMAC DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	151 ft	9,408 ft	0.64	CONCRETE	0 ft	404 ft
	46 m	2,868 m	11.30		0 m	123 m
19R	151 ft	9,408 ft	180.64	CONCRETE	0 ft	404 ft
	46 m	2,868 m	191.30		0 m	123 m
01C	151 ft	11,510 ft	0.65	CONCRETE	0 ft	407 ft
	46 m	3,508 m	11.31		0 m	124 m
19C	151 ft	11,510 ft	180.65	CONCRETE	0 ft	43 ft
	46 m	3,508 m	191.31		0 m	13 m
01R	151 ft	11,510 ft	0.66	CONCRETE	0 ft	43 ft
	46 m	3,508 m	11.33		0 m	13 m
19L	151 ft	11,510 ft	180.66	CONCRETE	0 ft	387 ft
	46 m	3,508 m	191.33		0 m	118 m
12	151 ft	10,513 ft	110.71	CONCRETE	0 ft	20 ft
	46 m	3,204 m	121.37		0 m	6 m
30	151 ft	10,513 ft	290.73	CONCRETE	0 ft	387 ft
	46 m	3,204 m	301.39		0 m	118 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01R	DME	IIAD	110.10 MHz	18 nm	-	-	314 ft
				33 km	-		314 m
19L	DME	ISGC	110.10 MHz	18 nm	-	-	314 ft
				33 km	-		314 m
19R	DME	IISU	110.75 MHz	18 nm	-	-	313 ft
				33 km	-		313 m
01C	LOC-ILS	IOSZ	111.30 MHz	18 nm	0.65	-	312 ft
				33 km	11.31		312 m
01R	LOC-ILS	IIAD	110.10 MHz	18 nm	0.67	-	312 ft
				33 km	11.33		312 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	LOC-ILS	IAJU	109.30 MHz	18 nm	110.74	-	312 ft
				33 km	121.40		312 m
19C	LOC-ILS	IDLX	111.30 MHz	18 nm	180.65	-	312 ft
				33 km	191.31		312 m
19L	LOC-ILS	ISGC	110.10 MHz	18 nm	180.67	-	312 ft
				33 km	191.33		312 m
19R	LOC-ILS	IISU	110.75 MHz	18 nm	180.58	-	312 ft
				33 km	191.24		312 m
01L	LOC-ILS	IOIU	110.75 MHz	18 nm	0.58	-	312 ft
				33 km	11.24		312 m
01C	GS	IOSZ	111.30 MHz	10 nm	0.65	3.00	312 ft
				19 km	11.31		312 m
01R	GS	IIAD	110.10 MHz	10 nm	0.67	3.00	312 ft
				19 km	11.33		312 m
12	GS	IAJU	109.30 MHz	10 nm	110.74	3.00	312 ft
				19 km	121.40		312 m
19C	GS	IDLX	111.30 MHz	10 nm	180.65	3.00	312 ft
				19 km	191.31		312 m
19L	GS	ISGC	110.10 MHz	10 nm	180.67	3.00	312 ft
				19 km	191.33		312 m
19R	GS	IISU	110.75 MHz	10 nm	180.58	3.00	312 ft
				19 km	191.24		312 m
01L	GS	IOIU	110.75 MHz	10 nm	0.58	3.00	312 ft
				19 km	11.24		312 m

KDTW

Region: UNITED STATES
Timezone: AMERICA/DETROIT
Runways: 6

Elevation: 645 ft / 197 m
Location: 42.212200 -83.352600
Magnetic Var: 7.491 W

METAR

KDTW 160753Z 02005KT 10SM CLR 12/06 A2985 RMK A02 SLP105 T01170061

TAF

TAF KDTW 160520Z 1606/1712 03008KT P6SM SCT250 FM160900 02005KT P6SM SCT045 BKN200 TEMPO 1609/1612 6SM HZ SCT025 B

Frequencies

REC - 118.12 MHz - ATIS	REC - 133.67 MHz - ATIS
COM - 122.95 MHz - UNICOM	CLD - 120.65 MHz - CLEARANCE DELIVERY
GND - 119.25 MHz - METRO GROUND	GND - 119.45 MHz - METRO GROUND
GND - 121.80 MHz - METRO GROUND	GND - 132.72 MHz - METRO GROUND
TWR - 118.40 MHz - METRO TOWER	TWR - 128.12 MHz - METRO TOWER
TWR - 128.75 MHz - METRO TOWER	TWR - 135.00 MHz - METRO TOWER
APP - 124.05 MHz - DETROIT APPROACH	APP - 125.15 MHz - DETROIT APPROACH
DEP - 118.95 MHz - DETROIT DEPARTURE	DEP - 125.52 MHz - DETROIT DEPARTURE
DEP - 132.02 MHz - DETROIT DEPARTURE	DEP - 134.30 MHz - DETROIT DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	200 ft	12,011 ft	28.61	CONCRETE	512 ft	397 ft
	61 m	3,661 m	36.10		156 m	121 m
22L	200 ft	12,011 ft	208.63	CONCRETE	0 ft	433 ft
	61 m	3,661 m	216.12		0 m	132 m
03R	151 ft	10,005 ft	28.61	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.10		0 m	122 m
21L	151 ft	10,005 ft	208.62	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.11		0 m	122 m
04L	151 ft	10,003 ft	28.58	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.07		0 m	122 m
22R	151 ft	10,003 ft	208.59	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.08		0 m	122 m
09L	151 ft	8,687 ft	88.70	CONCRETE	0 ft	400 ft
	46 m	2,648 m	96.19		0 m	122 m
27R	151 ft	8,687 ft	268.72	CONCRETE	0 ft	400 ft
	46 m	2,648 m	276.22		0 m	122 m
03L	150 ft	8,505 ft	28.62	CONCRETE	0 ft	400 ft
	46 m	2,592 m	36.12		0 m	122 m
21R	150 ft	8,505 ft	208.63	CONCRETE	0 ft	397 ft
	46 m	2,592 m	216.13		0 m	121 m
09R	151 ft	8,480 ft	88.71	CONCRETE	0 ft	400 ft
	46 m	2,585 m	96.20		0 m	122 m
27L	151 ft	8,480 ft	268.73	CONCRETE	0 ft	400 ft
	46 m	2,585 m	276.22		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
--------	------	-------	-----------	-------	-------------------------	-------	-----------

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHJT	111.95 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
04R	DME	IDTW	110.70 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
22L	DME	IDWC	110.70 MHz	18 nm	-	-	646 ft
				33 km	-		646 m
03R	LOC-ILS	IHUU	111.50 MHz	18 nm	28.62	-	645 ft
				33 km	36.11		645 m
04L	LOC-ILS	IHJT	111.95 MHz	18 nm	28.59	-	645 ft
				33 km	36.08		645 m
04R	LOC-ILS	IDTW	110.70 MHz	18 nm	28.63	-	645 ft
				33 km	36.12		645 m
21L	LOC-ILS	IEJR	111.50 MHz	18 nm	208.62	-	645 ft
				33 km	216.11		645 m
22L	LOC-ILS	IDWC	110.70 MHz	18 nm	208.63	-	645 ft
				33 km	216.12		645 m
22R	LOC-ILS	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
27L	LOC-ILS	IEPA	110.15 MHz	18 nm	268.72	-	645 ft
				33 km	276.21		645 m
27R	LOC-ILS	IDMI	108.50 MHz	18 nm	268.71	-	645 ft
				33 km	276.20		645 m
22R	LOC-LOC	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
03R	GS	IHUU	111.50 MHz	10 nm	28.62	3.00	645 ft
				19 km	36.11		645 m
04L	GS	IHJT	111.95 MHz	10 nm	28.59	3.00	645 ft
				19 km	36.08		645 m
04R	GS	IDTW	110.70 MHz	10 nm	28.63	3.00	645 ft
				19 km	36.12		645 m
21L	GS	IEJR	111.50 MHz	10 nm	208.62	3.00	645 ft
				19 km	216.11		645 m
22L	GS	IDWC	110.70 MHz	10 nm	208.63	2.85	645 ft
				19 km	216.12		645 m
22R	GS	IJKI	111.95 MHz	10 nm	208.59	3.00	645 ft
				19 km	216.08		645 m
27L	GS	IEPA	110.15 MHz	10 nm	268.72	3.00	645 ft
				19 km	276.21		645 m
27R	GS	IDMI	108.50 MHz	10 nm	268.71	3.00	645 ft
				19 km	276.20		645 m