


2024/06/11 1039Z

KPDX CIDUG KSEA

112.42 nm / 208.20 km

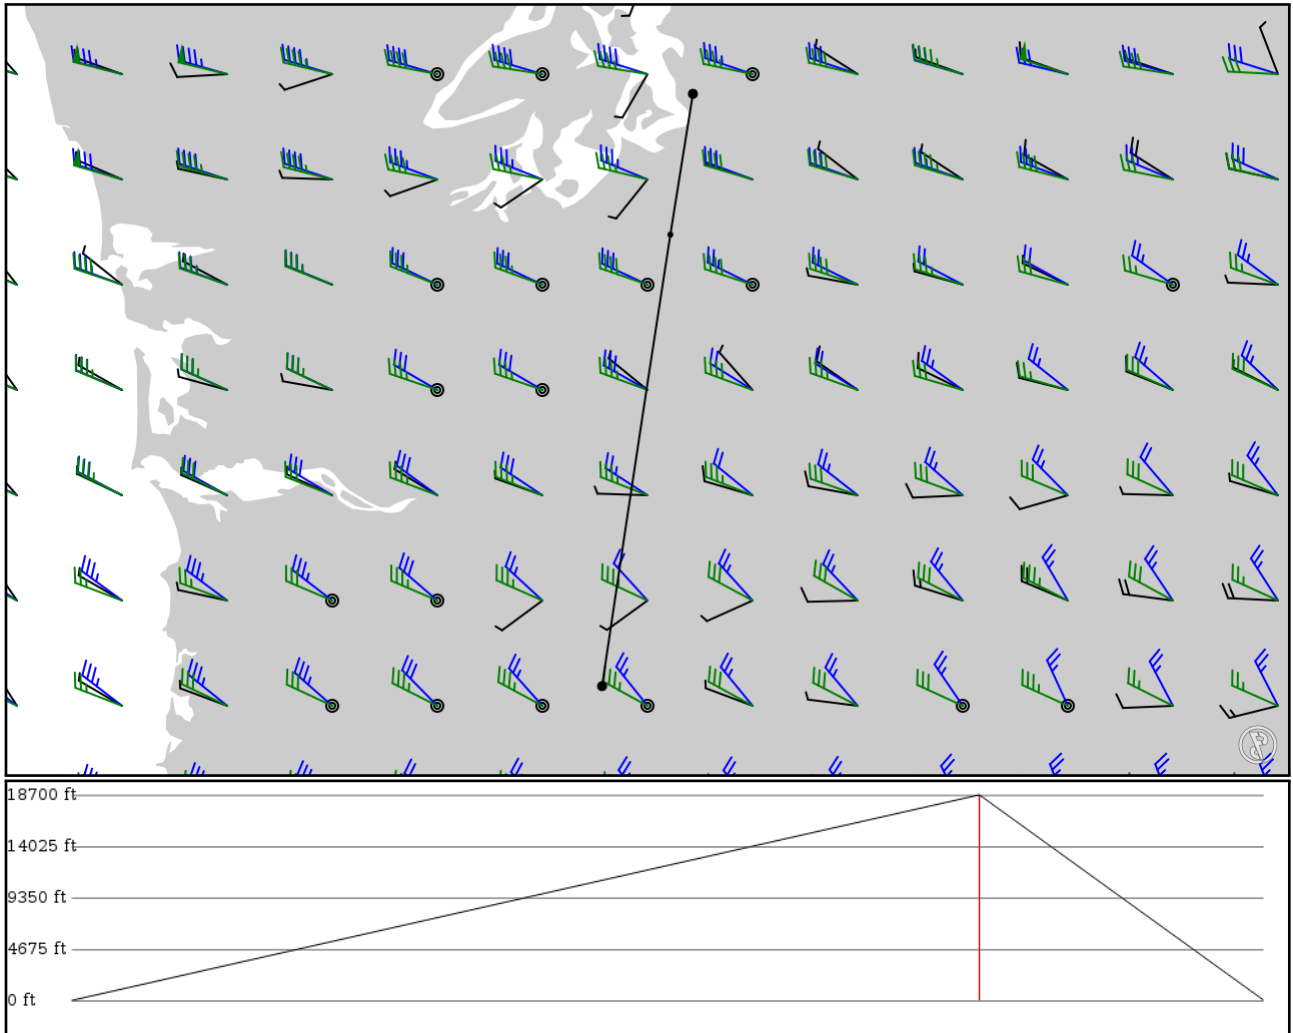

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KPDX	-	45.58870	0 ft	-	Portland Intl
APT	-	-122.59800	0 m		
CIDUG	-	47.00780	5,700 ft	85	-
FIX	-	-122.38300	1,737 m		
KSEA	-	47.45020	0 ft	26	Seattle-Tacoma Intl
APT	-	-122.31200	0 m		

KPDX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 31 ft / 9 m
Location: 45.588700 -122.598000
Magnetic Var: 14.442 E

METAR

KPDX 110953Z 15003KT 10SM CLR 17/09 A2999 RMK A02 SLP155 T01670089

TAF

TAF AMD KPDX 110905Z 1109/1206 VRB04KT P6SM SCT120 FM111300 VRB04KT P6SM SCT020 FM111600 29007KT P6SM SCT020 BKN0

Frequencies

REC - 128.35 MHz - D-ATIS	COM - 122.95 MHz - PORTLAND UNICOM
GND - 121.90 MHz - PORTLAND GROUND	GND - 132.27 MHz - PORTLAND GROUND
TWR - 118.70 MHz - PORTLAND TOWER	TWR - 123.77 MHz - PORTLAND TOWER
CLD - 120.12 MHz - PORTLAND CLEARANCE DELIVERY	DEP - 118.10 MHz - PORTLAND DEPARTURE
DEP - 124.35 MHz - PORTLAND DEPARTURE	DEP - 127.85 MHz - PORTLAND DEPARTURE
APP - 118.10 MHz - PORTLAND APPROACH	APP - 124.35 MHz - PORTLAND APPROACH
APP - 126.90 MHz - PORTLAND APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	150 ft	9,810 ft	119.09	ASPHALT	1,296 ft	397 ft
	46 m	2,990 m	104.65		395 m	121 m
28R	150 ft	9,810 ft	299.12	ASPHALT	538 ft	400 ft
	46 m	2,990 m	284.68		164 m	122 m
10R	150 ft	10,981 ft	119.08	CONCRETE	0 ft	397 ft
	46 m	3,347 m	104.64		0 m	121 m
28L	150 ft	10,981 ft	299.10	CONCRETE	0 ft	400 ft
	46 m	3,347 m	284.66		0 m	122 m
03	150 ft	5,994 ft	44.92	ASPHALT	0 ft	0 ft
	46 m	1,827 m	30.48		0 m	0 m
21	150 ft	5,994 ft	224.94	ASPHALT	0 ft	0 ft
	46 m	1,827 m	210.49		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	IVDG	111.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
10R	DME	IPDX	110.50 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
21	DME	IGPO	108.90 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
28L	DME	IJMJ	110.50 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
28R	DME	IIAP	111.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
10L	LOC-ILS	IVDG	111.30 MHz	18 nm	119.12	-	30 ft
				33 km	104.68		30 m
10R	LOC-ILS	IPDX	110.50 MHz	18 nm	119.09	-	30 ft
				33 km	104.65		30 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	IJMJ	110.50 MHz	18 nm	299.09	-	30 ft
				33 km	284.65		30 m
28R	LOC-ILS	IIAP	111.30 MHz	18 nm	299.11	-	30 ft
				33 km	284.67		30 m
21	LOC-LOC	IGPO	108.90 MHz	18 nm	224.93	-	30 ft
				33 km	210.49		30 m
10L	GS	IVDG	111.30 MHz	10 nm	119.11	3.00	30 ft
				19 km	104.67		30 m
10R	GS	IPDX	110.50 MHz	10 nm	119.09	3.00	30 ft
				19 km	104.65		30 m
28L	GS	IJMJ	110.50 MHz	10 nm	299.09	3.00	30 ft
				19 km	284.65		30 m
28R	GS	IIAP	111.30 MHz	10 nm	299.11	3.00	30 ft
				19 km	284.67		30 m

KSEA

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 432 ft / 132 m
Location: 47.450200 -122.312000
Magnetic Var: 14.762 E

METAR

KSEA 110953Z 18005KT 10SM BKN140 14/09 A2995 RMK AO2 SLP148 T01440089

TAF

KSEA 110900Z 1109/1212 VRB03KT P6SM BKN100 FM111500 20010KT P6SM -SHRADZ SCT035 OVC050 FM111700 22015G24KT P6SM V

Frequencies

REC - 118.00 MHz - SEATTLE ATIS	CLD - 128.00 MHz - SEATTLE CLEARANCE
GND - 121.70 MHz - SEATTLE GROUND	TWR - 119.90 MHz - SEATTLE TOWER
TWR - 120.95 MHz - SEATTLE TOWER	APP - 133.65 MHz - SEATTLE APPROACH
DEP - 120.10 MHz - SEATTLE DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	11,904 ft	180.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	165.59		0 m	122 m
34R	151 ft	11,904 ft	0.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	345.58		0 m	122 m
16C	151 ft	9,428 ft	180.34	CONCRETE	0 ft	400 ft
	46 m	2,874 m	165.58		0 m	122 m
34C	151 ft	9,428 ft	0.34	CONCRETE	0 ft	397 ft
	46 m	2,874 m	345.58		0 m	121 m
16R	151 ft	8,502 ft	180.34	CONCRETE	0 ft	200 ft
	46 m	2,591 m	165.58		0 m	61 m
34L	151 ft	8,502 ft	0.34	CONCRETE	0 ft	197 ft
	46 m	2,591 m	345.58		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	ISZI	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
16L	DME	ISNQ	110.30 MHz	18 nm	-	-	369 ft
				33 km	-		369 m
16R	DME	ICJL	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34C	DME	ITUC	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
34L	DME	IBEJ	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34R	DME	ISEA	110.30 MHz	18 nm	-	-	469 ft
				33 km	-		469 m
16C	LOC-ILS	ISZI	111.70 MHz	18 nm	180.34	-	355 ft
				33 km	165.58		355 m
16L	LOC-ILS	ISNQ	110.30 MHz	18 nm	180.34	-	338 ft
				33 km	165.58		338 m
16R	LOC-ILS	ICJL	110.75 MHz	18 nm	180.34	-	410 ft
				33 km	165.57		410 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34C	LOC-ILS	ITUC	111.70 MHz	18 nm	0.34	-	422 ft
				33 km	345.58		422 m
34L	LOC-ILS	IBEJ	110.75 MHz	18 nm	0.34	-	433 ft
				33 km	345.57		433 m
34R	LOC-ILS	ISEA	110.30 MHz	18 nm	0.34	-	428 ft
				33 km	345.58		428 m
16C	GS	ISZI	111.70 MHz	10 nm	180.67	3.00	418 ft
				19 km	165.91		418 m
16L	GS	ISNQ	110.30 MHz	10 nm	180.69	3.00	425 ft
				19 km	165.92		425 m
16R	GS	ICJL	110.75 MHz	10 nm	180.67	3.00	410 ft
				19 km	165.91		410 m
34C	GS	ITUC	111.70 MHz	10 nm	0.67	3.00	367 ft
				19 km	345.91		367 m
34L	GS	IBEJ	110.75 MHz	10 nm	0.67	3.00	360 ft
				19 km	345.91		360 m
34R	GS	ISEA	110.30 MHz	10 nm	0.69	2.75	355 ft
				19 km	345.92		355 m