

SVMI

Maiquetia Simon Bolivar Intl


KMIA

Miami Intl

2024/05/03 0109Z

SVMI BELLO **UA554** AGMEX **UL304** J0SES **Y586** FORST **Y589** FOWEE KMIA

1202.06 nm / 2226.21 km

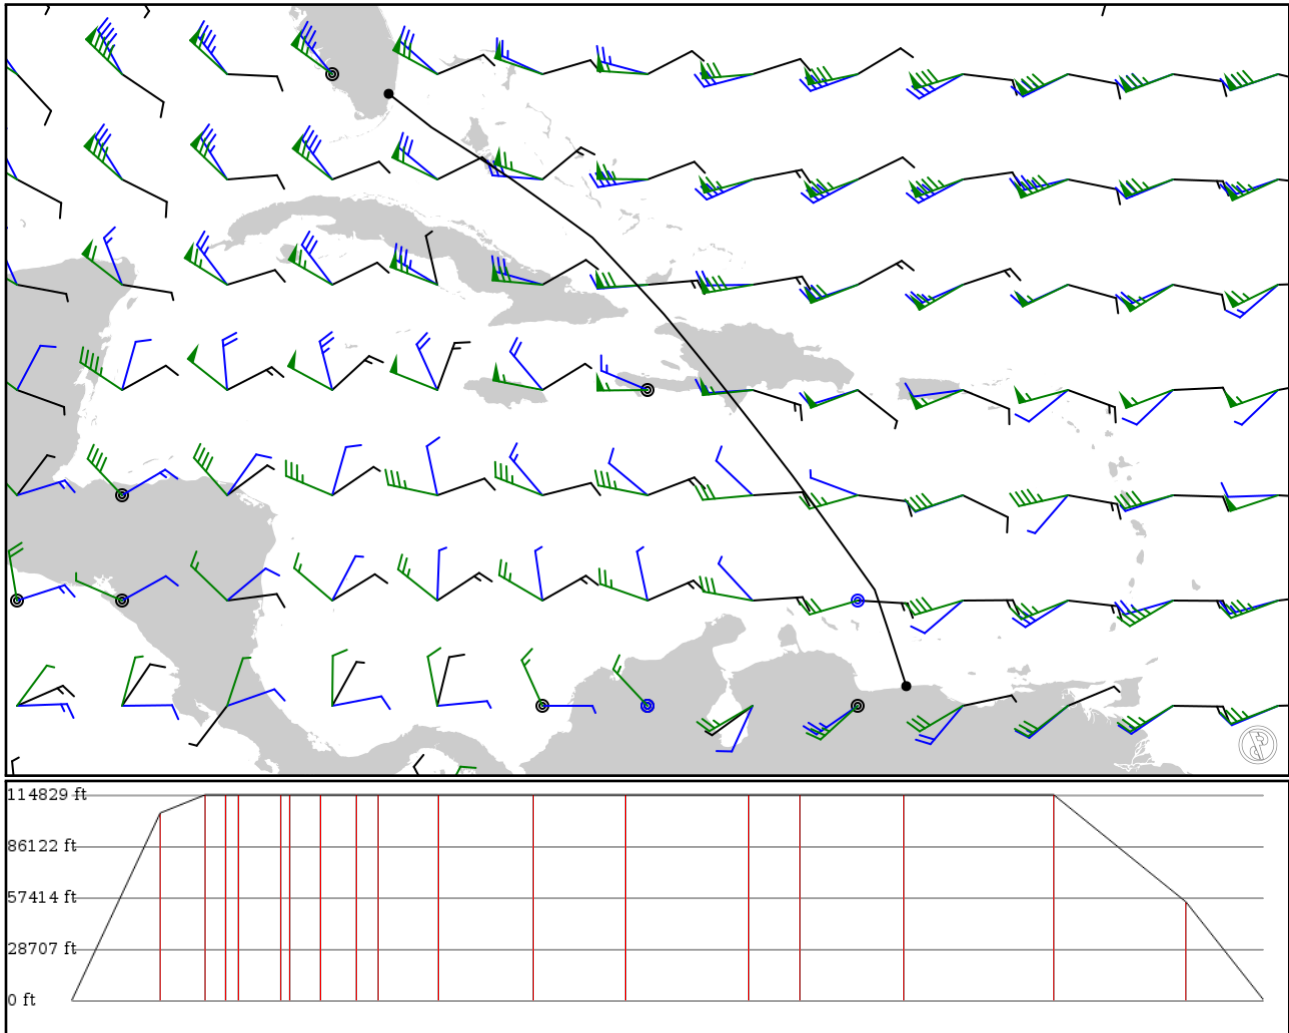

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
SVMI APT	-	10.60320 -66.99040	0 ft 0 m	-	Maiquetia Simon Bolivar Intl
BELLO FIX	-	12.02390 -67.44920	31,900 ft 9,723 m	89	-
KABON FIX	UA554 AWY-HI	12.74580 -67.68940	35,000 ft 10,668 m	45	-
AGMEX FIX	UA554 AWY-HI	13.07500 -67.80170	35,000 ft 10,668 m	20	-
REVOK FIX	UL304 AWY-HI	13.24830 -67.92500	35,000 ft 10,668 m	12	-
OLAXA FIX	UL304 AWY-HI	13.82830 -68.34000	35,000 ft 10,668 m	42	-
PITOS FIX	UL304 AWY-HI	13.96000 -68.43330	35,000 ft 10,668 m	9	-
ALIMI FIX	UL304 AWY-HI	14.37830 -68.73500	35,000 ft 10,668 m	30	-
EBKUT FIX	UL304 AWY-HI	14.87670 -69.09500	35,000 ft 10,668 m	36	-
NOTAM FIX	UL304 AWY-HI	15.18000 -69.31500	35,000 ft 10,668 m	22	-
IRGUT FIX	UL304 AWY-HI	16.00000 -69.91470	35,000 ft 10,668 m	60	-
RODBU FIX	UL304 AWY-HI	17.28690 -70.91280	35,000 ft 10,668 m	96	-
ETBOD FIX	UL304 AWY-HI	18.51670 -71.88330	35,000 ft 10,668 m	92	-
JOSES FIX	UL304 AWY-HI	20.14420 -73.21820	35,000 ft 10,668 m	123	-
SABRE FIX	Y586 AWY-HI	20.80920 -73.83220	35,000 ft 10,668 m	52	-
FORST FIX	Y586 AWY-HI	22.10970 -75.05530	35,000 ft 10,668 m	103	-
ZWICK FIX	Y589 AWY-HI	23.66090 -77.20930	35,000 ft 10,668 m	151	-
FOWEE FIX	Y589 AWY-HI	24.93710 -79.19250	16,800 ft 5,121 m	132	-
KMIA APT	-	25.79620 -80.28970	0 ft 0 m	78	Miami Intl

SVMI

Region: VENEZUELA
Timezone: AMERICA/CARACAS
Runways: 2

Elevation: 234 ft / 71 m
Location: 10.603200 -66.990400
Magnetic Var: 12.870 W

METAR

SVMI 030000Z 36003KT 9999 SCT016 SCT100 29/24 Q1006

TAF

TAF SVMI 021600Z 0218/0318 09005KT 9999 SCT080 TX30/0218Z TN22/0308Z TEMPO 0218/0222 11005KT 9000 -DZ SCT080 BKN0

Frequencies

CLD - 119.50 MHz - CLEARANCE DELIVERY
TWR - 118.40 MHz - MAIQUETIA TOWER
DEP - 120.10 MHz - MAIQUETIA DEPARTURE
GND - 121.90 MHz - MAIQUETIA GROUND
APP - 120.40 MHz - MAIQUETIA APPROACH
REC - 132.85 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	151 ft	11,494 ft	88.13	ASPHALT	0 ft	187 ft
	46 m	3,503 m	101.00		0 m	57 m
28	151 ft	11,494 ft	268.13	ASPHALT	0 ft	187 ft
	46 m	3,503 m	281.00		0 m	57 m
09	151 ft	9,523 ft	75.94	ASPHALT	0 ft	0 ft
	46 m	2,903 m	88.81		0 m	0 m
27	151 ft	9,523 ft	255.95	ASPHALT	0 ft	0 ft
	46 m	2,903 m	268.82		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	DME	IMIQ	110.10 MHz	18 nm	-	-	235 ft
				33 km	-		235 m
10	LOC-ILS	IMIQ	110.10 MHz	18 nm	87.90	-	235 ft
				33 km	100.77		235 m
10	GS	IMIQ	110.10 MHz	10 nm	88.29	3.00	235 ft
				19 km	101.16		235 m

KMIA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 11 ft / 3 m
Location: 25.796200 -80.289700
Magnetic Var: 7.271 W

METAR

KMIA 022353Z 08013G18KT 10SM FEW030 26/19 A2992 RMK A02 SLP133 T02610194 10294 20261 53007 \$

TAF

TAF KMIA 022320Z 0300/0406 08010KT P6SM FEW030 SCT050 FM030500 09006KT P6SM SCT030 FM031300 09010KT P6SM SCT030 BKN050

Frequencies

REC - 119.15 MHz - D-ATIS	REC - 133.67 MHz - D-ATIS
COM - 123.00 MHz - UNICOM	CLD - 135.35 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - MIAMI GROUND	GND - 127.50 MHz - MIAMI GROUND
TWR - 118.30 MHz - MIAMI TOWER	TWR - 123.90 MHz - MIAMI TOWER
APP - 120.50 MHz - MIAMI APPROACH	APP - 124.85 MHz - MIAMI APPROACH
APP - 125.75 MHz - MIAMI APPROACH	DEP - 119.45 MHz - MIAMI DEPARTURE
DEP - 125.50 MHz - MIAMI DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.64		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.66		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.65		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.66		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.65		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.66		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.88		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.89		289 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.87		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.87		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.63		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.63		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.87		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.87		4 m