

EKAH

Aarhus


EKYT

Aalborg

2024/06/07 0811Z

EKAH AAL EKYT

56.79 nm / 105.17 km

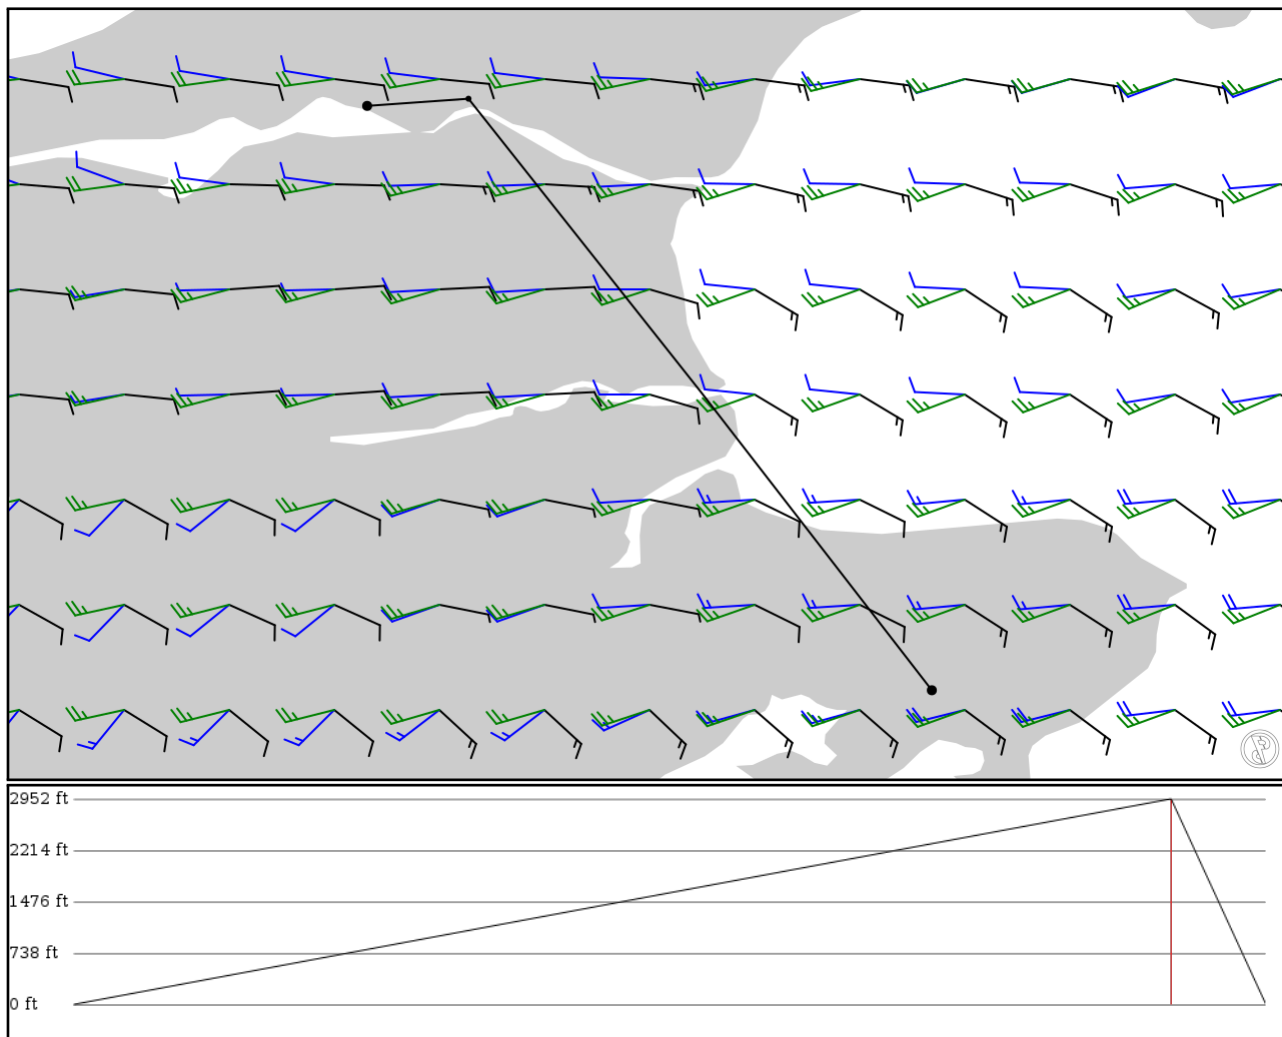

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EKAH	-	56.30430	0 ft	-	Aarhus
APT	-	10.61940	0 m		
AAL	-	57.10390	900 ft	52	AALBORG VOR-DME
DME	-	9.99281	274 m		
EKYT	-	57.09420	0 ft	4	Aalborg
APT	-	9.85574	0 m		

EKAH

Region: DENMARK / FAROE ISLANDS
Timezone: EUROPE/COPENHAGEN
Runways: 2

Elevation: 82 ft / 25 m
Location: 56.304300 10.619400
Magnetic Var: 4.036 E

METAR

EKAH 070750Z AUTO 23005KT 170V270 9999 SCT032/// OVC180/// 14/05 Q1015

TAF

TAF EKAH 070500Z 0706/0806 VRB03KT 9999 SCT030 BECMG 0706/0708 23012KT TEMPO 0706/0710 SCT030CB TEMPO 0710/0720 S

Frequencies

TWR - 118.52 MHz - AARHUS TOWER

APP - 119.27 MHz - AARHUS APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	75 ft	9,081 ft	100.30	ASPHALT	0 ft	0 ft
	23 m	2,768 m	96.26		0 m	0 m
28R	75 ft	9,081 ft	280.34	ASPHALT	0 ft	0 ft
	23 m	2,768 m	276.30		0 m	0 m
10R	148 ft	8,837 ft	100.29	ASPHALT	0 ft	938 ft
	45 m	2,693 m	96.26		0 m	286 m
28L	148 ft	8,837 ft	280.33	ASPHALT	0 ft	738 ft
	45 m	2,693 m	276.29		0 m	225 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	DME	TR	111.10 MHz	18 nm	-	-	79 ft
				33 km	-		79 m
10R	LOC-ILS	AAR	111.90 MHz	18 nm	100.33	-	82 ft
				33 km	96.29		82 m
28L	LOC-ILS	TR	111.10 MHz	18 nm	280.29	-	82 ft
				33 km	276.25		82 m
10R	GS	AAR	111.90 MHz	10 nm	100.62	2.75	82 ft
				19 km	96.58		82 m
28L	GS	TR	111.10 MHz	10 nm	280.62	2.75	82 ft
				19 km	276.58		82 m

EKYT

Region: DENMARK / FAROE ISLANDS
Timezone: EUROPE/COPENHAGEN
Runways: 2

Elevation: 9 ft / 3 m
Location: 57.094200 9.855740
Magnetic Var: 3.804 E

METAR

EKYT 070750Z AUTO 21011KT 9999 FEW026/// SCT190/// 14/07 Q1013

TAF

TAF EKYT 070505Z 0706/0806 20008KT 9999 SCT030 TEMPO 0706/0709 FEW020CB TEMPO 0709/0720 SHRA SCT020CB PROB40 TEMP

Frequencies

APP - 123.97 MHz -
TWR - 118.30 MHz -
GND - 131.55 MHz -

APP - 120.70 MHz - ARR
REC - 120.47 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	8,674 ft	83.22	ASPHALT	0 ft	892 ft
	45 m	2,644 m	79.41		0 m	272 m
26R	148 ft	8,674 ft	263.25	ASPHALT	0 ft	728 ft
	45 m	2,644 m	259.45		0 m	222 m
08R	75 ft	8,344 ft	83.22	ASPHALT	0 ft	489 ft
	23 m	2,543 m	79.42		0 m	149 m
26L	75 ft	8,344 ft	263.26	ASPHALT	0 ft	489 ft
	23 m	2,543 m	259.45		0 m	149 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	AE	109.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
26R	DME	YT	109.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
08L	LOC-ILS	AE	109.90 MHz	18 nm	83.27	-	10 ft
				33 km	79.47		10 m
26R	LOC-ILS	YT	109.91 MHz	18 nm	263.19	-	10 ft
				33 km	259.39		10 m
08L	GS	AE	109.90 MHz	10 nm	83.44	2.75	10 ft
				19 km	79.64		10 m
26R	GS	YT	109.90 MHz	10 nm	263.44	2.75	10 ft
				19 km	259.64		10 m