


2024/05/03 0252Z

LCLK NEKES **A28** TELVO LTAC

318.41 nm / 589.70 km

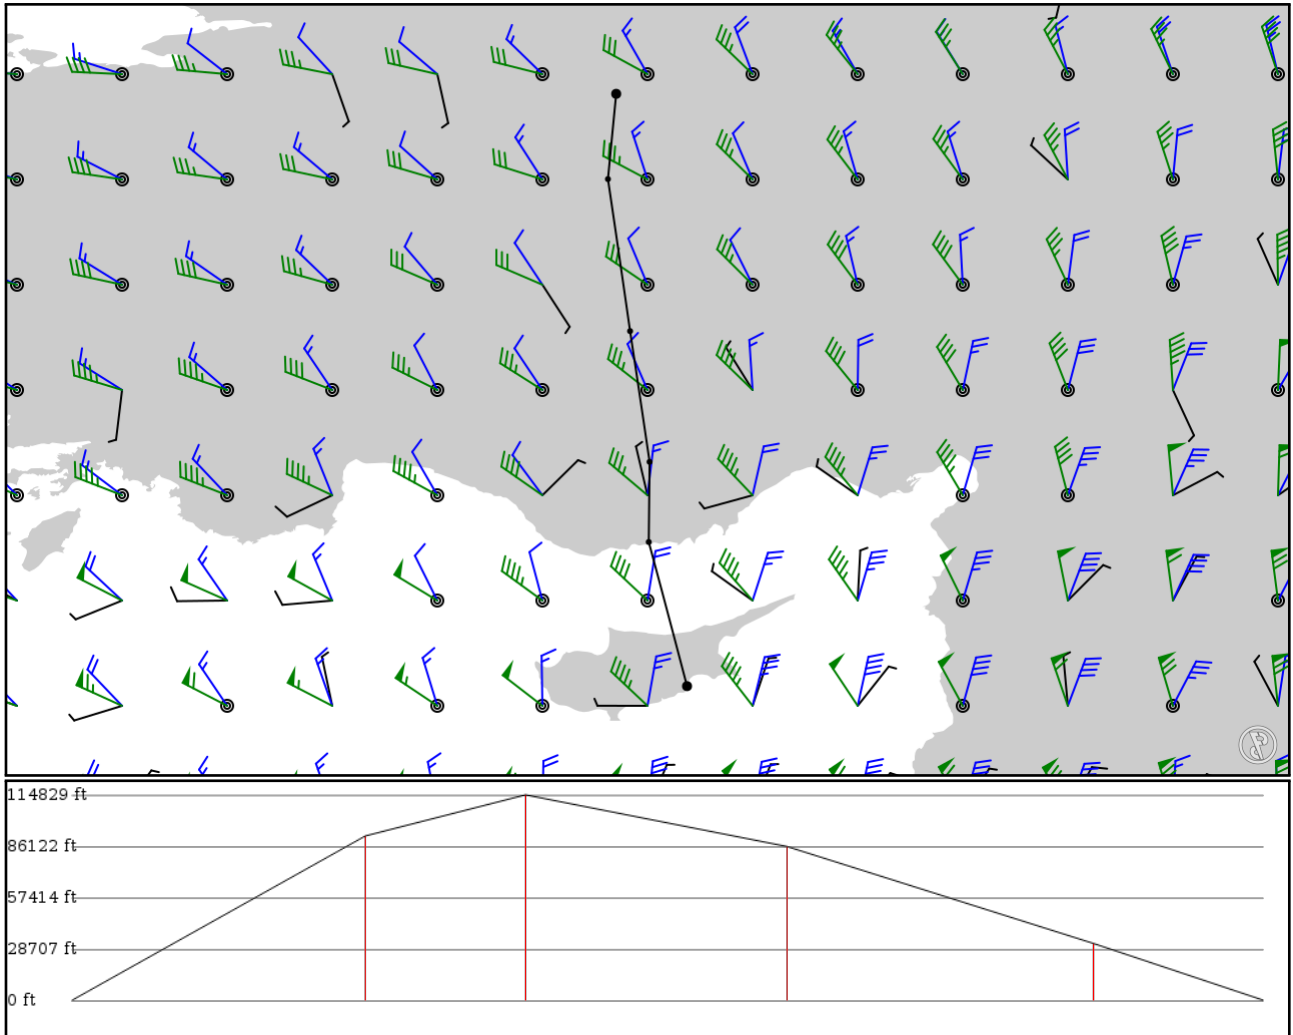

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LCLK	-	34.87512	0 ft	-	Larnaca
APT	-	33.62483	0 m		
NEKES	-	36.15361	28,000 ft	78	-
FIX	-	33.28472	8,534 m		
MUT	A28	36.86417	35,000 ft	42	MUT VOR-DME
VOR	AWY-LO	33.29222	10,668 m		
OBRUK	A28	38.02389	26,200 ft	70	-
FIX	AWY-LO	33.11889	7,986 m		
TELVO	A28	39.37222	9,700 ft	81	-
FIX	AWY-LO	32.92222	2,957 m		
LTAC	-	40.12828	0 ft	45	ESENBOGA
APT	-	32.99540	0 m		

LCLK

Region: CYPRUS
Timezone: ASIA/NICOSIA
Runways: 1

Elevation: 11 ft / 3 m
Location: 34.873800 33.624000
Magnetic Var: 5.544 E

METAR

LCLK 030230Z 32005KT CAVOK 16/15 Q1005 NOSIG

TAF

TAF LCLK 022330Z 0300/0324 25008KT 9999 FEW020 BECMG 0308/0312 23022G32KT

Frequencies

REC - 126.55 MHz - LARNACA ATIS	CLD - 120.57 MHz - LARNACA CLEARANCE DELIVERY
GND - 119.40 MHz - LARNACA GROUND	GND - 121.90 MHz - LARNACA GROUND
TWR - 121.20 MHz - LARNACA TOWER	TWR - 130.20 MHz - LARNACA TOWER
APP - 130.20 MHz - LARNACA APPROACH	APP - 121.20 MHz - LARNACA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	148 ft	9,832 ft	45.08	ASPHALT	0 ft	0 ft
	45 m	2,997 m	39.53		0 m	0 m
22	148 ft	9,832 ft	225.09	ASPHALT	627 ft	0 ft
	45 m	2,997 m	219.55		191 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	DME	ILC	110.30 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
22	LOC-ILS	ILC	110.30 MHz	18 nm	225.09	-	11 ft
				33 km	219.55		11 m
22	GS	ILC	110.30 MHz	10 nm	225.09	2.75	11 ft
				19 km	219.55		11 m

LTAC

Region: TURKEY
Timezone: EUROPE/ISTANBUL
Runways: 2

Elevation: 3,125 ft / 953 m
Location: 40.128100 32.995000
Magnetic Var: 6.318 E

METAR

LTAC 030220Z 26005KT 9999 SCT030 BKN080 11/08 Q1008 NOSIG RMK RWY21L 25007KT RWY03L 26004KT RWY21R 24006KT

TAF

TAF TAF LTAC 022240Z 0300/0324 VRB02KT 9999 SCT035 BKN090 PROB30 0303/0306 4000 BR SCT010 BKN030 BECMG 0306/0308 2

Frequencies

REC - 123.60 MHz - D-ATIS
GND - 121.90 MHz - ESENBOA GROUND

TWR - 118.10 MHz - ESENBOA TOWER
APP - 119.10 MHz - ESENBOA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03L	148 ft	11,128 ft	36.04	CONCRETE	0 ft	0 ft
	45 m	3,392 m	29.72		0 m	0 m
21R	148 ft	11,128 ft	216.06	CONCRETE	0 ft	0 ft
	45 m	3,392 m	209.74		0 m	0 m
03R	197 ft	12,316 ft	36.10	CONCRETE	0 ft	0 ft
	60 m	3,754 m	29.78		0 m	0 m
21L	197 ft	12,316 ft	216.12	CONCRETE	0 ft	0 ft
	60 m	3,754 m	209.80		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03L	LOC-ILS	IAKR	108.90 MHz	18 nm	35.62	-	3,125 ft
				33 km	29.30		3,125 m
03R	LOC-ILS	IANK	110.30 MHz	18 nm	35.48	-	3,125 ft
				33 km	29.16		3,125 m
21L	LOC-ILS	IESB	108.10 MHz	18 nm	216.08	-	3,097 ft
				33 km	209.76		3,097 m
21R	LOC-ILS	IEBG	108.30 MHz	18 nm	217.00	-	3,125 ft
				33 km	210.68		3,125 m
03L	GS	IAKR	108.90 MHz	10 nm	36.40	3.00	3,125 ft
				19 km	30.08		3,125 m
03R	GS	IANK	110.30 MHz	10 nm	35.60	3.00	3,125 ft
				19 km	29.28		3,125 m
21L	GS	IESB	108.10 MHz	10 nm	215.60	3.00	3,125 ft
				19 km	209.28		3,125 m
21R	GS	IEBG	108.30 MHz	10 nm	216.40	3.00	3,125 ft
				19 km	210.08		3,125 m