

# KSFO

San Francisco Intl


# KSEA

Seattle-Tacoma Intl

2024/06/04 0622Z

KSFO NIECE **J501** OED **J1** BTG KSEA

594.71 nm / 1101.41 km

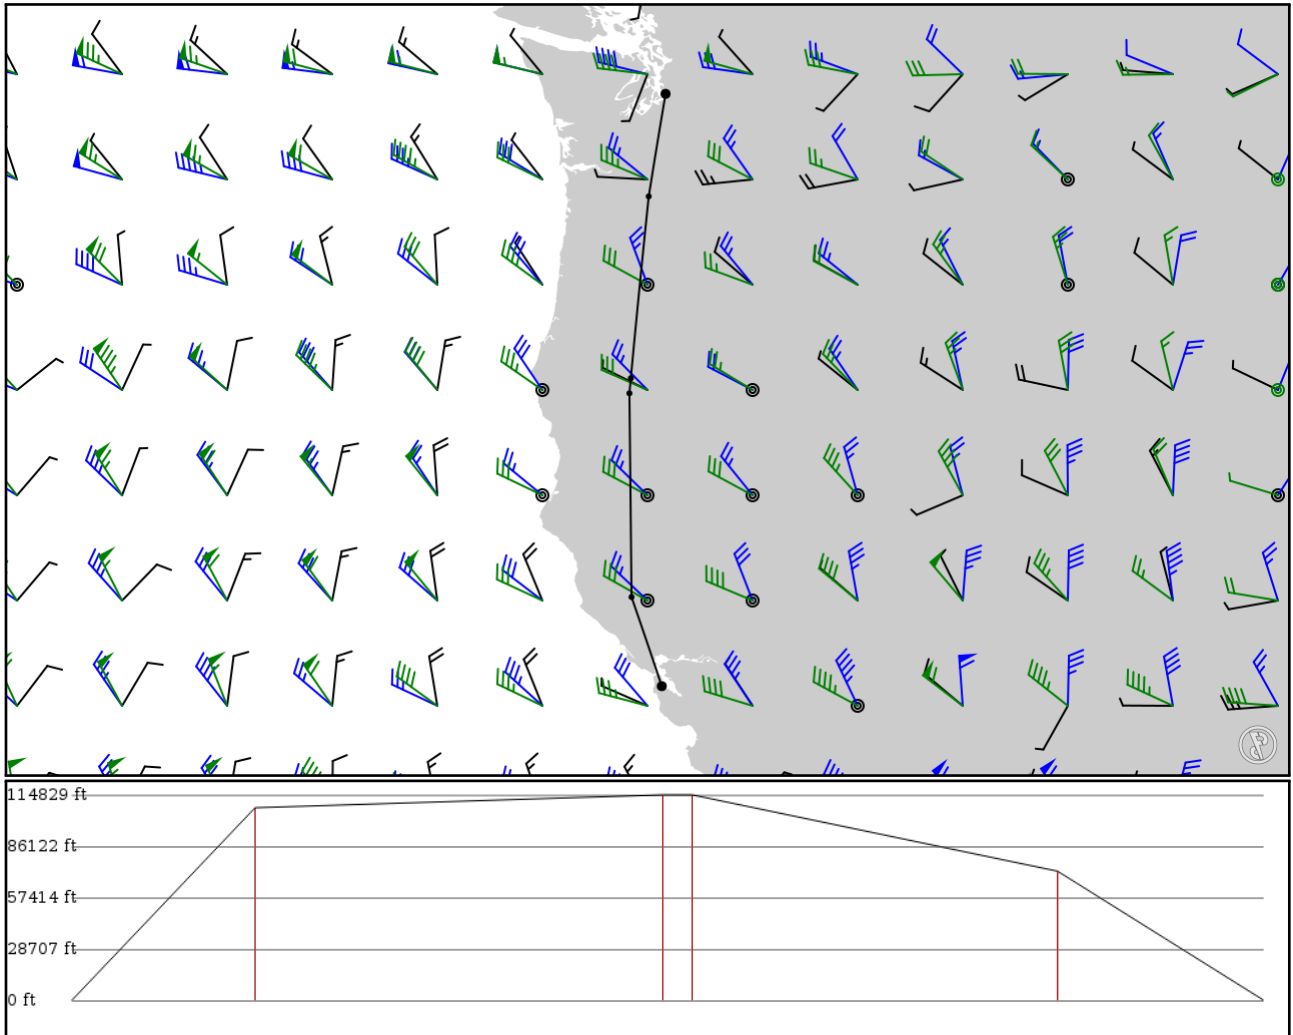

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSFO	-	37.61850	0 ft	-	San Francisco Intl
APT	-	-122.37500	0 m		
NIECE	-	39.09740	32,800 ft	91	-
FIX	-	-122.87800	9,997 m		
OED	J501	42.47960	35,000 ft	203	ROGUE VALLEY (MEDFORD)
VOR	AWY-HI	-122.91300	10,668 m		
DREWS	J1	42.72910	35,000 ft	15	-
FIX	AWY-HI	-122.89000	10,668 m		
BTG	J1	45.74780	22,000 ft	181	BATTLE GROUND
VOR	AWY-HI	-122.59200	6,706 m		
KSEA	-	47.45020	0 ft	102	Seattle-Tacoma Intl
APT	-	-122.31200	0 m		

## KSFO

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 4

Elevation: 13 ft / 4 m  
Location: 37.618500 -122.375000  
Magnetic Var: 12.837 E

## METAR

KSFO 040556Z 27007KT 10SM SCT200 13/08 A2997 RMK A02 SLP149 T01280083 10156 20122 50004

## TAF

TAF KSFO 040540Z 0406/0512 28014KT P6SM SCT250 FM040730 29005KT P6SM SCT250 FM041800 30014KT P6SM SKC FM042100 290

## Frequencies

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.06		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.06		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.08		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.88		0 m	136 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m

## KSEA

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 3

Elevation: 432 ft / 132 m  
Location: 47.450200 -122.312000  
Magnetic Var: 14.765 E

## METAR

KSEA 040601Z 21013G20KT 10SM SCT024 OVC034 11/08 A2994 RMK A02 T01060078

## TAF

KSEA 040537Z 0406/0512 19011G20KT P6SM -SHRA FEW015 BKN025 BKN040 FM040900 18022G32KT P6SM -SHRA OVC020 FM041900

## Frequencies

REC - 118.00 MHz - SEATTLE ATIS  
GND - 121.70 MHz - SEATTLE GROUND  
TWR - 120.95 MHz - SEATTLE TOWER  
DEP - 120.10 MHz - SEATTLE DEPARTURE  
CLD - 128.00 MHz - SEATTLE CLEARANCE  
TWR - 119.90 MHz - SEATTLE TOWER  
APP - 133.65 MHz - SEATTLE APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	11,904 ft	180.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	165.58		0 m	122 m
34R	151 ft	11,904 ft	0.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	345.58		0 m	122 m
16C	151 ft	9,428 ft	180.34	CONCRETE	0 ft	400 ft
	46 m	2,874 m	165.58		0 m	122 m
34C	151 ft	9,428 ft	0.34	CONCRETE	0 ft	397 ft
	46 m	2,874 m	345.58		0 m	121 m
16R	151 ft	8,502 ft	180.34	CONCRETE	0 ft	200 ft
	46 m	2,591 m	165.57		0 m	61 m
34L	151 ft	8,502 ft	0.34	CONCRETE	0 ft	197 ft
	46 m	2,591 m	345.57		0 m	60 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	ISZI	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
16L	DME	ISNQ	110.30 MHz	18 nm	-	-	369 ft
				33 km	-		369 m
16R	DME	ICJL	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34C	DME	ITUC	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
34L	DME	IB EJ	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34R	DME	ISEA	110.30 MHz	18 nm	-	-	469 ft
				33 km	-		469 m
16C	LOC-ILS	ISZI	111.70 MHz	18 nm	180.34	-	355 ft
				33 km	165.57		355 m
16L	LOC-ILS	ISNQ	110.30 MHz	18 nm	180.34	-	338 ft
				33 km	165.58		338 m
16R	LOC-ILS	ICJL	110.75 MHz	18 nm	180.34	-	410 ft
				33 km	165.57		410 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34C	LOC-ILS	ITUC	111.70 MHz	18 nm	0.34	-	422 ft
				33 km	345.57		422 m
34L	LOC-ILS	IBEJ	110.75 MHz	18 nm	0.34	-	433 ft
				33 km	345.57		433 m
34R	LOC-ILS	ISEA	110.30 MHz	18 nm	0.34	-	428 ft
				33 km	345.58		428 m
16C	GS	ISZI	111.70 MHz	10 nm	180.67	3.00	418 ft
				19 km	165.91		418 m
16L	GS	ISNQ	110.30 MHz	10 nm	180.69	3.00	425 ft
				19 km	165.92		425 m
16R	GS	ICJL	110.75 MHz	10 nm	180.67	3.00	410 ft
				19 km	165.91		410 m
34C	GS	ITUC	111.70 MHz	10 nm	0.67	3.00	367 ft
				19 km	345.91		367 m
34L	GS	IBEJ	110.75 MHz	10 nm	0.67	3.00	360 ft
				19 km	345.91		360 m
34R	GS	ISEA	110.30 MHz	10 nm	0.69	2.75	355 ft
				19 km	345.92		355 m