

NLWW

Wallis Hihifo Airport


PHNL

Honolulu Intl

2024/05/22 0357Z

NLWW BAXIL **B581** WOBY DUNEY **G347** DATBE 1900N-15900W OPIHI PHNL

2532.33 nm / 4689.88 km

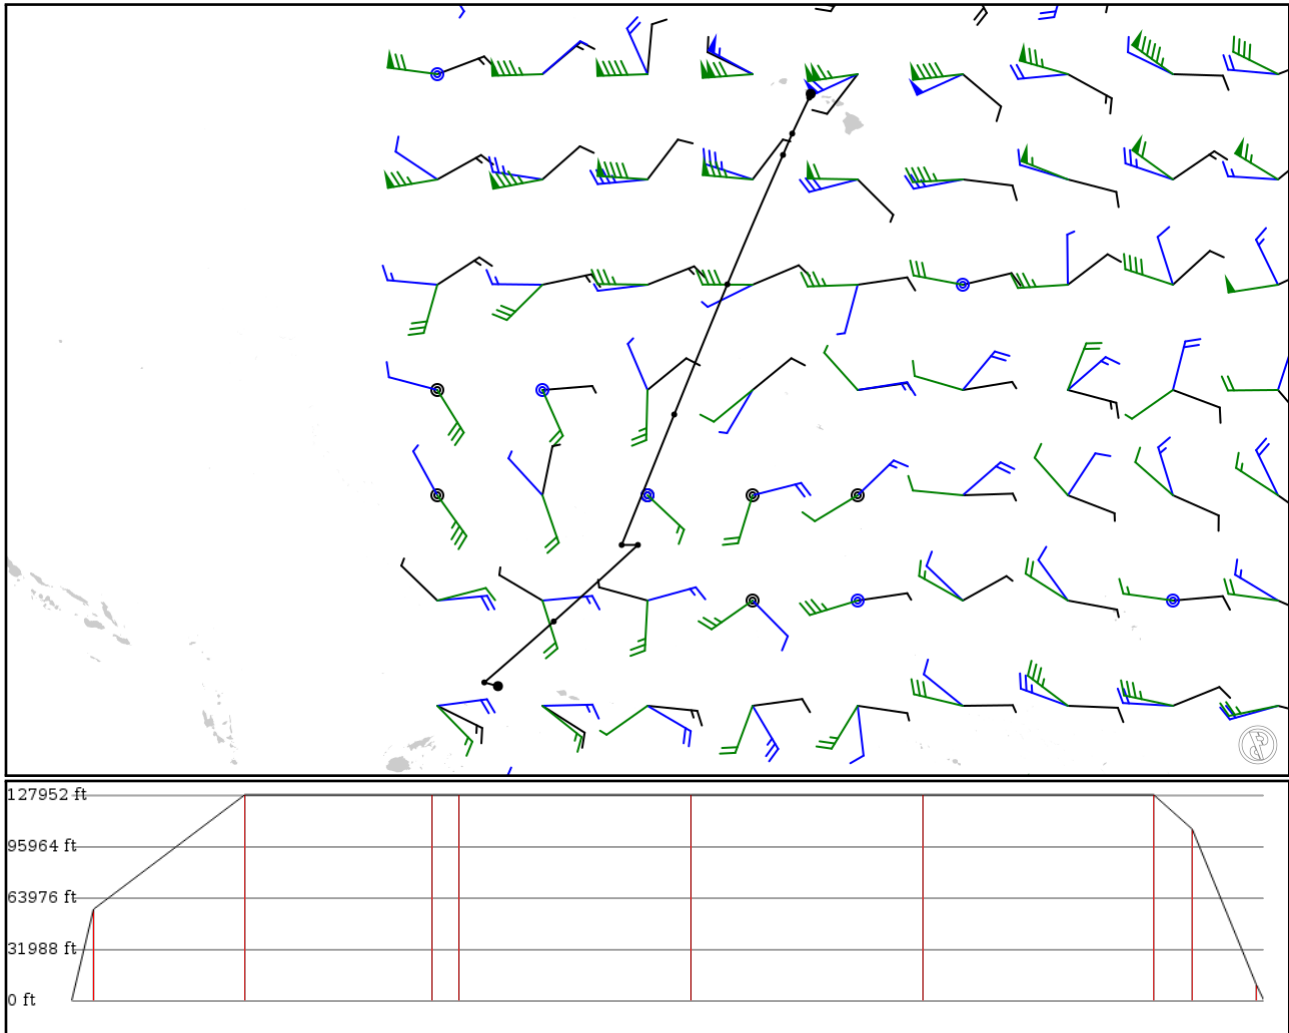

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 39000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
NLWW APT	-	-13.23830 -176.19900	0 ft 0 m	-	Wallis Hihifo Airport
BAXIL FIX	-	-13.02100 -176.99800	17,300 ft 5,273 m	48	-
GOBIN FIX	B581 AWY-HI	-9.46436 -172.93800	39,000 ft 11,887 m	320	-
WOOPY FIX	B581 AWY-HI	-5.00000 -168.02000	39,000 ft 11,887 m	397	-
DUNEY FIX	-	-5.00000 -168.96800	39,000 ft 11,887 m	56	-
DULCE FIX	G347 AWY-HI	2.61083 -165.89700	39,000 ft 11,887 m	492	-
DASNE FIX	G347 AWY-HI	10.20470 -162.79100	39,000 ft 11,887 m	492	-
DATBE FIX	G347 AWY-HI	17.75580 -159.53900	39,000 ft 11,887 m	491	-
1900N-15900W LATLON	-	19.00000 -159.00000	32,500 ft 9,906 m	80	-
OPIHI FIX	-	21.09580 -158.00400	3,000 ft 914 m	137	-
PHNL APT	-	21.31940 -157.92100	0 ft 0 m	14	Honolulu Intl

PHNL

Region: USA (HAWAII)
Timezone: PACIFIC/HONOLULU
Runways: 4

Elevation: 13 ft / 4 m
Location: 21.319400 -157.921000
Magnetic Var: 9.258 E

METAR

PHNL 220253Z 08013KT 10SM FEW025 FEW040 28/19 A2998

TAF

TAF AMD PHNL 220250Z 2203/2306 08011G19KT P6SM FEW025 SCT045 FM220500 05006KT P6SM FEW020 SCT040 FM222100 07012G20

Frequencies

REC - 127.90 MHz - ATIS	TWR - 118.10 MHz - HONOLULU TOWER
TWR - 123.90 MHz - HONOLULU TOWER	GND - 121.90 MHz - HONOLULU GROUND
CLD - 121.40 MHz - CLEARANCE DELIVERY	APP - 118.30 MHz - HCF APPROACH
DEP - 124.80 MHz - HCF DEPARTURE	DEP - 124.80 MHz - HCF DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	6,961 ft	52.84	ASPHALT	0 ft	0 ft
	46 m	2,122 m	43.58		0 m	0 m
22R	150 ft	6,961 ft	232.85	ASPHALT	0 ft	0 ft
	46 m	2,122 m	223.59		0 m	0 m
04R	150 ft	9,010 ft	52.85	ASPHALT	0 ft	194 ft
	46 m	2,746 m	43.59		0 m	59 m
22L	150 ft	9,010 ft	232.86	ASPHALT	0 ft	197 ft
	46 m	2,746 m	223.60		0 m	60 m
08R	200 ft	11,987 ft	90.01	ASPHALT	0 ft	558 ft
	61 m	3,654 m	80.75		0 m	170 m
26L	200 ft	11,987 ft	270.02	ASPHALT	0 ft	554 ft
	61 m	3,654 m	260.76		0 m	169 m
08L	150 ft	12,297 ft	90.00	ASPHALT	0 ft	469 ft
	46 m	3,748 m	80.74		0 m	143 m
26R	150 ft	12,297 ft	270.01	ASPHALT	0 ft	696 ft
	46 m	3,748 m	260.75		0 m	212 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IIUM	110.50 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
26L	DME	IEPC	109.10 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
26L	LOC-LOC	IEPC	109.10 MHz	18 nm	304.00	-	13 ft
				33 km	294.74		13 m
04R	GS	IIUM	110.50 MHz	10 nm	52.85	3.00	13 ft
				19 km	43.59		13 m
08L	GS	IHNL	111.70 MHz	10 nm	90.01	3.01	13 ft
				19 km	80.75		13 m