

ZHCC

Zhengzhou Xinzheng Intl


ZBAA

Beijing-Capital

2024/06/06 1321Z

ZHCC UPDIV **V54** WXI **A461** HG **W59** AVNIX ZBAA

359.99 nm / 666.71 km

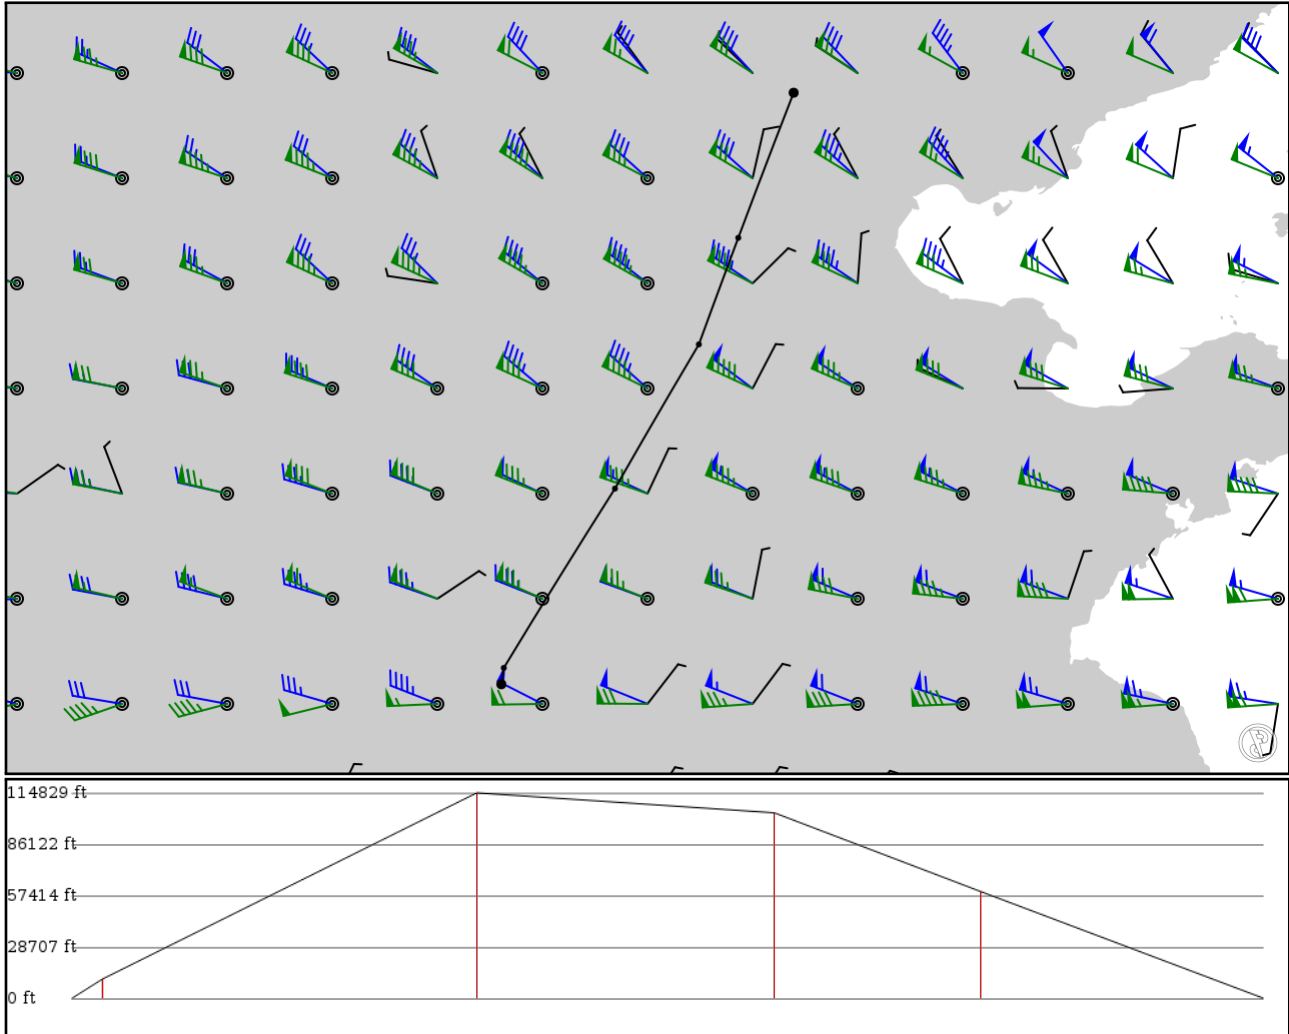

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ZHCC APT	-	34.52640 113.85000	0 ft 0 m	-	Zhengzhou Xinzheng Intl
UPDIV FIX	-	34.68000 113.87300	3,300 ft 1,006 m	9	-
WXI VOR	V54 AWY-HI	36.36330 114.91700	35,000 ft 10,668 m	113	WEIXIAN
HG NDB	A461 AWY-HI	37.71670 115.70500	31,600 ft 9,632 m	89	HENGSHUI
AVNIX FIX	W59 AWY-HI	38.71670 116.07500	18,200 ft 5,547 m	62	-
ZBAA APT	-	40.07870 116.59500	0 ft 0 m	85	Beijing-Capital

ZHCC

Region: CHINA
Timezone: ASIA/SHANGHAI
Runways: 2

Elevation: 495 ft / 151 m
Location: 34.526400 113.850000
Magnetic Var: 5.376 W

METAR

ZHCC 061300Z 12002MPS CAVOK 26/13 Q1012 NOSIG

TAF

TAF ZHCC 060906Z 0612/0712 17004G09MPS 5000 HZ NSC TX34/0707Z TN22/0622Z

Frequencies

REC - 128.45 MHz - ZHENGZHOU ATIS	CLD - 121.80 MHz - ZHENGZHOU DLV
GND - 121.90 MHz - ZHENGZHOU GND	GND - 121.60 MHz - ZHENGZHOU GND
GND - 121.97 MHz - ZHENGZHOU APRON	GND - 121.70 MHz - ZHENGZHOU APRON
TWR - 118.07 MHz - ZHENGZHOU TWR	TWR - 118.30 MHz - ZHENGZHOU TWR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12L	197 ft	11,823 ft	112.44	CONCRETE	0 ft	384 ft
	60 m	3,604 m	117.81		0 m	117 m
30R	197 ft	11,823 ft	292.46	CONCRETE	0 ft	374 ft
	60 m	3,604 m	297.83		0 m	114 m
12R	148 ft	11,166 ft	112.42	CONCRETE	0 ft	180 ft
	45 m	3,403 m	117.79		0 m	55 m
30L	148 ft	11,166 ft	292.43	CONCRETE	0 ft	180 ft
	45 m	3,403 m	297.81		0 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12R	DME	IFF	110.30 MHz	18 nm	-	-	489 ft
				33 km	-		489 m
30L	DME	IAA	109.30 MHz	18 nm	-	-	485 ft
				33 km	-		485 m
12L	LOC-ILS	IXL	108.50 MHz	18 nm	112.45	-	495 ft
				33 km	117.83		495 m
12R	LOC-ILS	IFF	110.30 MHz	18 nm	112.43	-	495 ft
				33 km	117.81		495 m
30L	LOC-ILS	IAA	109.30 MHz	18 nm	292.43	-	495 ft
				33 km	297.81		495 m
30R	LOC-ILS	IZR	110.70 MHz	18 nm	292.45	-	495 ft
				33 km	297.83		495 m
12L	GS	IXL	108.50 MHz	10 nm	112.45	3.00	495 ft
				19 km	117.83		495 m
12R	GS	IFF	110.30 MHz	10 nm	112.43	3.00	495 ft
				19 km	117.81		495 m
30L	GS	IAA	109.30 MHz	10 nm	292.43	3.00	495 ft
				19 km	297.81		495 m
30R	GS	IZR	110.70 MHz	10 nm	292.45	3.00	495 ft
				19 km	297.83		495 m

ZBAA

Region: CHINA
Timezone: ASIA/SHANGHAI
Runways: 3

Elevation: 115 ft / 35 m
Location: 40.078700 116.595000
Magnetic Var: 7.357 W

METAR

ZBAA 061300Z 14002MPS CAVOK 24/16 Q1010 NOSIG

TAF

TAF TAF ZBAA 060302Z 0606/0706 19004MPS 6000 NSC TX32/0607Z TN19/0621Z TEMPO 0609/0612 -TSRA FEW030CB BKN040 TEMP

Frequencies

REC - 127.60 MHz - ATIS	REC - 128.65 MHz - ATIS
CLD - 121.60 MHz - BEIJING DELIVERY	CLD - 121.65 MHz - BEIJING DELIVERY
GND - 121.90 MHz - BEIJING GROUND	GND - 121.80 MHz - BEIJING GROUND
GND - 121.70 MHz - BEIJING GROUND	GND - 121.75 MHz - BEIJING GROUND
GND - 121.85 MHz - BEIJING GROUND	GND - 122.22 MHz - BEIJING APRON
GND - 122.65 MHz - BEIJING APRON	TWR - 124.30 MHz - BEIJING TOWER
TWR - 118.50 MHz - BEIJING TOWER	TWR - 118.60 MHz - BEIJING TOWER
APP - 126.10 MHz - BEIJING APPROACH	APP - 119.00 MHz - BEIJING APPROACH
APP - 126.50 MHz - BEIJING APPROACH	APP - 121.10 MHz - BEIJING APPROACH
APP - 119.70 MHz - BEIJING APPROACH	APP - 124.70 MHz - BEIJING APPROACH
APP - 127.75 MHz - BEIJING APPROACH	APP - 120.60 MHz - BEIJING APPROACH
APP - 125.50 MHz - BEIJING APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01	195 ft	12,481 ft	353.17	CONCRETE	0 ft	394 ft
	59 m	3,804 m	0.53		0 m	120 m
19	195 ft	12,481 ft	173.17	CONCRETE	0 ft	397 ft
	59 m	3,804 m	180.53		0 m	121 m
18L	197 ft	12,493 ft	173.17	ASPHALT	0 ft	190 ft
	60 m	3,808 m	180.53		0 m	58 m
36R	197 ft	12,493 ft	353.17	ASPHALT	0 ft	190 ft
	60 m	3,808 m	0.53		0 m	58 m
18R	164 ft	10,512 ft	173.15	ASPHALT	0 ft	200 ft
	50 m	3,204 m	180.51		0 m	61 m
36L	164 ft	10,512 ft	353.15	ASPHALT	0 ft	200 ft
	50 m	3,204 m	0.51		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	DME	ILG	110.30 MHz	18 nm	-	-	135 ft
				33 km	-		135 m
01	LOC-ILS	INJ	108.50 MHz	18 nm	353.17	-	116 ft
				33 km	0.53		116 m
18L	LOC-ILS	IOR	109.30 MHz	18 nm	173.17	-	116 ft
				33 km	180.53		116 m
18R	LOC-ILS	ILG	110.30 MHz	18 nm	173.15	-	116 ft
				33 km	180.51		116 m
19	LOC-ILS	ISZ	108.90 MHz	18 nm	173.17	-	116 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	180.53		116 m
36L	LOC-ILS	IDK	111.70 MHz	18 nm	353.15	-	116 ft
				33 km	0.51		116 m
36R	LOC-ILS	IQU	109.90 MHz	18 nm	353.10	-	116 ft
				33 km	0.46		116 m
01	GS	INJ	108.50 MHz	10 nm	353.17	3.00	116 ft
				19 km	0.53		116 m
18L	GS	IOR	109.30 MHz	10 nm	173.17	3.00	116 ft
				19 km	180.53		116 m
18R	GS	ILG	110.30 MHz	10 nm	173.15	3.00	116 ft
				19 km	180.51		116 m
19	GS	ISZ	108.90 MHz	10 nm	173.17	3.20	116 ft
				19 km	180.53		116 m
36L	GS	IDK	111.70 MHz	10 nm	353.15	3.00	116 ft
				19 km	0.51		116 m
36R	GS	IQU	109.90 MHz	10 nm	353.17	3.00	116 ft
				19 km	0.53		116 m