


2024/05/15 0555Z

KSWW DUMPS J17 PUB V244 FSHR J28 HBU J240 MTU KSLC

797.93 nm / 1477.77 km

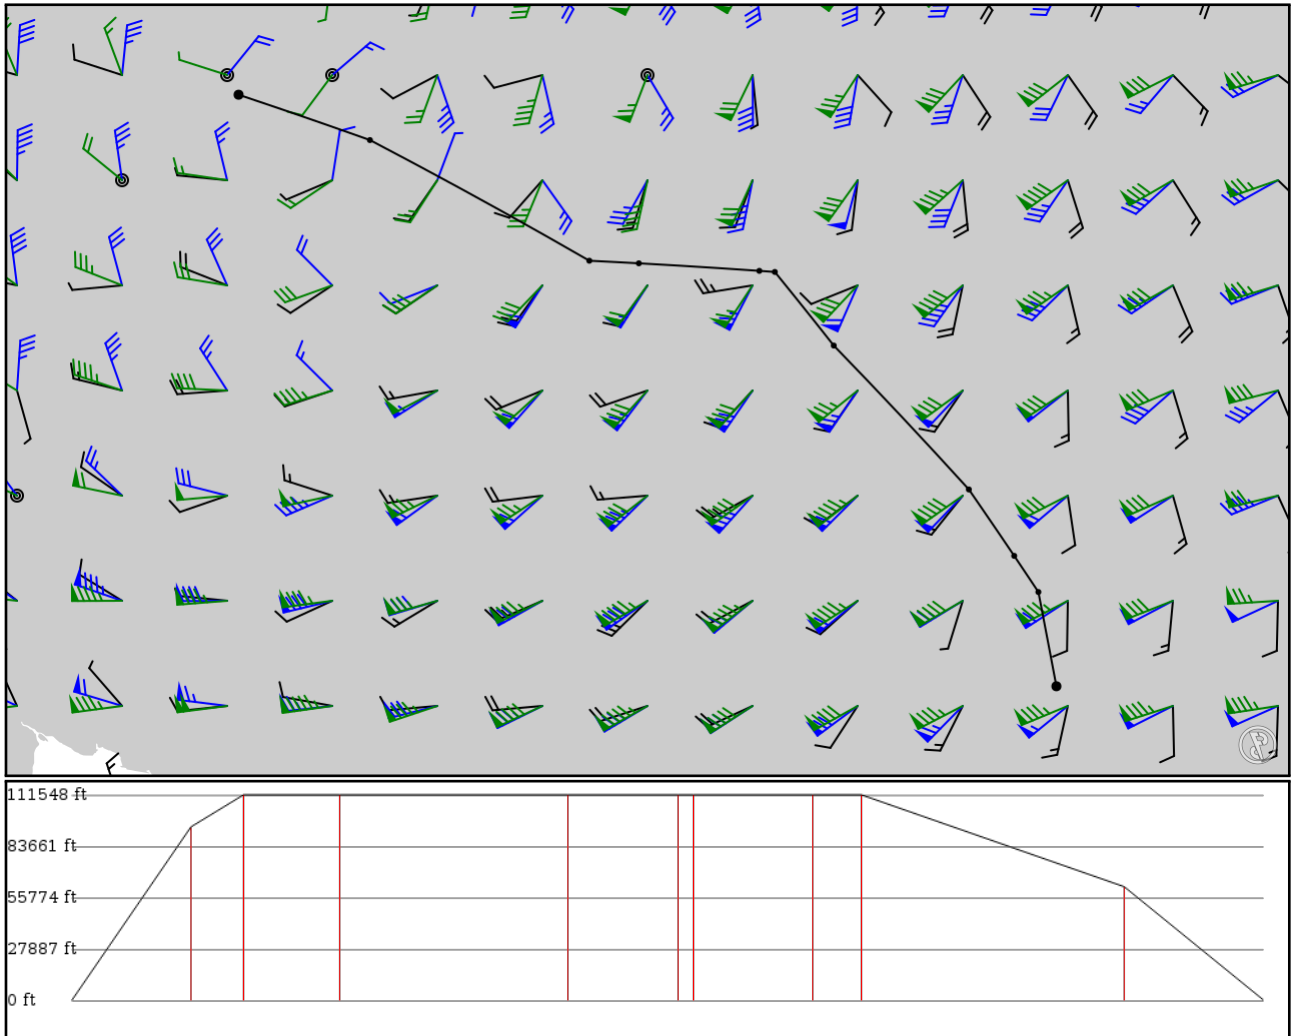

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSWW	-	32.46666	0 ft	-	AVENGER FLD
APT	-	-100.46700	0 m		
DUMPS	-	33.79249	28,700 ft	80	-
FIX	-	-100.72046	8,748 m		
TURKI	J17	34.30093	34,000 ft	34	-
FIX	AWY-HI	-101.06084	10,363 m		
PNH	J17	35.23506	34,000 ft	64	PANHANDLE VORTAC
VOR	AWY-HI	-101.69903	10,363 m		
TBE	J17	37.25867	34,000 ft	152	TOBE VOR-DME
VOR	AWY-HI	-103.60006	10,363 m		
PUB	J17	38.29425	34,000 ft	73	PUEBLO VORTAC
VOR	AWY-HI	-104.42944	10,363 m		
FSHER	V244	38.30969	34,000 ft	10	-
FIX	AWY-LO	-104.64754	10,363 m		
ELWAY	J28	38.41573	34,000 ft	80	-
FIX	AWY-HI	-106.34307	10,363 m		
HBU	J28	38.45215	34,000 ft	32	BLUE MESA VOR-DME
DME	AWY-HI	-107.03979	10,363 m		
MTU	J240	40.14908	18,800 ft	175	MYTON VOR-DME
VOR	AWY-HI	-110.12703	5,730 m		
KSLC	-	40.78697	0 ft	92	Salt Lake City Intl
APT	-	-111.97543	0 m		

KSLC

Region: UNITED STATES

Timezone: AMERICA/DENVER

Runways: 4

Elevation: 4,227 ft / 1,288 m

Location: 40.787000 -111.975000

Magnetic Var: 10.770 E

METAR

KSLC 150454Z 00000KT 10SM FEW220 16/06 A2997 RMK AO2 SLP107 T01560056

TAF

KSLC 150251Z 1503/1606 34007KT P6SM SKC FM150500 15005KT P6SM FEW250 FM151600 31005KT P6SM FEW100 FEW250 FM151900

Frequencies

REC - 124.75 MHz - ATIS

COM - 122.95 MHz - UNICOM

GND - 121.90 MHz -

TWR - 118.30 MHz -

TWR - 132.65 MHz -

APP - 124.30 MHz - APP/DEP

APP - 126.25 MHz - APP/DEP

REC - 127.62 MHz - ATIS

CLD - 127.30 MHz - CLNC DEL

GND - 133.65 MHz -

TWR - 119.05 MHz -

APP - 121.10 MHz - APP/DEP

APP - 124.90 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	12,013 ft	174.97	ASPHALT	0 ft	394 ft
	46 m	3,662 m	164.21		0 m	120 m
34R	151 ft	12,013 ft	354.98	ASPHALT	0 ft	400 ft
	46 m	3,662 m	344.21		0 m	122 m
16R	151 ft	12,013 ft	174.97	CONCRETE	0 ft	400 ft
	46 m	3,662 m	164.20		0 m	122 m
34L	151 ft	12,013 ft	354.97	CONCRETE	0 ft	400 ft
	46 m	3,662 m	344.20		0 m	122 m
17	151 ft	9,606 ft	179.99	ASPHALT	0 ft	102 ft
	46 m	2,928 m	169.22		0 m	31 m
35	151 ft	9,606 ft	359.99	ASPHALT	335 ft	312 ft
	46 m	2,928 m	349.22		102 m	95 m
14	151 ft	4,896 ft	153.08	ASPHALT	0 ft	0 ft
	46 m	1,492 m	142.31		0 m	0 m
32	151 ft	4,896 ft	333.09	ASPHALT	0 ft	0 ft
	46 m	1,492 m	322.32		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	DME	IMOY	109.50 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
16R	DME	IUAT	111.90 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
17	DME	IBNT	111.50 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
34L	DME	IUUH	111.90 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
34R	DME	ISLC	109.50 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	LOC-ILS	IMOY	109.50 MHz	18 nm 33 km	174.98 164.21	-	4,227 ft 4,227 m
16R	LOC-ILS	IUAT	111.90 MHz	18 nm 33 km	174.97 164.20	-	4,227 ft 4,227 m
17	LOC-ILS	IBNT	111.50 MHz	18 nm 33 km	179.99 169.22	-	4,227 ft 4,227 m
34L	LOC-ILS	IUUH	111.90 MHz	18 nm 33 km	354.97 344.20	-	4,227 ft 4,227 m
34R	LOC-ILS	ISLC	109.50 MHz	18 nm 33 km	354.98 344.21	-	4,227 ft 4,227 m
35	LOC-ILS	IUTJ	111.50 MHz	18 nm 33 km	359.99 349.22	-	4,227 ft 4,227 m
16L	GS	IMOY	109.50 MHz	10 nm 19 km	174.98 164.21	3.00	4,227 ft 4,227 m
16R	GS	IUAT	111.90 MHz	10 nm 19 km	174.97 164.20	3.00	4,227 ft 4,227 m
17	GS	IBNT	111.50 MHz	10 nm 19 km	179.99 169.22	3.00	4,227 ft 4,227 m
34L	GS	IUUH	111.90 MHz	10 nm 19 km	354.97 344.20	3.00	4,227 ft 4,227 m
34R	GS	ISLC	109.50 MHz	10 nm 19 km	354.98 344.21	3.00	4,227 ft 4,227 m
35	GS	IUTJ	111.50 MHz	10 nm 19 km	359.99 349.22	3.00	4,227 ft 4,227 m