

LIRQ

Firenze-Peretola "Amerigo Vespucci"


LIPZ

Venezia-Tessera "Marco Polo"

2024/04/28 0143Z

LIRQ PETAS LIPZ

112.92 nm / 209.13 km

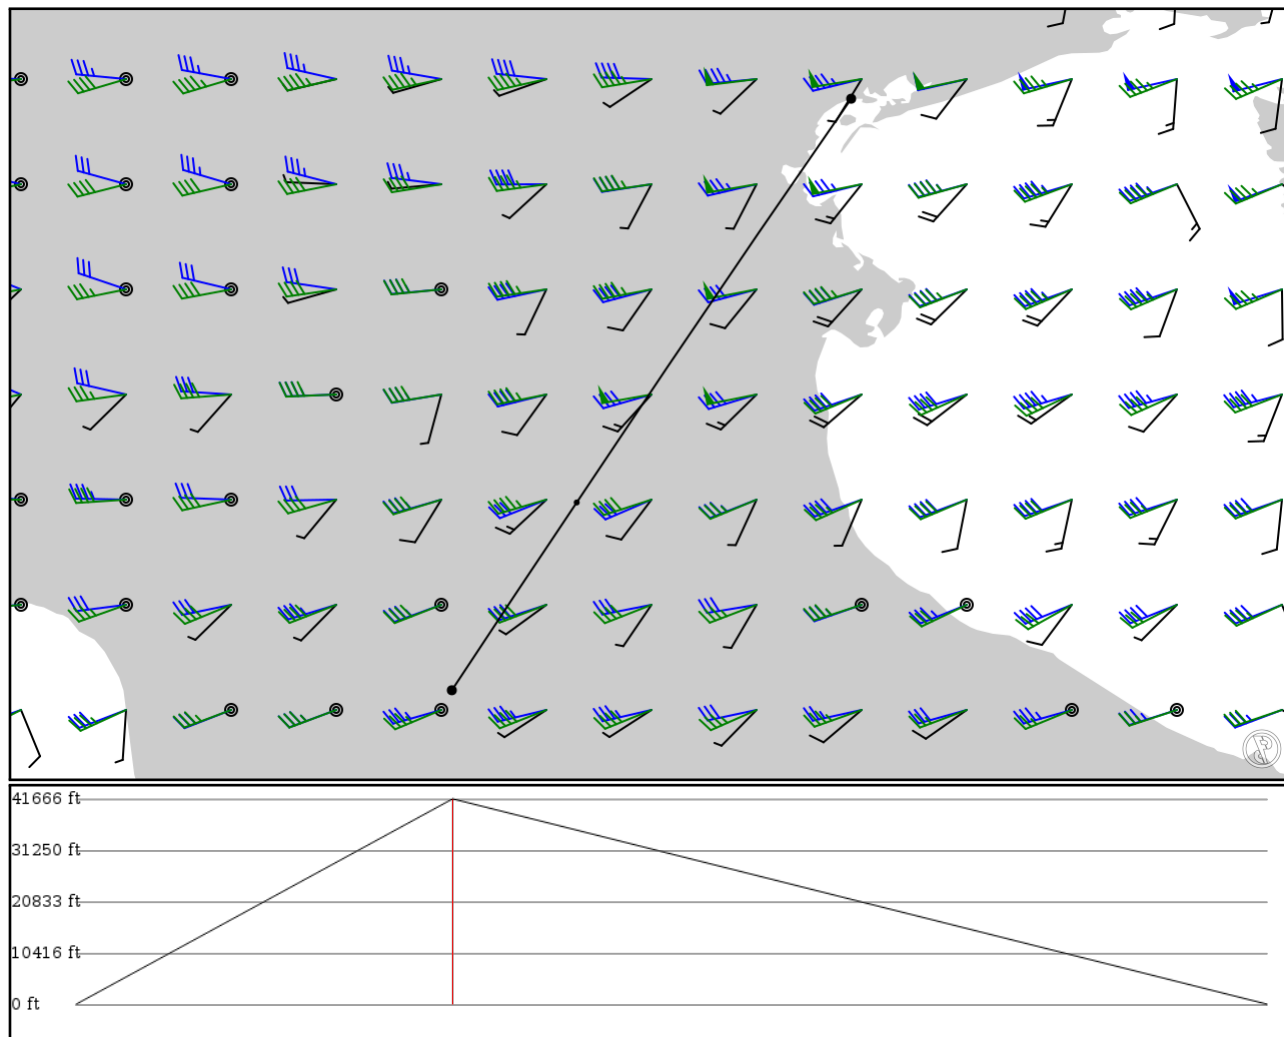

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
LIRQ	-	43.81000	0 ft	-	Firenze-Peretola	"Amerigo Vespucci"
APT	-	11.20510	0 m			
PETAS	-	44.34810	12,700 ft	35	-	
FIX	-	11.56310	3,871 m			
LIPZ	-	45.50480	0 ft	77	Venezia-Tessera	"Marco Polo"
APT	-	12.34970	0 m			

LIRQ

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 142 ft / 43 m
Location: 43.810000 11.205100
Magnetic Var: 3.574 E

METAR

LIRQ 280120Z VRB01KT CAVOK 09/09 Q1017

TAF

TAF LIRQ 272300Z 2800/2824 VRB05KT CAVOK

Frequencies

REC - 129.35 MHz - ATIS
TWR - 122.10 MHz - FIRENZE TOWER
TWR - 118.30 MHz - FIRENZE TOWER
APP - 125.82 MHz - FIRENZE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	98 ft	5,123 ft	48.10	ASPHALT	338 ft	0 ft
	30 m	1,561 m	44.53		103 m	0 m
23	98 ft	5,123 ft	228.11	ASPHALT	1,903 ft	0 ft
	30 m	1,561 m	224.54		580 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	DME	IFZ	110.30 MHz	18 nm	-	-	144 ft
				33 km	-		144 m
05	LOC-ILS	IFZ	110.30 MHz	18 nm	48.10	-	131 ft
				33 km	44.53		131 m
05	GS	IFZ	110.30 MHz	10 nm	47.00	3.00	144 ft
				19 km	43.43		144 m

LIPZ

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 4 ft / 1 m
Location: 45.504800 12.349700
Magnetic Var: 3.901 E

METAR

LIPZ 280120Z 05006KT CAVOK 11/10 Q1018 NOSIG

TAF

TAF LIPZ 272300Z 2800/2906 05007KT 9999 SCT050 BECMG 2810/2812 14010KT BECMG 2816/2818 VRB05KT

Frequencies

REC - 128.65 MHz - ATIS
TWR - 120.20 MHz - VENEZIA TOWER
APP - 118.25 MHz - VENEZIA APPROACH
GND - 121.70 MHz - VENEZIA GROUND
APP - 118.90 MHz - VENEZIA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	148 ft	10,836 ft	42.03	ASPHALT	0 ft	0 ft
	45 m	3,303 m	38.13		0 m	0 m
22L	148 ft	10,836 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	3,303 m	218.15		0 m	0 m
04L	148 ft	9,129 ft	42.03	ASPHALT	318 ft	0 ft
	45 m	2,782 m	38.13		97 m	0 m
22R	148 ft	9,129 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	2,782 m	218.15		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	VTS	109.95 MHz	18 nm	-	-	26 ft
				33 km	-		26 m
04R	LOC-ILS	VTS	109.95 MHz	18 nm	42.04	-	4 ft
				33 km	38.14		4 m
04R	GS	VTS	109.95 MHz	10 nm	42.04	3.00	4 ft
				19 km	38.14		4 m