

EDVE

Braunschweig-Wolfsburg


EDDV

Hannover

2024/05/23 1352Z

EDVE TOMKI EDDV

32.96 nm / 61.04 km

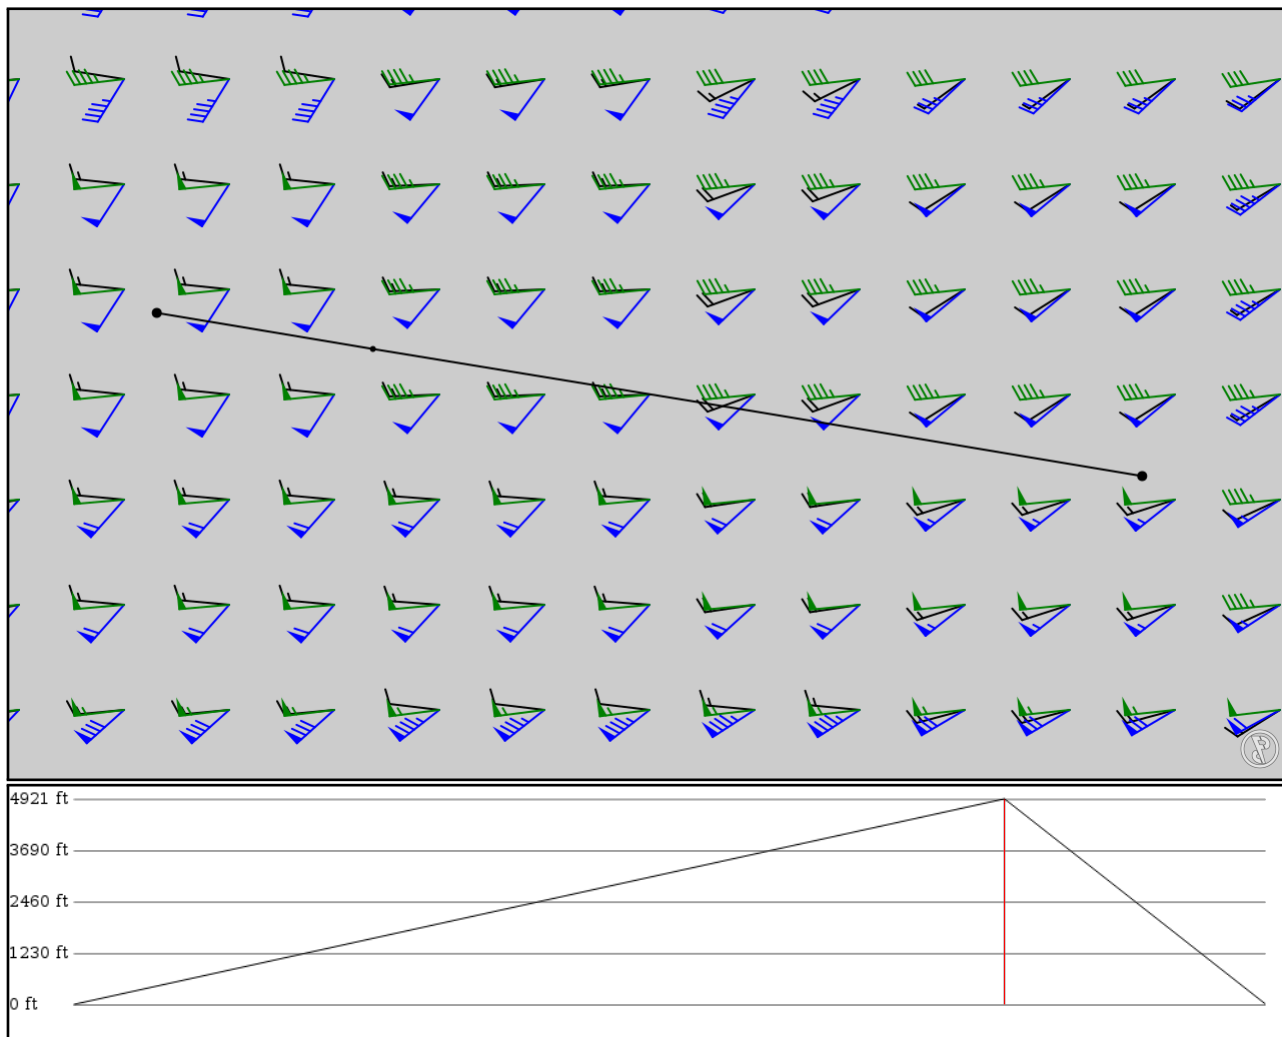

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EDVE	-	52.31844	0 ft	-	Braunschweig-Wolfsburg
APT	-	10.55474	0 m		
TOMKI	-	52.43033	1,500 ft	25	-
FIX	-	9.87717	457 m		
EDDV	-	52.46209	0 ft	7	Hannover
APT	-	9.68679	0 m		

EDVE

Region: GERMANY - CIVIL
Timezone: EUROPE/BERLIN
Runways: 2

Elevation: 293 ft / 89 m
Location: 52.320300 10.554900
Magnetic Var: 3.814 E

METAR

EDVE 231320Z 27008KT 210V310 9999 SCT045 21/11 Q1014

TAF

UNKNOWN

Frequencies

TWR - 119.82 MHz - BREMEN INFO

TWR - 120.05 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08R	532 ft	3,150 ft	85.43	GRASS	0 ft	0 ft
	162 m	960 m	81.62		0 m	0 m
26L	532 ft	3,150 ft	265.44	GRASS	0 ft	0 ft
	162 m	960 m	261.63		0 m	0 m
08	98 ft	7,553 ft	84.72	CONCRETE	988 ft	0 ft
	30 m	2,302 m	80.91		301 m	0 m
26	98 ft	7,553 ft	264.75	CONCRETE	791 ft	0 ft
	30 m	2,302 m	260.93		241 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26	LOC-ILS	BWG	108.50 MHz	18 nm	264.73	-	293 ft
				33 km	260.92		293 m
26	GS	BWG	108.50 MHz	10 nm	264.73	3.50	293 ft
				19 km	260.92		293 m

EDDV

Region: GERMANY - CIVIL
Timezone: EUROPE/BERLIN
Runways: 3

Elevation: 183 ft / 56 m
Location: 52.460200 9.683520
Magnetic Var: 3.563 E

METAR

EDDV 231320Z AUTO 26009KT 230V300 9999 FEW048 21/11 Q1014 NOSIG

TAF

TAF EDDV 230500Z 2306/2406 27008KT 9999 FEW045 BECMG 2315/2317 VRB02KT

Frequencies

REC - 136.57 MHz - HANNOVER ATIS
APP - 118.05 MHz - BREMEN RADAR
TWR - 120.17 MHz - HANNOVER TOWER
APP - 131.32 MHz - BREMEN RADAR
DEP - 119.60 MHz - HANNOVER DIRECTOR
GND - 121.95 MHz - HANNOVER GROUND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09C	75 ft	2,557 ft	92.64	ASPHALT	197 ft	0 ft
	23 m	779 m	89.07		60 m	0 m
27C	75 ft	2,557 ft	272.65	ASPHALT	558 ft	0 ft
	23 m	779 m	269.08		170 m	0 m
09R	148 ft	7,669 ft	92.60	CONCRETE	0 ft	0 ft
	45 m	2,338 m	89.04		0 m	0 m
27L	148 ft	7,669 ft	272.63	CONCRETE	0 ft	0 ft
	45 m	2,338 m	269.07		0 m	0 m
09L	148 ft	10,509 ft	92.57	CONCRETE	0 ft	0 ft
	45 m	3,203 m	89.01		0 m	0 m
27R	148 ft	10,509 ft	272.61	CONCRETE	0 ft	0 ft
	45 m	3,203 m	269.05		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	LOC-ILS	IHNE	108.30 MHz	18 nm	92.59	-	187 ft
				33 km	89.03		187 m
09R	LOC-ILS	IHSE	108.70 MHz	18 nm	92.62	-	183 ft
				33 km	89.06		183 m
27L	LOC-ILS	IHSW	109.50 MHz	18 nm	272.62	-	183 ft
				33 km	269.06		183 m
27R	LOC-ILS	IHNW	108.90 MHz	18 nm	272.59	-	183 ft
				33 km	269.03		183 m
09L	GS	IHNE	108.30 MHz	10 nm	92.59	3.00	187 ft
				19 km	89.03		187 m
09R	GS	IHSE	108.70 MHz	10 nm	92.62	3.00	183 ft
				19 km	89.06		183 m
27L	GS	IHSW	109.50 MHz	10 nm	272.62	3.00	183 ft
				19 km	269.06		183 m
27R	GS	IHNW	108.90 MHz	10 nm	272.59	3.00	183 ft
				19 km	269.03		183 m