

KBOS

General Edward Lawrence Logan Intl


KMCO

Orlando Intl

2024/05/08 2115Z

KBOS HTO **VS1** ORF **J121** CHS **V1** STARY **V437** JETSO KMCO

996.91 nm / 1846.28 km

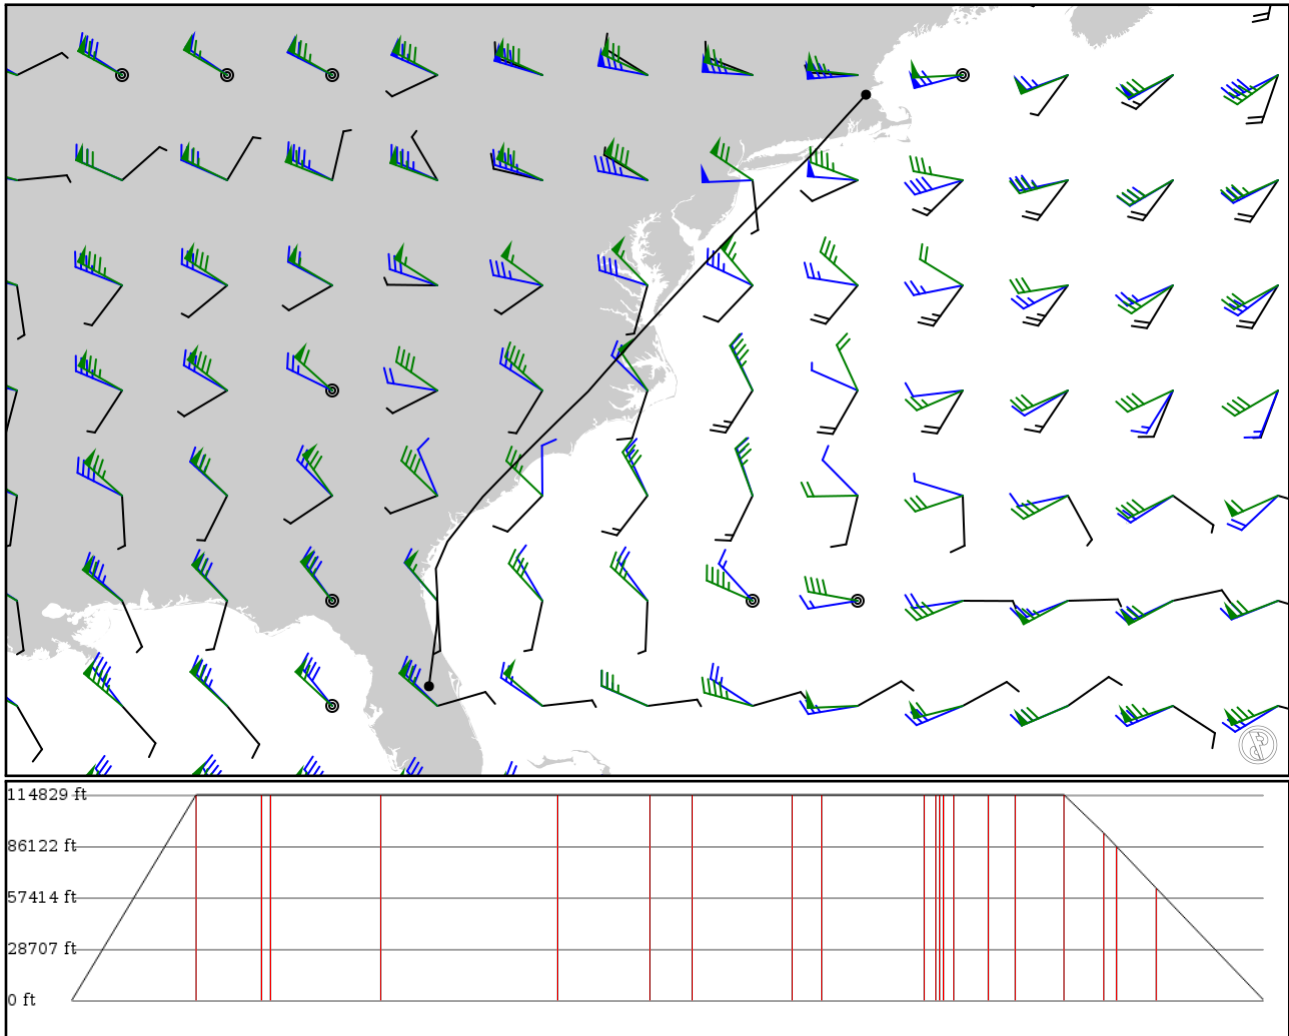

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KBOS	-	42.36300	0 ft	-	General Edward Lawrence Logan Intl	
APT	-	-71.00680	0 m			
HTO	-	40.91900	35,000 ft	104	HAMPTON (EAST HAMPTON)	
VOR	-	-72.31670	10,668 m			
FATON	VS1	40.20760	35,000 ft	53	-	
FIX	AWY-HI	-73.03930	10,668 m			
TAAPS	VS1	40.09920	35,000 ft	8	-	
FIX	AWY-HI	-73.14770	10,668 m			
DASHA	VS1	38.87200	35,000 ft	92	-	
FIX	AWY-HI	-74.34450	10,668 m			
ORF	VS1	36.89190	35,000 ft	147	NORFOLK	
VOR	AWY-HI	-76.20030	10,668 m			
WEAVR	J121	35.85390	35,000 ft	76	-	
FIX	AWY-HI	-77.13430	10,668 m			
ISO	J121	35.37090	35,000 ft	35	KINSTON	
VOR	AWY-HI	-77.55830	10,668 m			
BARTL	J121	34.30320	35,000 ft	83	-	
FIX	AWY-HI	-78.65150	10,668 m			
JMACK	J121	33.98850	35,000 ft	24	-	
FIX	AWY-HI	-78.96660	10,668 m			
CHS	J121	32.89430	35,000 ft	84	CHARLESTON	
VOR	AWY-HI	-80.03780	10,668 m			
COTAK	V1	32.75580	35,000 ft	10	-	
FIX	AWY-LO	-80.14830	10,668 m			
ROOFS	V1	32.70460	35,000 ft	3	-	
FIX	AWY-LO	-80.18910	10,668 m			
HONAP	V1	32.66020	35,000 ft	3	-	
FIX	AWY-LO	-80.22440	10,668 m			
BASSO	V1	32.54890	35,000 ft	8	-	
FIX	AWY-LO	-80.31270	10,668 m			
RUBYS	V1	32.14530	35,000 ft	29	-	
FIX	AWY-LO	-80.63050	10,668 m			
TYBEE	V1	31.83810	35,000 ft	22	-	
FIX	AWY-LO	-80.87020	10,668 m			
STARY	V1	31.20130	35,000 ft	40	-	
FIX	AWY-LO	-81.14460	10,668 m			
HOTAR	V437	30.63980	28,500 ft	33	-	
FIX	AWY-LO	-81.11270	8,687 m			
SUBER	V437	30.45680	26,200 ft	10	-	
FIX	AWY-LO	-81.11260	7,986 m			
JETSO	V437	29.90890	19,100 ft	32	-	
FIX	AWY-LO	-81.11270	5,822 m			
KMCO	-	28.42920	0 ft	89	Orlando Intl	
APT	-	-81.30680	0 m			

KBOS

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 6

Elevation: 19 ft / 6 m
Location: 42.363000 -71.006800
Magnetic Var: 14.287 W

METAR

KBOS 082054Z 08010KT 6SM -RA BR OVC006 14/13 A2951 RMK AO2 LTG DSNT W RAB53 PRESFR SLP992 P0000 60000 T01390128 580

TAF

TAF AMD KBOS 082004Z 0820/0924 02007KT 5SM BR OVC006 FM082100 VRB10G20KT 2SM -TSRA BR OVC008CB FM082230 02004KT 2SM

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 121.65 MHz - CLEARANCE DELIVERY	GND - 121.75 MHz - BOSTON GROUND
GND - 121.90 MHz - BOSTON GROUND	TWR - 128.80 MHz - BOSTON TOWER
TWR - 124.72 MHz - BOSTON TOWER	TWR - 132.22 MHz - BOSTON TOWER
APP - 118.25 MHz - BOSTON APPROACH	APP - 120.60 MHz - BOSTON APPROACH
APP - 127.20 MHz - BOSTON APPROACH	DEP - 133.00 MHz - BOSTON DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	148 ft	10,092 ft	135.27	ASPHALT	883 ft	197 ft
	45 m	3,076 m	149.56		269 m	60 m
33L	148 ft	10,092 ft	315.29	ASPHALT	0 ft	167 ft
	45 m	3,076 m	329.57		0 m	51 m
04R	148 ft	10,012 ft	19.69	ASPHALT	1,155 ft	420 ft
	45 m	3,052 m	33.97		352 m	128 m
22L	148 ft	10,012 ft	199.69	ASPHALT	1,201 ft	200 ft
	45 m	3,052 m	213.98		366 m	61 m
04L	148 ft	7,871 ft	19.66	ASPHALT	0 ft	1,250 ft
	45 m	2,399 m	33.94		0 m	381 m
22R	148 ft	7,871 ft	199.66	ASPHALT	820 ft	200 ft
	45 m	2,399 m	213.95		250 m	61 m
09	148 ft	7,008 ft	76.51	ASPHALT	0 ft	932 ft
	45 m	2,136 m	90.80		0 m	284 m
27	148 ft	7,008 ft	256.53	ASPHALT	0 ft	161 ft
	45 m	2,136 m	270.82		0 m	49 m
14	98 ft	5,005 ft	125.76	ASPHALT	0 ft	0 ft
	30 m	1,526 m	140.05		0 m	0 m
32	98 ft	5,005 ft	305.77	ASPHALT	0 ft	801 ft
	30 m	1,526 m	320.06		0 m	244 m
15L	98 ft	2,558 ft	135.31	ASPHALT	0 ft	305 ft
	30 m	780 m	149.59		0 m	93 m
33R	98 ft	2,558 ft	315.31	ASPHALT	0 ft	59 ft
	30 m	780 m	329.60		0 m	18 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IBOS	110.30 MHz	18 nm	-	-	35 ft
				33 km	-		35 m
15R	DME	IMDC	110.70 MHz	18 nm	-	-	27 ft
				33 km	-		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	DME	ILQN	110.30 MHz	18 nm 33 km	- -	-	35 ft 35 m
27	DME	IDGU	111.30 MHz	18 nm 33 km	- -	-	28 ft 28 m
33L	DME	ILIP	110.70 MHz	18 nm 33 km	- -	-	19 ft 19 m
04R	LOC-ILS	IBOS	110.30 MHz	18 nm 33 km	19.68 33.97	-	20 ft 20 m
15R	LOC-ILS	IMDC	110.70 MHz	18 nm 33 km	135.28 149.57	-	20 ft 20 m
22L	LOC-ILS	ILQN	110.30 MHz	18 nm 33 km	199.68 213.97	-	20 ft 20 m
27	LOC-ILS	IDGU	111.30 MHz	18 nm 33 km	256.52 270.81	-	20 ft 20 m
33L	LOC-ILS	ILIP	110.70 MHz	18 nm 33 km	315.28 329.57	-	20 ft 20 m
04R	GS	IBOS	110.30 MHz	10 nm 19 km	19.68 33.97	3.00	20 ft 20 m
15R	GS	IMDC	110.70 MHz	10 nm 19 km	135.28 149.57	3.00	20 ft 20 m
22L	GS	ILQN	110.30 MHz	10 nm 19 km	199.68 213.97	3.00	20 ft 20 m
27	GS	IDGU	111.30 MHz	10 nm 19 km	256.52 270.81	3.00	20 ft 20 m
33L	GS	ILIP	110.70 MHz	10 nm 19 km	315.28 329.57	3.00	20 ft 20 m

KMCO

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 96 ft / 29 m
Location: 28.429200 -81.306800
Magnetic Var: 6.994 W

METAR

KMCO 082053Z VRB06G17KT 10SM FEW055 34/19 A2987 RMK A02 SLP114 T03440189 56012

TAF

TAF AMD KMCO 082101Z 0821/0924 18009KT P6SM VCSH SCT060 FM090300 18005KT P6SM FEW070 FM091400 21010KT P6SM SKC FM091800 21010KT P6SM SKC

Frequencies

REC - 120.52 MHz - D-ATIS
CLD - 134.70 MHz - CLEARANCE DELIVERY
GND - 126.40 MHz - ORLANDO GROUND
TWR - 124.30 MHz - ORLANDO TOWER
APP - 119.40 MHz - ORLANDO APPROACH
APP - 124.80 MHz - ORLANDO APPROACH
APP - 123.85 MHz - ORLANDO APPROACH
DEP - 119.40 MHz - ORLANDO DEPARTURE
DEP - 124.80 MHz - ORLANDO DEPARTURE

REC - 121.25 MHz - D-ATIS
COM - 122.95 MHz - UNICOM
GND - 121.80 MHz - ORLANDO GROUND
TWR - 118.45 MHz - ORLANDO TOWER
APP - 120.15 MHz - ORLANDO APPROACH
APP - 135.30 MHz - ORLANDO APPROACH
APP - 134.05 MHz - ORLANDO APPROACH
DEP - 120.15 MHz - ORLANDO DEPARTURE
DEP - 135.30 MHz - ORLANDO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	151 ft	10,036 ft	179.47	CONCRETE	0 ft	404 ft
	46 m	3,059 m	186.46		0 m	123 m
35L	151 ft	10,036 ft	359.47	CONCRETE	0 ft	400 ft
	46 m	3,059 m	6.46		0 m	122 m
17L	151 ft	9,028 ft	179.48	CONCRETE	0 ft	400 ft
	46 m	2,752 m	186.47		0 m	122 m
35R	151 ft	9,028 ft	359.48	CONCRETE	0 ft	404 ft
	46 m	2,752 m	6.47		0 m	123 m
18L	200 ft	12,049 ft	179.46	CONCRETE	0 ft	400 ft
	61 m	3,673 m	186.45		0 m	122 m
36R	200 ft	12,049 ft	359.46	CONCRETE	0 ft	407 ft
	61 m	3,673 m	6.45		0 m	124 m
18R	200 ft	12,049 ft	179.45	ASPHALT	0 ft	909 ft
	61 m	3,673 m	186.45		0 m	277 m
36L	200 ft	12,049 ft	359.45	ASPHALT	0 ft	702 ft
	61 m	3,673 m	6.45		0 m	214 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	IARK	110.95 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
17R	DME	IDIZ	111.75 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
18R	DME	ITFE	111.90 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
35L	DME	IDDO	110.50 MHz	18 nm	-	-	100 ft
				33 km	-		100 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
35R	DME	ICER	111.15 MHz	18 nm	-	-	90 ft
				33 km	-		90 m
36R	DME	IOJP	110.70 MHz	18 nm	-	-	91 ft
				33 km	-		91 m
17L	LOC-ILS	IARK	110.95 MHz	18 nm	179.46	-	96 ft
				33 km	186.45		96 m
17R	LOC-ILS	IDIZ	111.75 MHz	18 nm	179.51	-	96 ft
				33 km	186.50		96 m
18R	LOC-ILS	ITFE	111.90 MHz	18 nm	179.50	-	96 ft
				33 km	186.49		96 m
35L	LOC-ILS	IDDO	110.50 MHz	18 nm	359.51	-	96 ft
				33 km	6.50		96 m
35R	LOC-ILS	ICER	111.15 MHz	18 nm	359.46	-	96 ft
				33 km	6.45		96 m
36R	LOC-ILS	IOJP	110.70 MHz	18 nm	359.50	-	96 ft
				33 km	6.49		96 m
17L	GS	IARK	110.95 MHz	10 nm	179.46	3.00	96 ft
				19 km	186.45		96 m
17R	GS	IDIZ	111.75 MHz	10 nm	179.51	3.00	96 ft
				19 km	186.50		96 m
18R	GS	ITFE	111.90 MHz	10 nm	179.50	3.00	96 ft
				19 km	186.49		96 m
35L	GS	IDDO	110.50 MHz	10 nm	359.51	3.00	96 ft
				19 km	6.50		96 m
35R	GS	ICER	111.15 MHz	10 nm	359.46	3.00	96 ft
				19 km	6.45		96 m
36R	GS	IOJP	110.70 MHz	10 nm	359.50	3.00	96 ft
				19 km	6.49		96 m