


KLGA
La Guardia

KBOS
General Edward Lawrence Logan Intl

2024/05/02 1815Z

KLGA BLATT KBOS

160.14 nm / 296.59 km

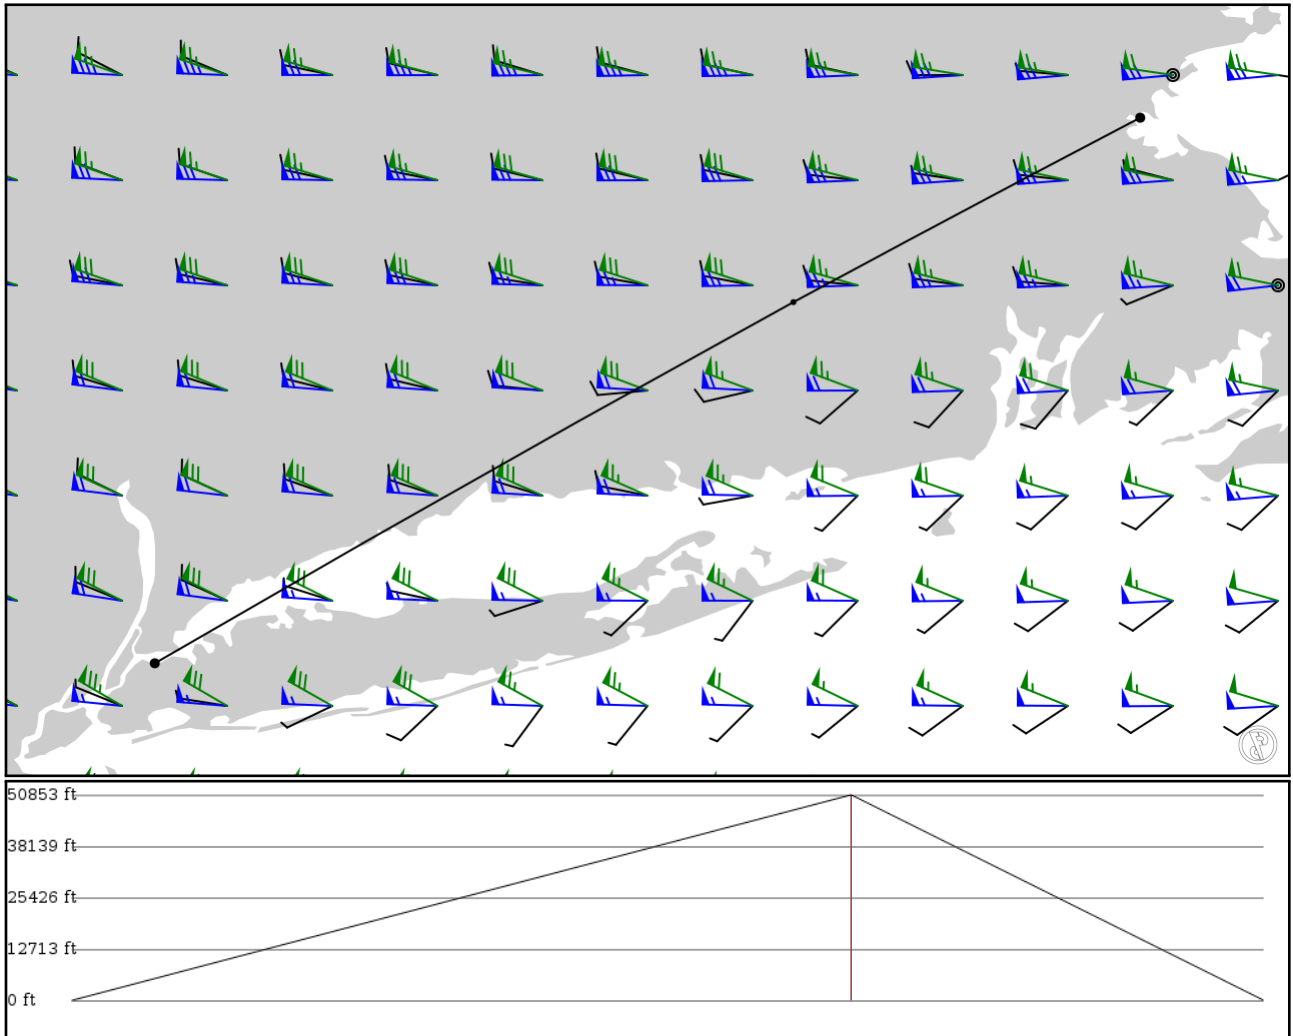

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 30000ft
- Cruise Speed: 320kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
KLGA	-	40.77720	0 ft	-	La Guardia	
APT	-	-73.87260	0 m			
BLATT	-	41.82700	15,500 ft	104	-	
FIX	-	-72.01530	4,724 m			
KBOS	-	42.36300	0 ft	55	General Edward Lawrence Logan Intl	
APT	-	-71.00680	0 m			

KLGA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 21 ft / 6 m
Location: 40.777200 -73.872600
Magnetic Var: 12.803 W

METAR

KLGA 021751Z 15009KT 10SM SCT250 23/13 A2988 RMK A02 SLP119 T02280133 10233 20122 56025

TAF

KLGA 021722Z 0218/0324 23006KT P6SM FEW250 FM022100 28010G18KT P6SM SCT250 FM030100 35008KT P6SM FEW250 FM030800

Frequencies

REC - 125.95 MHz - ATIS ARRIVAL	REC - 127.05 MHz - ATIS DEPARTURE
TWR - 118.70 MHz - LAGUARDIA TOWER	GND - 121.70 MHz - LAGUARDIA GROUND
GND - 121.85 MHz - LAGUARDIA GROUND	GND - 127.67 MHz - LAGUARDIA GROUND
CLD - 121.87 MHz - LAGUARDIA CLEARANCE	CLD - 135.20 MHz - LAGUARDIA CLEARANCE
COM - 122.95 MHz - LAGUARDIA UNICOM	APP - 132.70 MHz - NEW YORK APPROACH
APP - 120.05 MHz - NEW YORK APPROACH	APP - 120.80 MHz - NEW YORK APPROACH
APP - 124.95 MHz - NEW YORK APPROACH	APP - 127.30 MHz - NEW YORK APPROACH
APP - 128.80 MHz - NEW YORK APPROACH	DEP - 120.40 MHz - NEW YORK DEPARTURE
DEP - 124.45 MHz - NEW YORK DEPARTURE	DEP - 127.05 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	150 ft	7,006 ft	32.03	ASPHALT	0 ft	322 ft
	46 m	2,135 m	44.83		0 m	98 m
22	150 ft	7,006 ft	212.04	ASPHALT	0 ft	98 ft
	46 m	2,135 m	224.84		0 m	30 m
13	150 ft	6,994 ft	122.24	ASPHALT	0 ft	95 ft
	46 m	2,132 m	135.04		0 m	29 m
31	150 ft	6,994 ft	302.25	ASPHALT	0 ft	374 ft
	46 m	2,132 m	315.06		0 m	114 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13	DME	IGDI	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
31	DME	IPZV	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
04	LOC-ILS	ILGA	110.50 MHz	18 nm	32.04	-	21 ft
				33 km	44.84		21 m
13	LOC-ILS	IGDI	108.50 MHz	18 nm	122.25	-	21 ft
				33 km	135.05		21 m
22	LOC-ILS	IURD	110.50 MHz	18 nm	212.04	-	21 ft
				33 km	224.84		21 m
31	LOC-LOC	IPZV	108.50 MHz	18 nm	302.25	-	21 ft
				33 km	315.05		21 m
04	GS	ILGA	110.50 MHz	10 nm	32.04	3.10	21 ft
				19 km	44.84		21 m
13	GS	IGDI	108.50 MHz	10 nm	122.25	3.10	21 ft
				19 km	135.05		21 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	GS	IURD	110.50 MHz	10 nm	212.04	3.00	21 ft
				19 km	224.84		21 m

KBOS

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 6

Elevation: 19 ft / 6 m
Location: 42.363000 -71.006800
Magnetic Var: 14.288 W

METAR

KBOS 021754Z 18009KT 10SM FEW026 FEW200 18/12 A2988 RMK A02 SLP118 T01830117 10183 20100 56020

TAF

TAF KBOS 021720Z 0218/0324 18009KT P6SM FEW025 FM022200 04010G17KT P6SM VCSH SCT015 BKN050 FM030000 02010G18KT 6SM

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 121.65 MHz - CLEARANCE DELIVERY	GND - 121.75 MHz - BOSTON GROUND
GND - 121.90 MHz - BOSTON GROUND	TWR - 128.80 MHz - BOSTON TOWER
TWR - 124.72 MHz - BOSTON TOWER	TWR - 132.22 MHz - BOSTON TOWER
APP - 118.25 MHz - BOSTON APPROACH	APP - 120.60 MHz - BOSTON APPROACH
APP - 127.20 MHz - BOSTON APPROACH	DEP - 133.00 MHz - BOSTON DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	148 ft	10,092 ft	135.27	ASPHALT	883 ft	197 ft
	45 m	3,076 m	149.56		269 m	60 m
33L	148 ft	10,092 ft	315.29	ASPHALT	0 ft	167 ft
	45 m	3,076 m	329.58		0 m	51 m
04R	148 ft	10,012 ft	19.69	ASPHALT	1,155 ft	420 ft
	45 m	3,052 m	33.97		352 m	128 m
22L	148 ft	10,012 ft	199.69	ASPHALT	1,201 ft	200 ft
	45 m	3,052 m	213.98		366 m	61 m
04L	148 ft	7,871 ft	19.66	ASPHALT	0 ft	1,250 ft
	45 m	2,399 m	33.94		0 m	381 m
22R	148 ft	7,871 ft	199.66	ASPHALT	820 ft	200 ft
	45 m	2,399 m	213.95		250 m	61 m
09	148 ft	7,008 ft	76.51	ASPHALT	0 ft	932 ft
	45 m	2,136 m	90.80		0 m	284 m
27	148 ft	7,008 ft	256.53	ASPHALT	0 ft	161 ft
	45 m	2,136 m	270.82		0 m	49 m
14	98 ft	5,005 ft	125.76	ASPHALT	0 ft	0 ft
	30 m	1,526 m	140.05		0 m	0 m
32	98 ft	5,005 ft	305.77	ASPHALT	0 ft	801 ft
	30 m	1,526 m	320.06		0 m	244 m
15L	98 ft	2,558 ft	135.31	ASPHALT	0 ft	305 ft
	30 m	780 m	149.59		0 m	93 m
33R	98 ft	2,558 ft	315.31	ASPHALT	0 ft	59 ft
	30 m	780 m	329.60		0 m	18 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IBOS	110.30 MHz	18 nm	-	-	35 ft
				33 km	-		35 m
15R	DME	IMDC	110.70 MHz	18 nm	-	-	27 ft
				33 km	-		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	DME	ILQN	110.30 MHz	18 nm 33 km	- -	-	35 ft 35 m
27	DME	IDGU	111.30 MHz	18 nm 33 km	- -	-	28 ft 28 m
33L	DME	ILIP	110.70 MHz	18 nm 33 km	- -	-	19 ft 19 m
04R	LOC-ILS	IBOS	110.30 MHz	18 nm 33 km	19.68 33.97	-	20 ft 20 m
15R	LOC-ILS	IMDC	110.70 MHz	18 nm 33 km	135.28 149.57	-	20 ft 20 m
22L	LOC-ILS	ILQN	110.30 MHz	18 nm 33 km	199.68 213.97	-	20 ft 20 m
27	LOC-ILS	IDGU	111.30 MHz	18 nm 33 km	256.52 270.81	-	20 ft 20 m
33L	LOC-ILS	ILIP	110.70 MHz	18 nm 33 km	315.28 329.57	-	20 ft 20 m
04R	GS	IBOS	110.30 MHz	10 nm 19 km	19.68 33.97	3.00	20 ft 20 m
15R	GS	IMDC	110.70 MHz	10 nm 19 km	135.28 149.57	3.00	20 ft 20 m
22L	GS	ILQN	110.30 MHz	10 nm 19 km	199.68 213.97	3.00	20 ft 20 m
27	GS	IDGU	111.30 MHz	10 nm 19 km	256.52 270.81	3.00	20 ft 20 m
33L	GS	ILIP	110.70 MHz	10 nm 19 km	315.28 329.57	3.00	20 ft 20 m