


2024/05/03 1414Z

KSSC MEVAE KVUJ

88.17 nm / 163.28 km

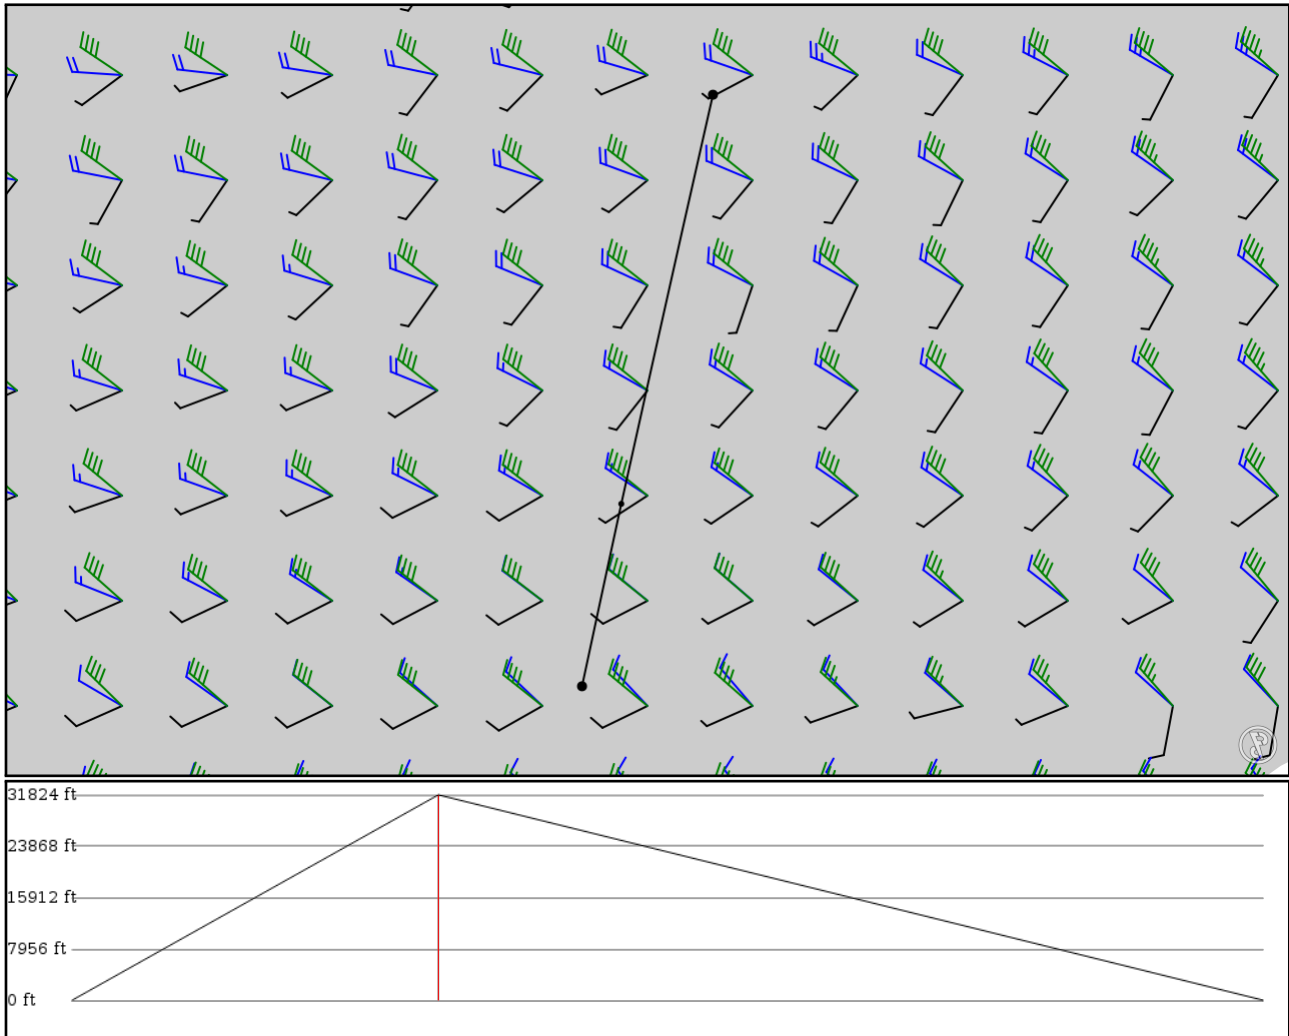

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSSC	-	33.97270	0 ft	-	Shaw AFB
APT	-	-80.47040	0 m		
MEVAE	-	34.41810	9,700 ft	27	-
FIX	-	-80.37450	2,957 m		
KVUJ	-	35.41700	0 ft	60	Stanly Co
APT	-	-80.15060	0 m		

KSSC

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 242 ft / 74 m
Location: 33.972700 -80.470400
Magnetic Var: 8.184 W

METAR

KSSC 031355Z 23005KT 10SM FEW140 SCT220 24/19 A3005 RMK A02A SLP175 \$

TAF

TAF AMD KSSC 031200Z 0312/0413 19006KT 6000 BR SCT005 QNH3003INS TEMPO 0312/0313 3200 BR BKN002 BECMG 0312/0313 21

Frequencies

REC - 132.12 MHz - ATIS
GND - 126.10 MHz - GROUND
APP - 125.40 MHz - APP/DEP
CLD - 121.80 MHz - DELIVERY
TWR - 126.65 MHz - TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	10,035 ft	34.59	CONCRETE	0 ft	984 ft
	46 m	3,059 m	42.77		0 m	300 m
22R	150 ft	10,035 ft	214.60	CONCRETE	0 ft	1,001 ft
	46 m	3,059 m	222.78		0 m	305 m
04R	150 ft	8,011 ft	34.60	CONCRETE	0 ft	1,010 ft
	46 m	2,442 m	42.78		0 m	308 m
22L	150 ft	8,011 ft	214.61	CONCRETE	0 ft	1,017 ft
	46 m	2,442 m	222.79		0 m	310 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	LOC-ILS	ISSC	110.10 MHz	18 nm	34.60	-	242 ft
				33 km	42.78		242 m
22R	LOC-ILS	IJWU	108.70 MHz	18 nm	214.60	-	242 ft
				33 km	222.78		242 m
04L	GS	ISSC	110.10 MHz	10 nm	34.60	2.80	242 ft
				19 km	42.78		242 m
22R	GS	IJWU	108.70 MHz	10 nm	214.60	2.82	242 ft
				19 km	222.78		242 m

KVUJ

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 609 ft / 186 m
Location: 35.417000 -80.150600
Magnetic Var: 8.569 W

METAR

KVUJ 031345Z AUTO 27005KT 10SM CLR 24/18 A3009 RMK A02 T02370179

TAF

UNKNOWN

Frequencies

REC - 128.17 MHz - AWOS 3
COM - 123.00 MHz - UNICOM
CLD - 128.50 MHz - CLNC DEL
TWR - 126.27 MHz -
COM - 126.27 MHz - CTAF
CLD - 121.75 MHz - CLNC DEL
GND - 121.75 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	98 ft	5,503 ft	40.85	ASPHALT	0 ft	0 ft
	30 m	1,677 m	49.42		0 m	0 m
22L	98 ft	5,503 ft	220.86	ASPHALT	0 ft	0 ft
	30 m	1,677 m	229.43		0 m	0 m
04L	75 ft	3,501 ft	40.86	ASPHALT	0 ft	0 ft
	23 m	1,067 m	49.43		0 m	0 m
22R	75 ft	3,501 ft	220.86	ASPHALT	0 ft	0 ft
	23 m	1,067 m	229.43		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	LOC-ILS	IVUJ	110.55 MHz	18 nm	219.02	-	609 ft
				33 km	227.59		609 m
22L	GS	IVUJ	110.55 MHz	10 nm	221.71	3.00	572 ft
				19 km	230.28		572 m