

# LIPZ

Venezia-Tessera "Marco Polo"


# LIML

Milano-Linate "Enrico Forlanini"

2024/05/07 2112Z

LIPZ VAKON LIML

129.61 nm / 240.04 km

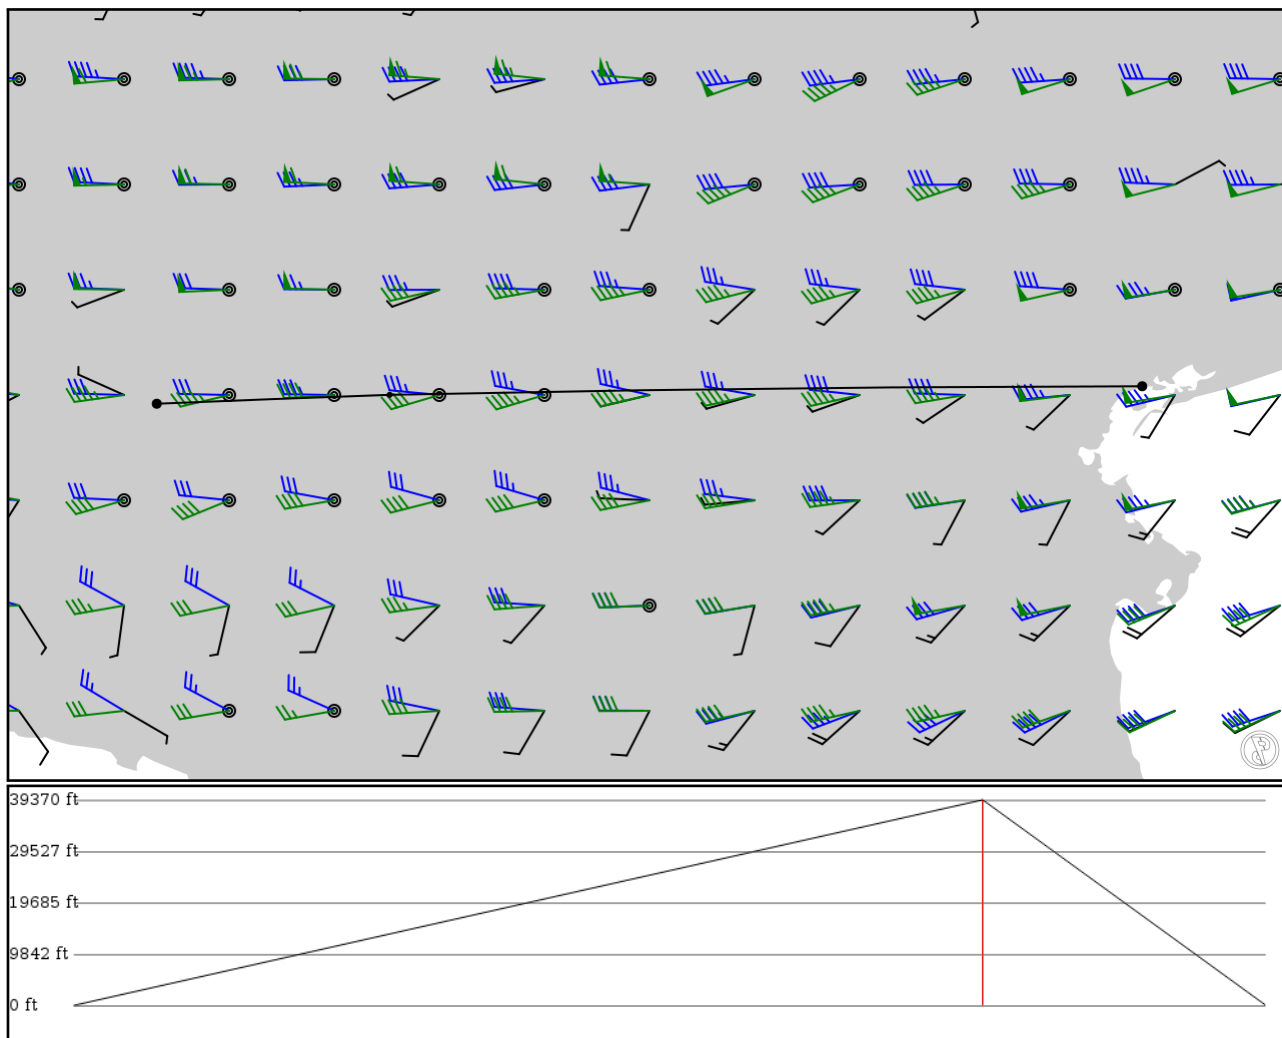

## Notes

Basic altitude profile:

- Ascent Rate: 1000ft/min
- Ascent Speed: 80kts
- Cruise Altitude: 12000ft
- Cruise Speed: 100kts
- Descent Rate: 1000ft/min
- Descent Speed: 80kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: no

## Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
LIPZ	-	45.50480	0 ft	-	Venezia-Tessera	"Marco Polo"
APT	-	12.34970	0 m			
VAKON	-	45.47810	12,000 ft	98	-	
FIX	-	10.00000	3,658 m			
LIML	-	45.45030	0 ft	30	Milano-Linate	"Enrico Forlanini"
APT	-	9.27281	0 m			

## LIPZ

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 4 ft / 1 m  
Location: 45.504800 12.349700  
Magnetic Var: 3.904 E

## METAR

LIPZ 072050Z 36004KT 9999 BKN050 15/13 Q1014 NOSIG

## TAF

LIPZ 071700Z 0718/0824 03006KT 9999 FEW010 SCT060 TEMPO 0802/0806 4000 BCFG BECMG 0811/0813 15010KT BECMG 0819/08

## Frequencies

REC - 128.65 MHz - ATIS  
TWR - 120.20 MHz - VENEZIA TOWER  
APP - 118.25 MHz - VENEZIA APPROACH  
GND - 121.70 MHz - VENEZIA GROUND  
APP - 118.90 MHz - VENEZIA APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	148 ft	10,836 ft	42.03	ASPHALT	0 ft	0 ft
	45 m	3,303 m	38.12		0 m	0 m
22L	148 ft	10,836 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	3,303 m	218.14		0 m	0 m
04L	148 ft	9,129 ft	42.03	ASPHALT	318 ft	0 ft
	45 m	2,782 m	38.13		97 m	0 m
22R	148 ft	9,129 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	2,782 m	218.14		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	VTS	109.95 MHz	18 nm	-	-	26 ft
				33 km	-		26 m
04R	LOC-ILS	VTS	109.95 MHz	18 nm	42.04	-	4 ft
				33 km	38.14		4 m
04R	GS	VTS	109.95 MHz	10 nm	42.04	3.00	4 ft
				19 km	38.14		4 m

## LIML

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 354 ft / 108 m  
Location: 45.450300 9.272810  
Magnetic Var: 3.238 E

## METAR

LIML 072050Z VRB02KT 9999 -RA SCT020 BKN045 14/13 Q1015 NOSIG

## TAF

TAF LIML 071700Z 0718/0818 VRB05KT 9999 BKN050 TEMPO 0718/0722 3000 TSRA BKN008 BKN050 TEMPO 0722/0803 3000 SHRA

## Frequencies

REC - 136.37 MHz - ATIS	GND - 121.80 MHz - LINATE GROUND
TWR - 118.40 MHz - LINATE TOWER	TWR - 118.10 MHz - LINATE TOWER
APP - 134.17 MHz - MILANO RADAR	APP - 126.75 MHz - MILANO RADAR
APP - 126.30 MHz - MILANO RADAR	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	197 ft	8,019 ft	175.67	ASPHALT	0 ft	200 ft
	60 m	2,444 m	172.43		0 m	61 m
36	197 ft	8,019 ft	355.67	ASPHALT	0 ft	413 ft
	60 m	2,444 m	352.43		0 m	126 m
17	72 ft	1,974 ft	175.66	ASPHALT	0 ft	0 ft
	22 m	602 m	172.42		0 m	0 m
35	72 ft	1,974 ft	355.66	ASPHALT	0 ft	0 ft
	22 m	602 m	352.42		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36	DME	ILNT	109.55 MHz	25 nm	-	-	352 ft
				46 km	-		352 m
36	LOC-ILS	ILNT	109.55 MHz	18 nm	355.69	-	353 ft
				33 km	352.45		353 m
36	GS	ILNT	109.55 MHz	10 nm	355.68	3.00	352 ft
				19 km	352.44		352 m